



# KLV-S19A10/S23A10

## SERVICE MANUAL

*US Model*  
*Canadian Model*

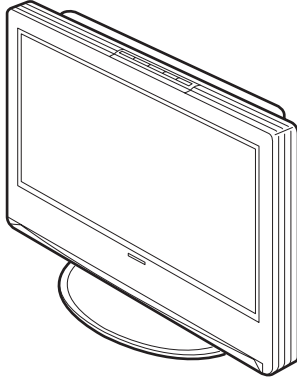

KLV-S19A10

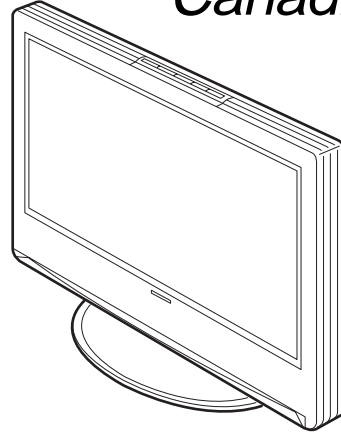

KLV-S23A10

**WAX** CHASSIS

### SPECIFICATIONS

**Television system:**

American TV standard

**Channel coverage:**

VHF: 2-13/UHF: 14-69/CATV: 1-125

**Antenna:**

75-ohm external terminal for VHF/UHF

**Screen size (measured diagonally):**

KLV-S19A10: 19 inches

KLV-S23A10: 23 inches

**Panel System:**

LCD (Liquid Crystal Display) Panel

**Display resolution (horizontal × vertical):**

KLV-S19A10: 1,280 dots × 768 lines

KLV-S23A10: 1,366 dots × 768 lines

**VIDEO IN 1/2/3:**

S VIDEO (4-pin mini DIN):

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative

C: 0.286 Vp-p (Burst signal), 75 ohms

VIDEO: 1 Vp-p, 75 ohms unbalanced, sync negative

AUDIO: 500 mVrms (100% modulation)

Impedance: 47 kilohms

**HD/DVD IN 4:**

YPbPr (Component Video):

Y: 1.0 Vp-p, 75 ohms unbalanced, sync negative

Pb: 0.7 Vp-p, 75 ohms

Pr: 0.7 Vp-p, 75 ohms

Signal format: 480i, 480p, 720p, 1080i

AUDIO: 500 mVrms (100% modulation)

Impedance: 47 kilohms

**HDMI IN 5:**

HDMI:

Video: 480i, 480p, 720p, 1080i

Audio: Two channel linear PCM 32, 44.1 and 48 kHz, 16, 20 and 24 bits

AUDIO: 500 mVrms (100% modulation)

Impedance: 47 kilohms

**AUDIO OUT:**

500 mVrms (100% modulation)

More than 1 Vrms at the maximum volume setting (Variable)

More than 500 mVrms (Fixed)

**PC IN 6:**

D-sub 15-pin, analog RGB, 0.7 Vp-p, 75 ohms, positive

**PC AUDIO INPUT:**

Stereo mini jack, 0.5 Vrms, 1 kilohm

**Headphones:**

Stereo mini jack

Impedance: 16 ohms

FLAT PANEL COLOR TV  
**SONY®**

**Speaker:**

Full range:  $4 \times 10 \text{ cm}$  ( $15 \frac{7}{8} \times 39 \frac{3}{8} \text{ inches}$ ) (2)

**Speaker output:**

5 W + 5 W

**Power requirement:**

KLV-S23A10: 120-240 V AC, 50/60 Hz

KLV-S19A10: 18 V DC, with AC power adaptor

**AC power adaptor for KLV-S19A10:**

Model name: AC-FD008

Rating: Input AC 100 V-240 V  
50/60 Hz, 128 W

Output DC 18 V 6.11 A

**Power consumption:**

In use: KLV-S19A10: 95 W

KLV-S23A10: 110 W

In standby: KLV-S19A10: Less than 1.3 W

KLV-S23A10: Less than 1 W

Dimensions (W/H/D):

KLV-S19A10: (with stand)  $468 \times 402 \times 218 \text{ mm}$   
( $18 \frac{1}{2} \times 15 \frac{7}{8} \times 8 \frac{5}{8} \text{ inches}$ )

(without stand)  $468 \times 364 \times 84 \text{ mm}$

( $18 \frac{1}{2} \times 14 \frac{3}{8} \times 3 \frac{3}{8} \text{ inches}$ )

KLV-S23A10: (with stand)  $566 \times 448 \times 218 \text{ mm}$   
( $22 \frac{3}{8} \times 17 \frac{3}{4} \times 8 \frac{5}{8} \text{ inches}$ )

(without stand)  $566 \times 411 \times 89 \text{ mm}$

( $22 \frac{3}{8} \times 16 \frac{1}{4} \times 3 \frac{5}{8} \text{ inches}$ )

**Mass:**

KLV-S19A10: (with stand) 9.9 kg (21 lb. 14 oz.)

(without stand) 6.3 kg (13 lb. 15 oz.)

KLV-S23A10: (with stand) 12.3 kg (27 lb. 2 oz.)

(without stand) 8.7 kg (19 lb. 3 oz.)

**Supplied accessories:**

Remote control RM-YA001 (1)

Size AA batteries (2)

75-ohm coaxial cable (1)

AC power cord (1)

AC power adaptor (1) (KLV-S19A10 only)

HD15-HD15 cable (1)

Support belt (1), securing screw (1) and wood screw (1)

Operating Instructions (1)

Quick Setup Guide (1)

Leaflet (Installing the Wall-Mount Bracket to the TV) (1)

Warranty Card (1)

**Optional accessories:**

Headphones plug adaptor

Connecting cables

Wall-Mount Bracket SU-WL11 (KLV-S19A10)

SU-LW1 (KLV-S23A10)




**Optional accessories' availability may depend on its stock.**

Design and specifications are subject to change without notice.

## WARNINGS AND CAUTIONS

### CAUTION


-  These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

### WARNING!!

An isolation transformer should be used during any service to avoid possible shock hazard, because of live chassis. The chassis of this receiver is directly connected to the ac power line.




### SAFETY-RELATED COMPONENT WARNING!!

Components identified by shading and  mark on the schematic diagrams, exploded views, and in the parts list are critical for safe operation. Replace these components with Sony parts whose part numbers appear as shown in this manual or in supplements published by Sony. Circuit adjustments that are critical for safe operation are identified in this manual. Follow these procedures whenever critical components are replaced or improper operation is suspected.

---


### ATTENTION!!

-  Ces instructions de service sont à l'usage du personnel de service qualifié seulement. Pour prévenir le risque de choc électrique, ne pas faire l'entretien autre que celui contenu dans le Mode d'emploi à moins que vous soyez qualifié faire ainsi.

Afin d'éviter tout risque d'électrocution provenant d'un châssis sous tension, un transformateur d'isolement doit être utilisé lors de tout dépannage. Le châssis de ce récepteur est directement raccordé à l'alimentation du secteur.



### ATTENTION AUX COMPOSANTS RELATIFS A LA SECURITE!!

Les composants identifiés par une trame et par une marque  sur les schémas de principe, les vues explosées et les listes de pièces sont d'une importance critique pour la sécurité du fonctionnement. Ne les remplacer que par des composants Sony dont le numéro de pièce est indiqué dans le présent manuel ou dans des suppléments publiés par Sony. Les réglages de circuit dont l'importance est critique pour la sécurité du fonctionnement sont identifiés dans le présent manuel. Suivre ces procédures lors de chaque remplacement de composants critiques, ou lorsqu'un mauvais fonctionnement suspecte.

## SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are “pinched” or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described right.

### LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes).

Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instruments.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

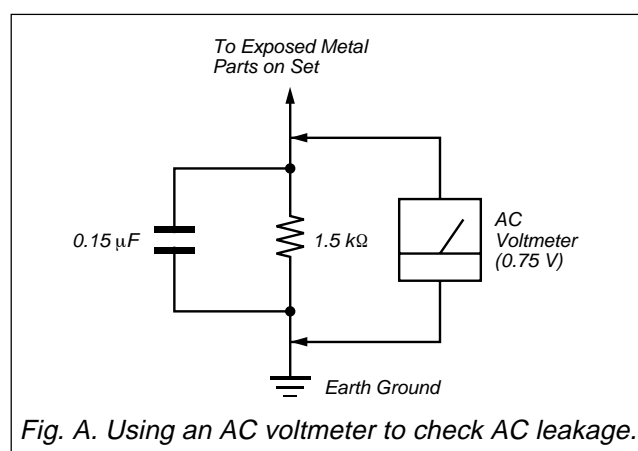


Fig. A. Using an AC voltmeter to check AC leakage.

### WARNING!!

**SAFETY-RELATED COMPONENT WARNING!!**  
COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

### AVERTISSEMENT!!

**ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!**  
LES COMPOSANTS IDENTIFIÉS PAR UNE TRAME ET UNE MARQUE ! SONT CRITIQUES POUR LA SÉCURITÉ. NE LES REMPLACER QUE PAR UNE PIÈCE PORTANT LE NUMÉRO SPECIFIÉ. LES RÉGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SÉCURITÉ DU FONCTIONNEMENT SONT IDENTIFIÉS DANS LE PRÉSENT MANUEL. SUIVRE CES PROCÉDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONCTIONNEMENT EST SUSPECTÉ.




# TABLE OF CONTENTS

<b>1. SELF-DIAGNOSIS FUNCTION .....</b>	<b>1-1</b>	4-2. FRAME DIAGRAMS .....	4-8
1-1. CONTROL BUTTONS .....	1-1	4-2-1. KLV-S19A10 .....	4-8
1-2. LED BLINKING PATTERNS AND MONITORING ITEMS .....	1-2	4-2-2. KLV-S23A10 .....	4-9
<b>2. DISASSEMBLY .....</b>	<b>2-1</b>	4-3. CIRCUIT BOARDS LOCATION .....	4-10
2-1. KLV-S19A10 .....	2-1	4-3-1. KLV-S19A10 .....	4-10
2-1-1. STAND ASSY REMOVAL .....	2-1	4-3-2. KLV-S23A10 .....	4-10
2-1-2. REAR CABINET ASSY REMOVAL .....	2-1	4-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS .....	4-10
2-1-3. H1 BOARD REMOVAL .....	2-2	(1) Schematic Diagrams of A1U Board (KLV-S19A10 Only) .....	4-11
2-1-4. VESA BRACKET, SIDE BRACKET ASSY AND S1 SHEILD TOP REMOVAL .....	2-2	(2) Schematic Diagrams of A2U Board (KLV-S23A10 Only) .....	4-17
2-1-5. A1U BOARD AND SIDE JACK HOLDER ASSY REMOVAL .....	2-3	(3) Schematic Diagram of G1 Board (KLV-S23A10 Only) .....	4-23
2-1-6. P BOARD REMOVAL .....	2-3	(4) Schematic Diagram of H1 and H2 Boards (H2:KLV-S23A10 Only) .....	4-25
2-1-7. TU BOARD REMOVAL .....	2-4	(5) Schematic Diagram of H3 Board .....	4-26
2-1-8. B BOARD REMOVAL .....	2-4	(6) Schematic Diagram of TU Board .....	4-27
2-1-9. H3 BOARD AND SPEAKER REMOVAL .....	2-5	(7) Schematic Diagram of P Board .....	4-28
2-1-10. LCD PANEL REMOVAL .....	2-6	4-5. SEMICONDUCTORS .....	4-30
2-2. KLV-S23A10 .....	2-7	<b>5. EXPLODED VIEWS .....</b>	<b>5-1</b>
2-2-1. STAND ASSY REMOVAL .....	2-7	5-1. KLV-S19A10 .....	5-2
2-2-2. REAR CABINET REMOVAL .....	2-7	5-1-1. REAR CABINET ASSY AND STAND ASSY .....	5-2
2-2-3. H1 BOARD REMOVAL .....	2-8	5-1-2. CHASSIS-1 .....	5-3
2-2-4. PLATE BRIDGE ASSY AND ARM (L), (R) REMOVAL .....	2-8	5-1-3. CHASSIS-2 .....	5-4
2-2-5. S1 SHEILD TOP, SIDE BRACKET ASSY AND BOTTOM BRACKET REMOVAL ....	2-9	5-1-4. CHASSIS-3 .....	5-5
2-2-6. G1 AND H2 BOARDS REMOVAL .....	2-9	5-1-5. LCD PANEL .....	5-6
2-2-7. A2U BOARD REMOVAL .....	2-10	5-1-6. PACKING MATERIALS .....	5-7
2-2-8. P AND TU BOARDS REMOVAL .....	2-10	5-2. KLV-S23A10 .....	5-8
2-2-9. B BOARD REMOVAL .....	2-11	5-2-1. REAR CABINET ASSY AND STAND ASSY .....	5-8
2-2-10. H3 BOARD AND SPEAKER REMOVAL .....	2-11	5-2-2. CHASSIS-1 .....	5-9
2-2-11. LCD PANEL REMOVAL .....	2-12	5-2-3. CHASSIS-2 .....	5-10
<b>3. SERVICE MODE .....</b>	<b>3-1</b>	5-2-4. CHASSIS-3 .....	5-11
3-1. DISPLAYING SERVICE MENU .....	3-1	5-2-5. CHASSIS-4 .....	5-12
3-2. ADJUSTMENT USING THE SERVICE MENU .....	3-1	5-2-6. LCD PANEL .....	5-13
<b>4. DIAGRAMS .....</b>	<b>4-1</b>	5-2-7. PACKING MATERIALS .....	5-14
4-1. BLOCK DIAGRAMS .....	4-1	<b>6. ELECTRICAL PARTS LIST .....</b>	<b>6-1</b>
(1) A1U (1/2) and TU boards (KLV-S19A10 Only) .....	4-1		
(2) A1U (2/2) board (KLV-S19A10 Only) .....	4-2		
(3) A2U (1/2), TU and H2 boards (KLV-S23A10 Only) .....	4-3		
(4) A2U (2/2) board (KLV-S23A10 Only) .....	4-4		
(5) B, H1 and H3 boards .....	4-5		
(6) G1 board (KLV-S23A10 Only) .....	4-6		
(7) P board .....	4-7		

# SECTION 1

## SELF-DIAGNOSIS FUNCTION

### 1-1. CONTROL BUTTONS

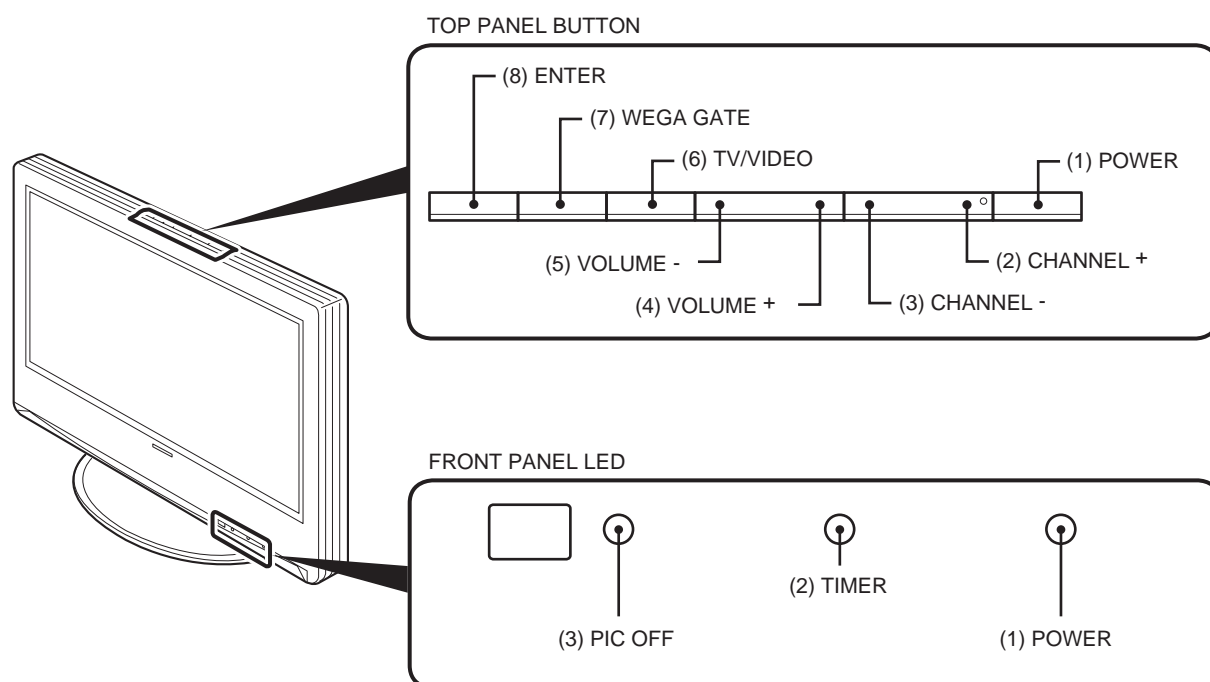

#### • Description of LED indicators

LED	LED type	Description
POWER LED	Red/green LED	Lights green while the TV set is powered on. Lights red during recording. Lights during timer recording. Also functions as an aging failure indicator.
TIMER LED	Red LED	Lights during standby mode. Also functions as an aging failure indicator.
PIC OFF LED	Red/green LED	Lights when timer is set. Lights while no picture is displayed. Blinks during communication. With respect to communication, this LED is controlled by the main microcomputer in response to blinking/lighting instructions from the DTT module.

#### • LED control

Status	Power LED	Timer LED	Picture Off LED	Remarks
Power Off	Off	Off	Off	This status is made by power off with the power switch or remote control. Standby state does not exist in WAX-U/C. However, the microcomputer enters into the sleep mode.
Power On	Lights green	Off	Off	Microcomputer works normally.
Failure	Blinks red	Off	Off	Failure causes are classified by number of red blinking times.
Aging	Blinks green	Off	Off	Aging time is classified by green blinking method.
Picture OFF	Lights green	Off	Lights green	No display (black screen).
OFF Timer	Lights green	Lights red	Off	When OFF TIMER is set during power-on.
	Lights green	Lights red	Lights green	When OFF TIMER is set with black screen.
ON Timer	Off	Lights red	Off	When ON TIMER is set during power-off.
	Lights green	Lights red	Off	When ON TIMER is set during power-on.
	Lights green	Lights red	Lights green	When ON TIMER is set with black screen.

## 1-2. LED BLINKING PATTERNS AND MONITORING ITEMS

- (1) The following table shows LED blinking patterns to be used for reporting causes in the case of safety shutdown.
- (2) Since the TV set is provided with many failure items, causes of shutdown can be identified by the following blinking patterns.


### • Diagnosis items based on blinking patterns

Number of TIMER LED blinking times	Monitoring item
Once	Abnormal AU power voltage (DCALERT 3)
Twice	Abnormal D5V/A9V voltage (DCALERT 2)
3 times	Abnormal panel/HFE voltage (DCALERT 1)
4 times	Backlight failure
5 times	Abnormal main power voltage
6 times	Abnormal speaker voltage
7 times	Internal temperature rise (mainly on the panel side)
8 times	Trident IC failure

## SECTION 2 DISASSEMBLY


### 2-1. KLV-S19A10

#### 2-1-1. STAND ASSY REMOVAL

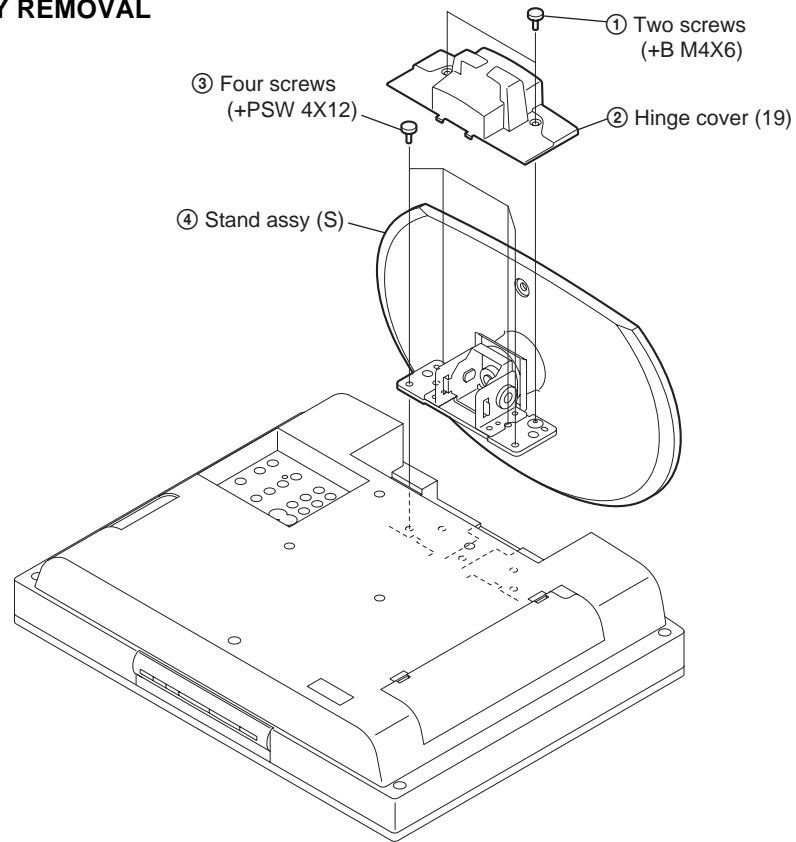


### KLV-S19A10

#### 2-1-2. REAR CABINET ASSY REMOVAL

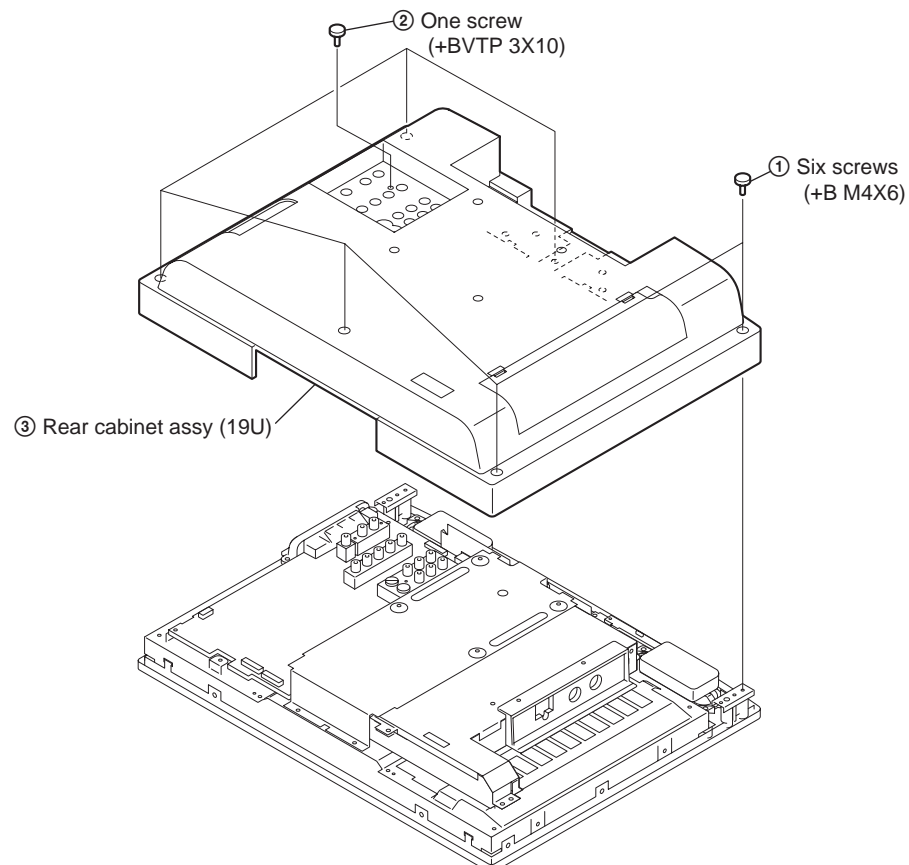


## KLVS19A10

### 2-1-3. H1 BOARD REMOVAL

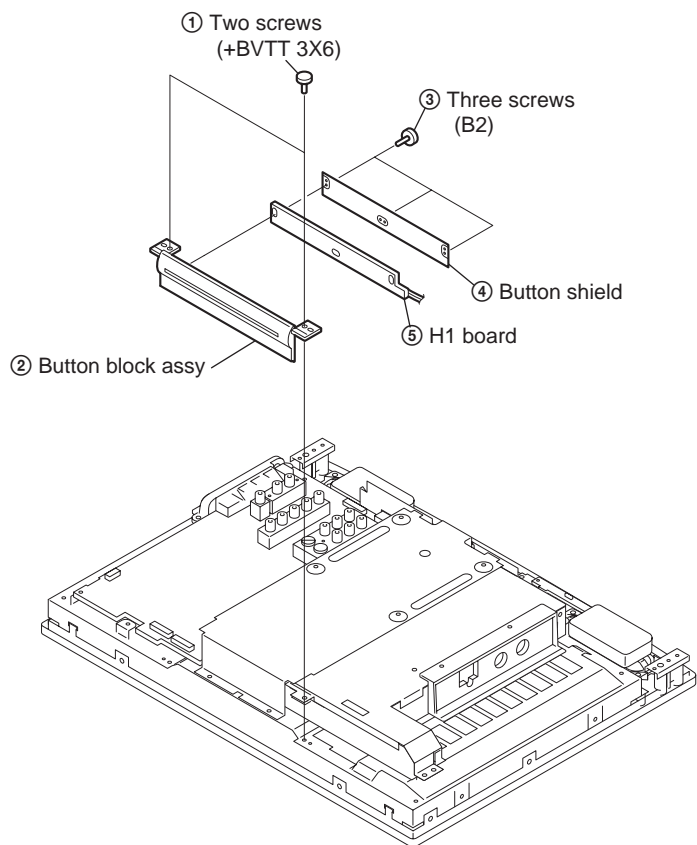


## KLVS19A10

### 2-1-4. VESA BRACKET, SIDE BRACKET ASSY AND S1 SHIELD TOP REMOVAL

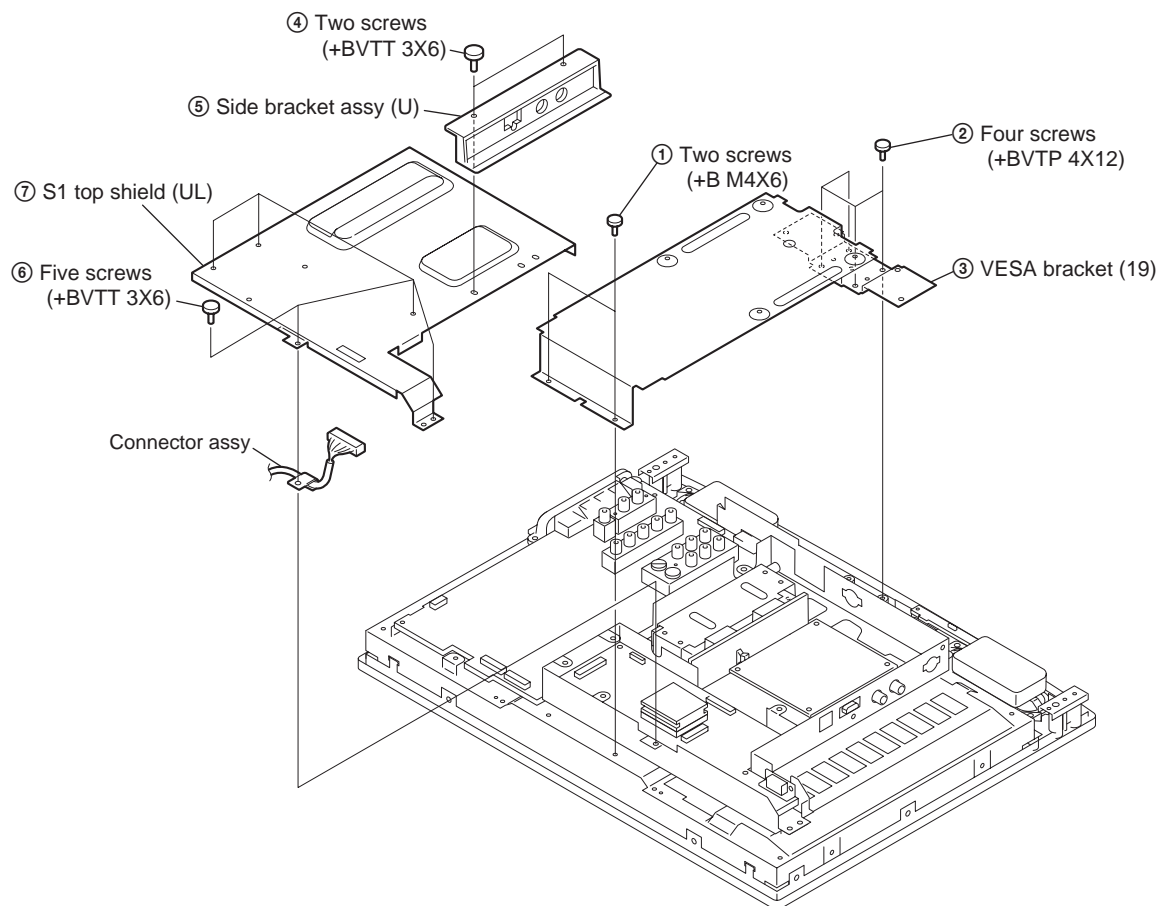


## KLV-S19A10

### 2-1-5. A1U BOARD AND SIDE JACK HOLDER ASSY REMOVAL

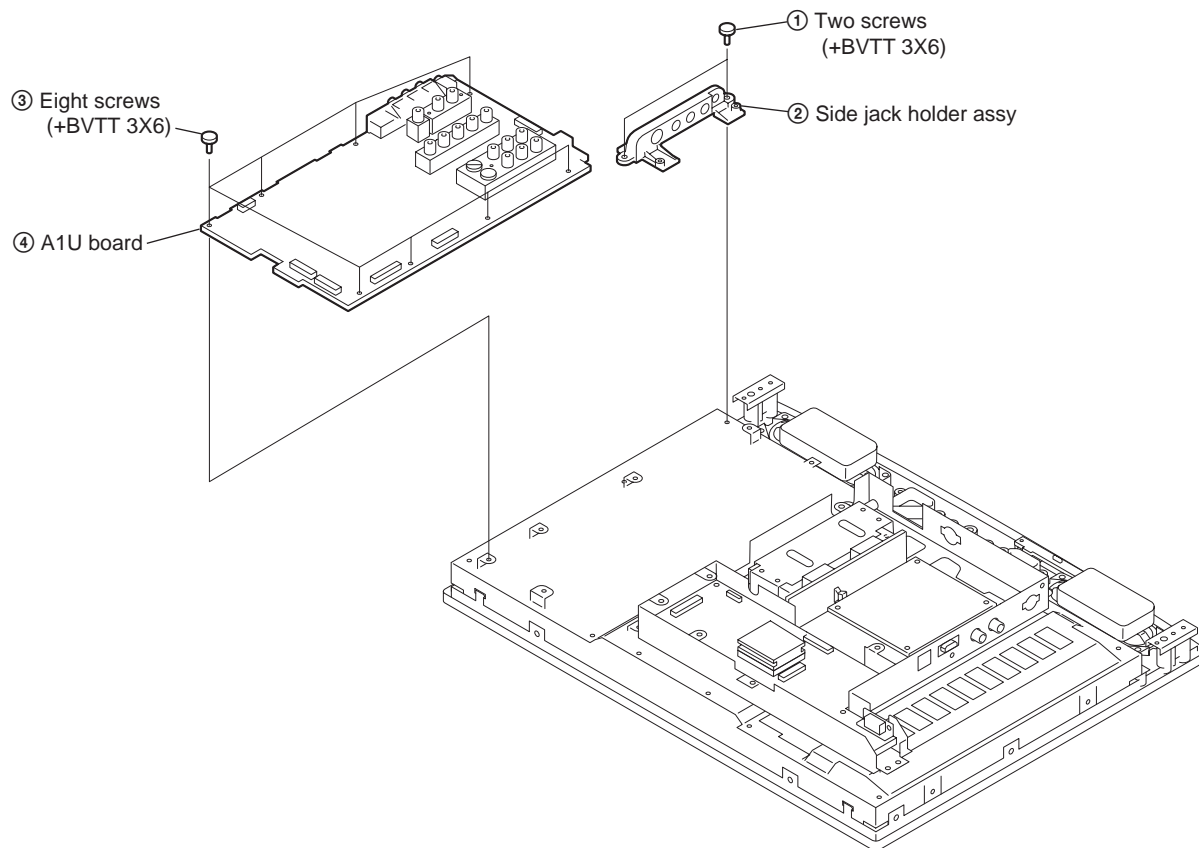


## KLV-S19A10

### 2-1-6. P BOARD REMOVAL

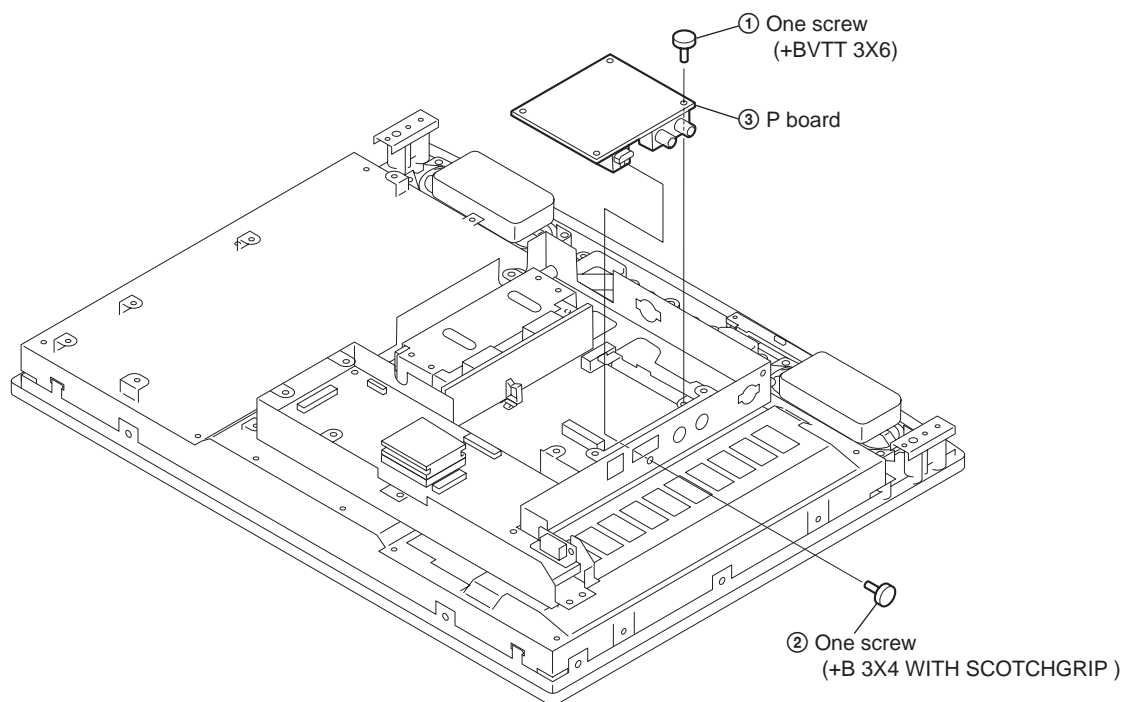


## KLVS19A10

### 2-1-7. TU BOARD REMOVAL

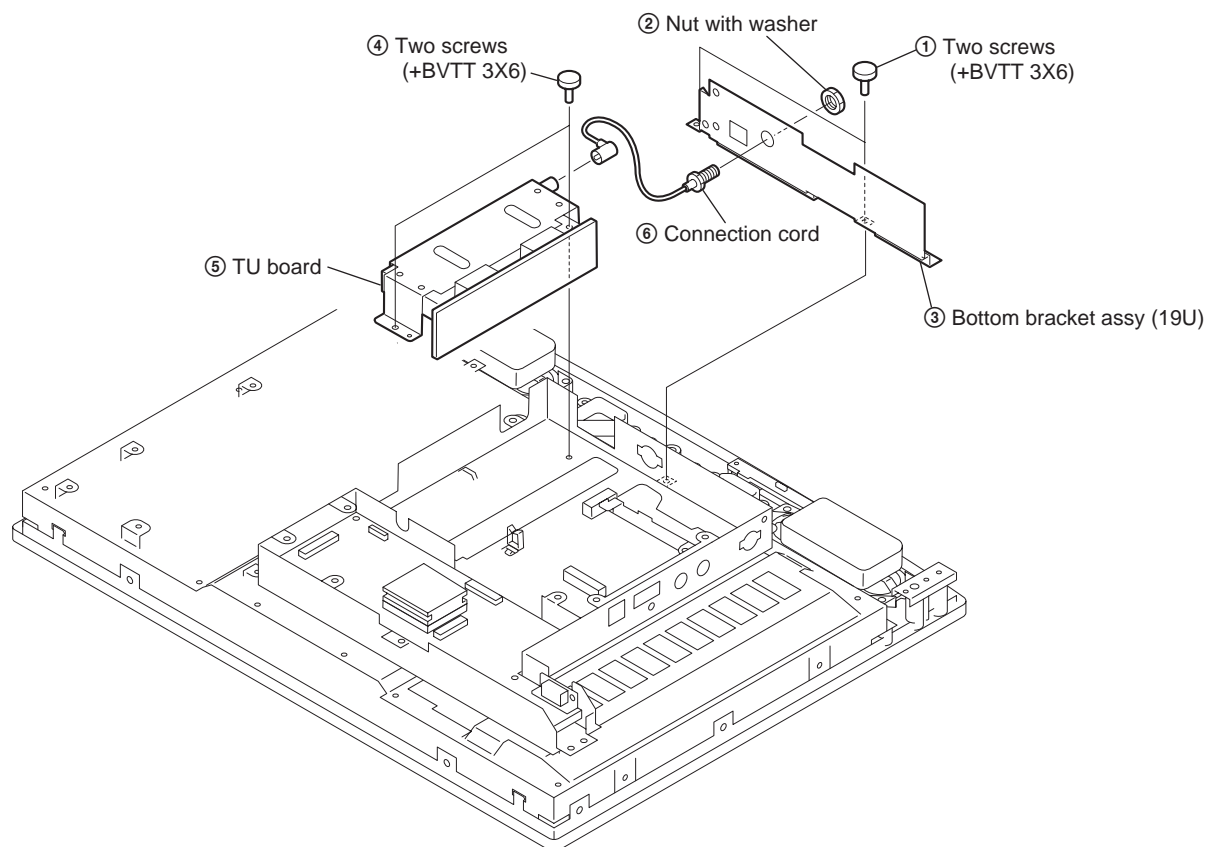


## KLVS19A10

### 2-1-8. B BOARD REMOVAL

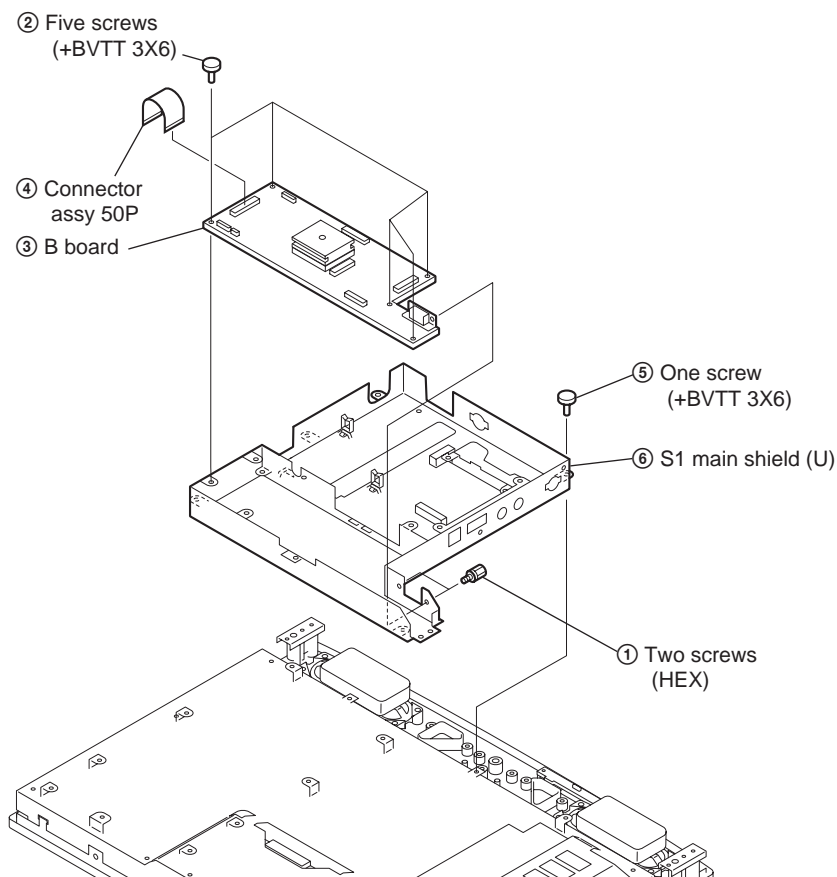


## KLVS19A10

### 2-1-9. H3 BOARD AND SPEAKER REMOVAL

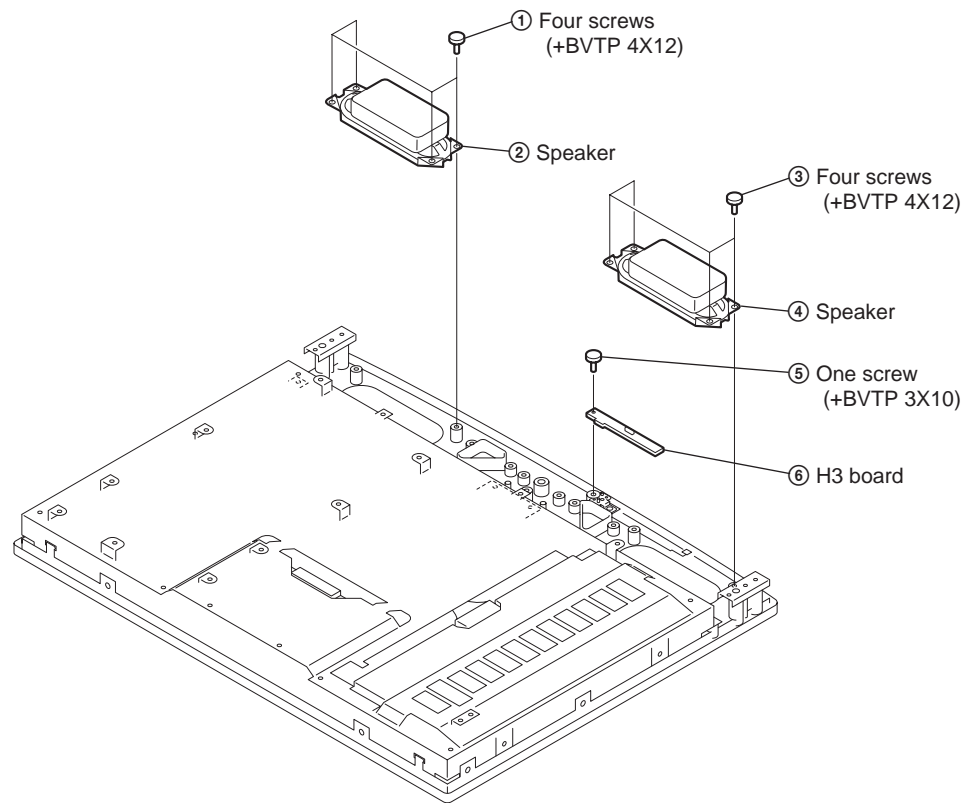




**KLVS19A10**  
**2-1-10. LCD PANEL REMOVAL**

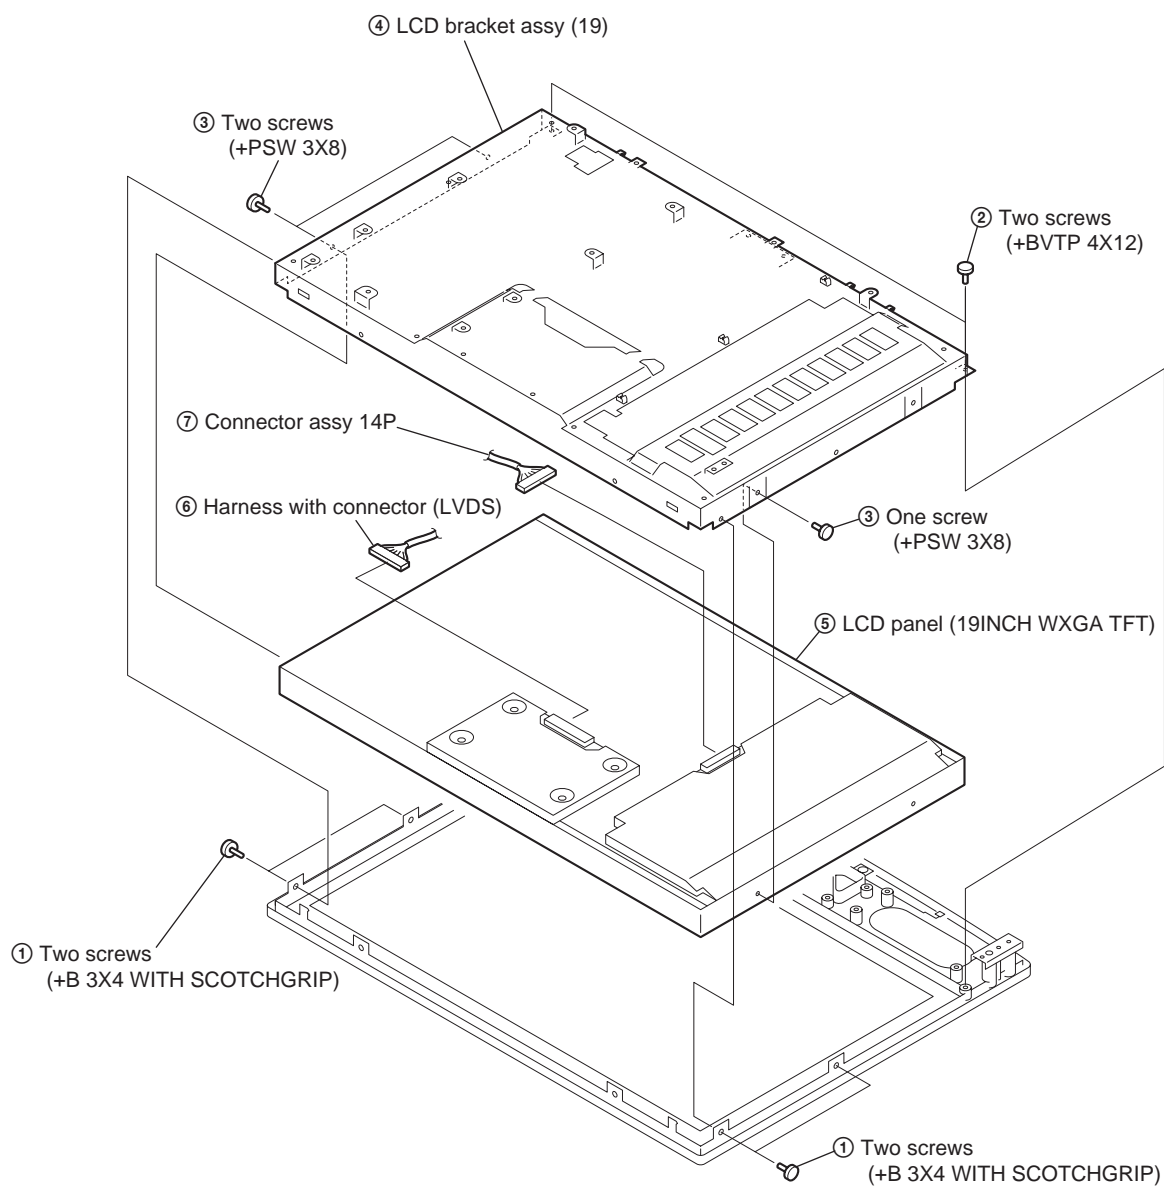


## 2-2. KLV-S23A10

### 2-2-1. STAND ASSY REMOVAL

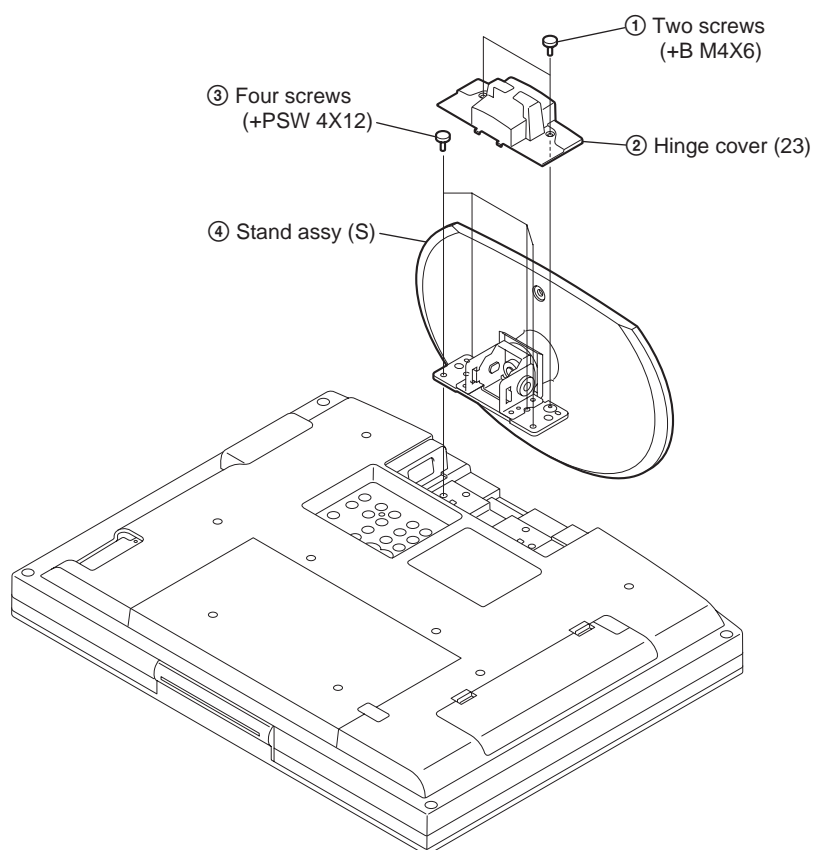


## KLV-S23A10

### 2-2-2. REAR CABINET REMOVAL

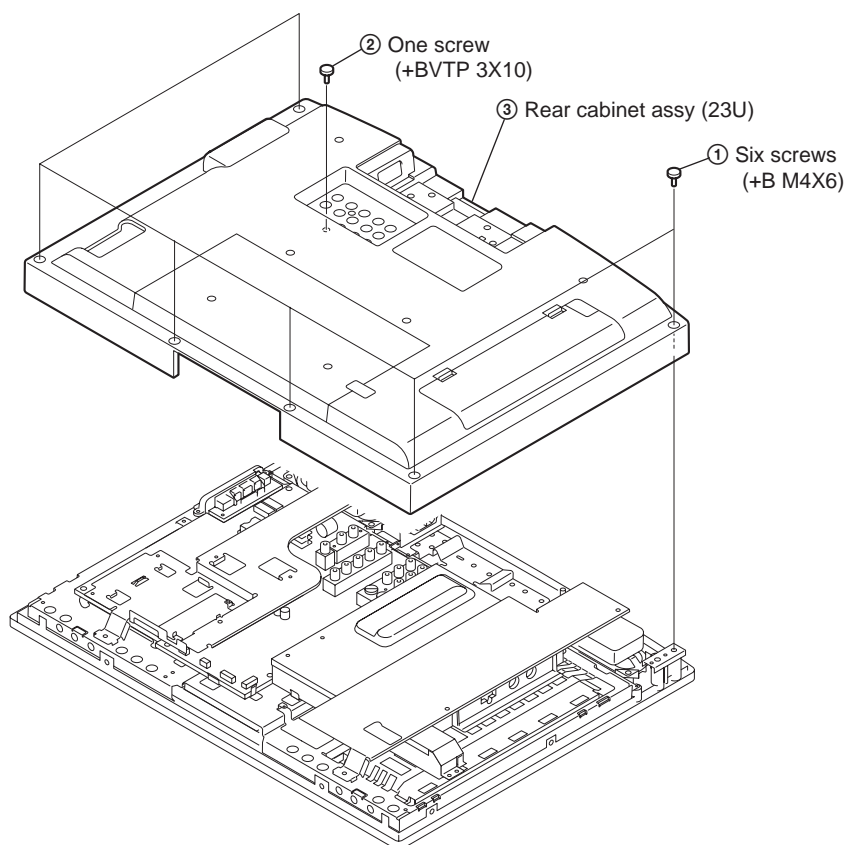


## KLVS23A10

### 2-2-3. H1 BOARD REMOVAL

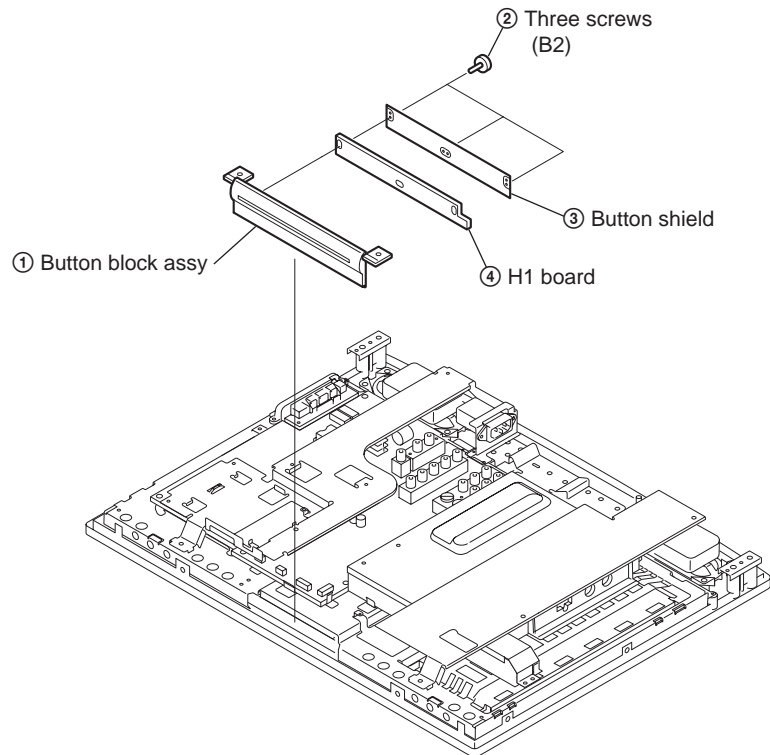


## KLVS23A10

### 2-2-4. PLATE BRIDGE ASSY AND ARM (L), (R) REMOVAL

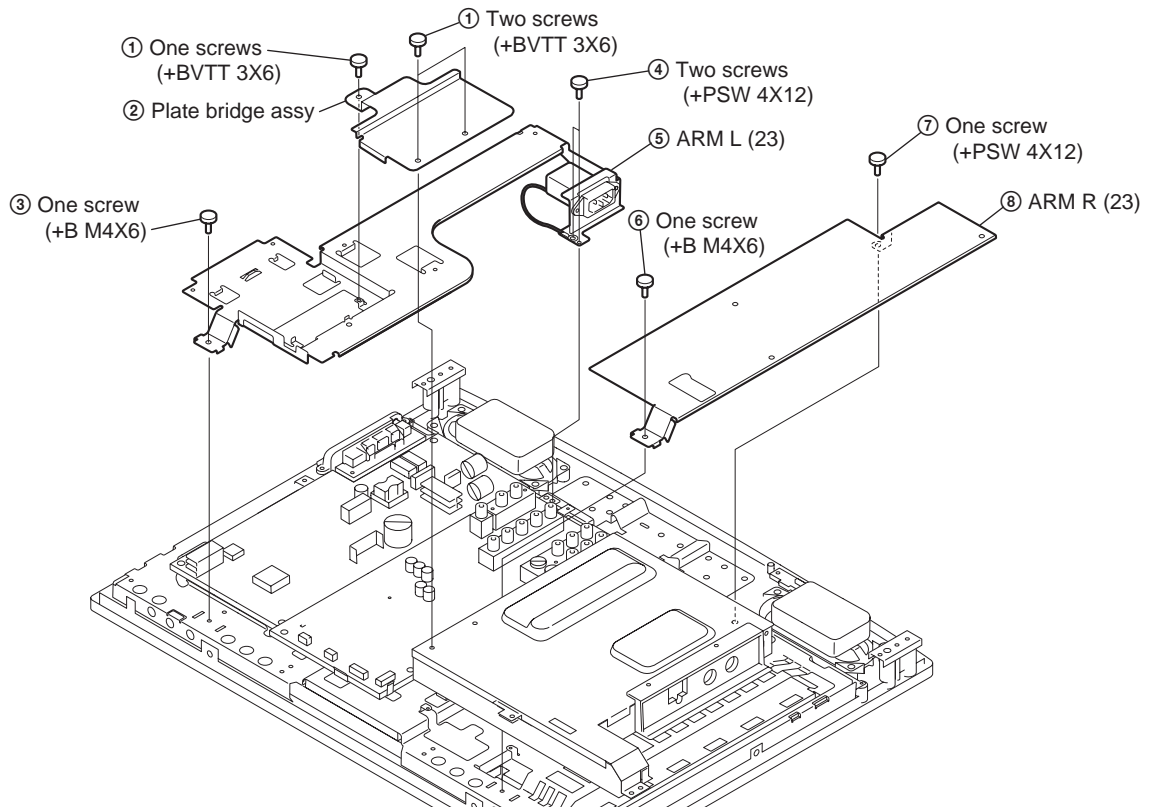


## KLV-S23A10

### 2-2-5. S1 SHEILD TOP, SIDE BRACKET ASSY AND BOTTOM BRACKET REMOVAL

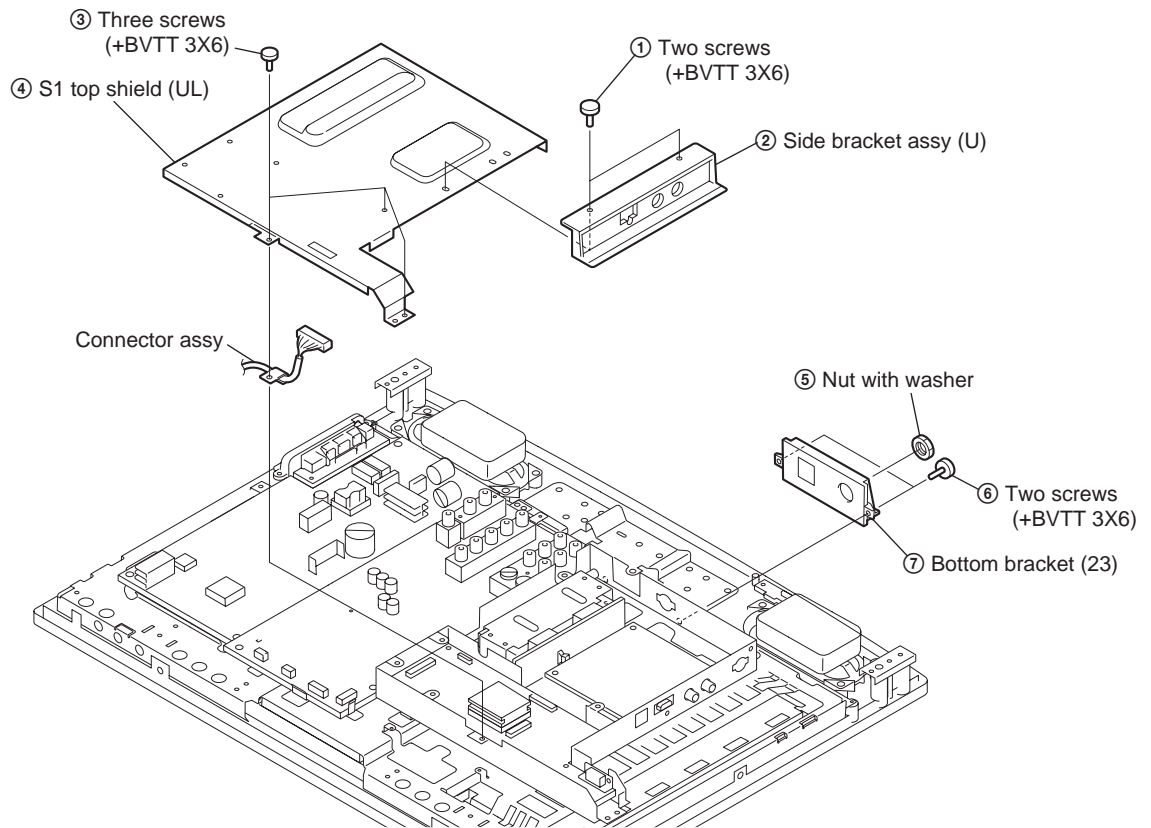


## KLV-S23A10

### 2-2-6. G1 AND H2 BOARDS REMOVAL

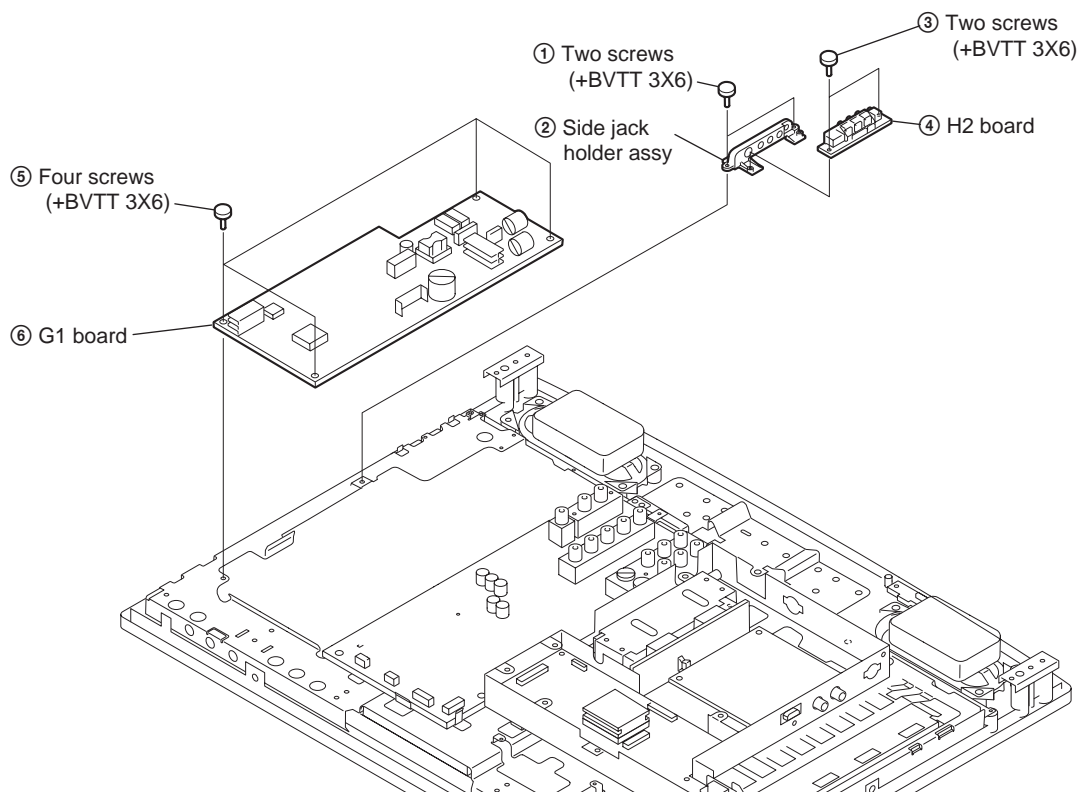


## KLVS23A10

### 2-2-7. A2U BOARD REMOVAL

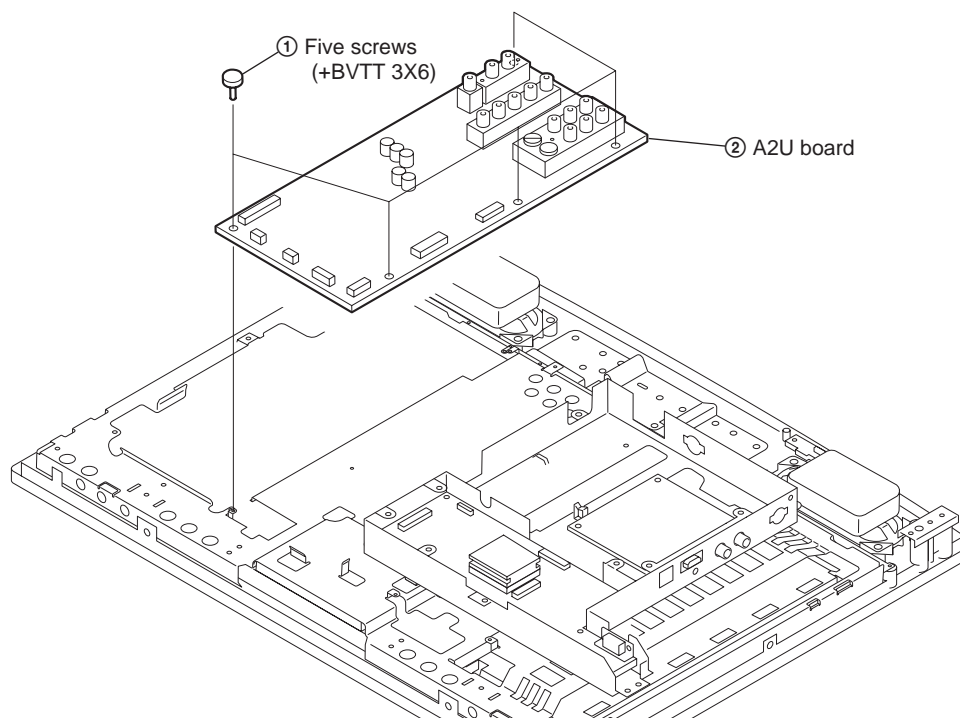


## KLVS23A10

### 2-2-8. P AND TU BOARDS REMOVAL

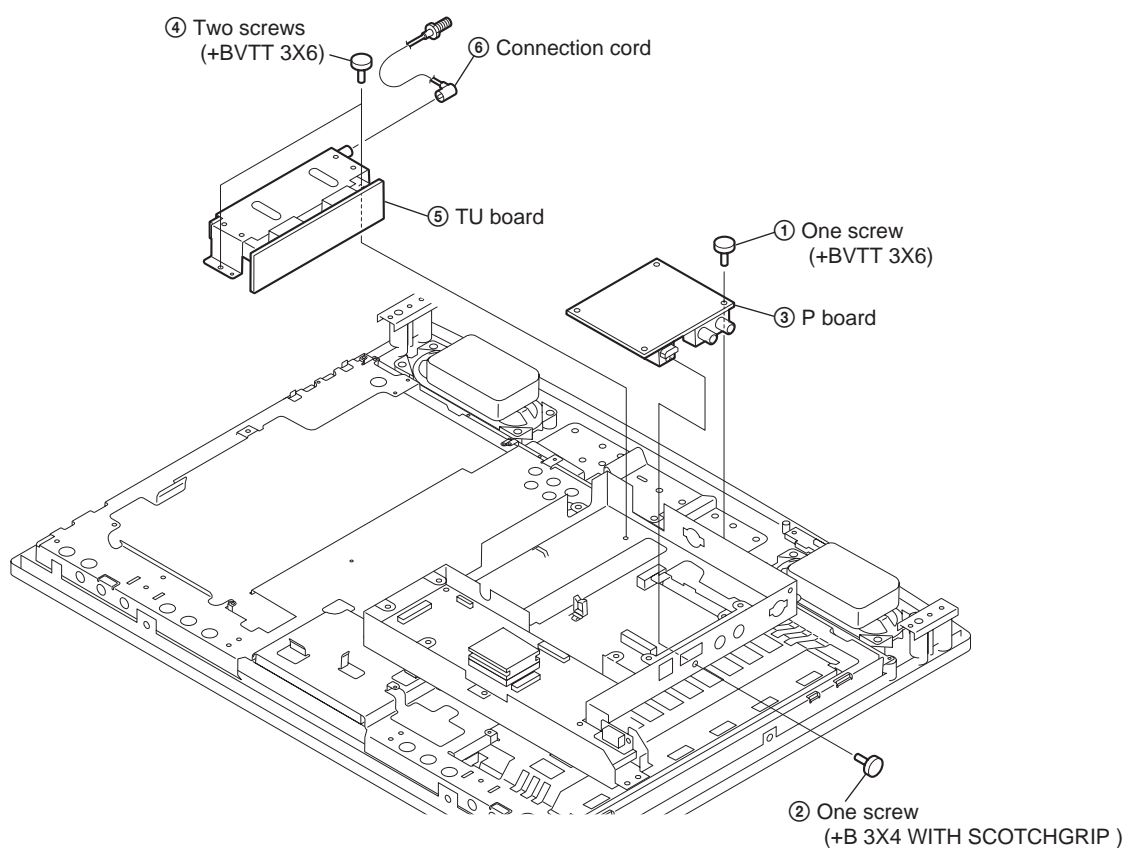


## KLVS23A10

### 2-2-9. B BOARD REMOVAL

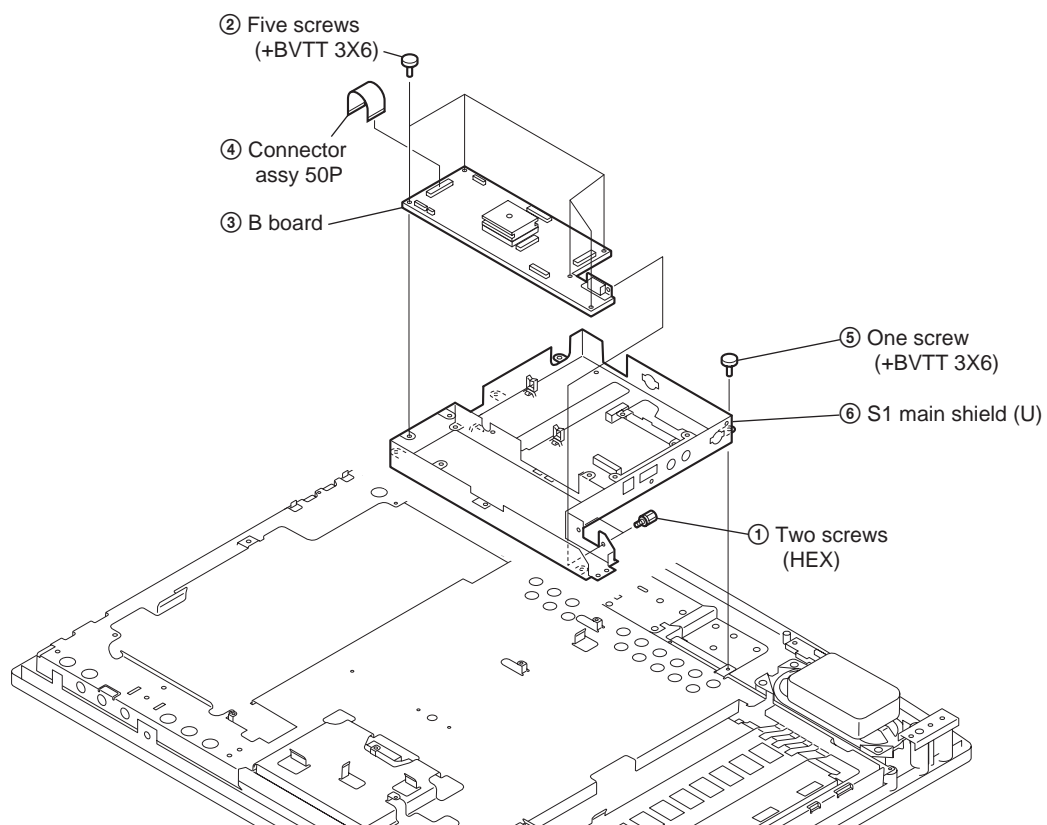


## KLVS23A10

### 2-2-10. H3 BOARD AND SPEAKER REMOVAL

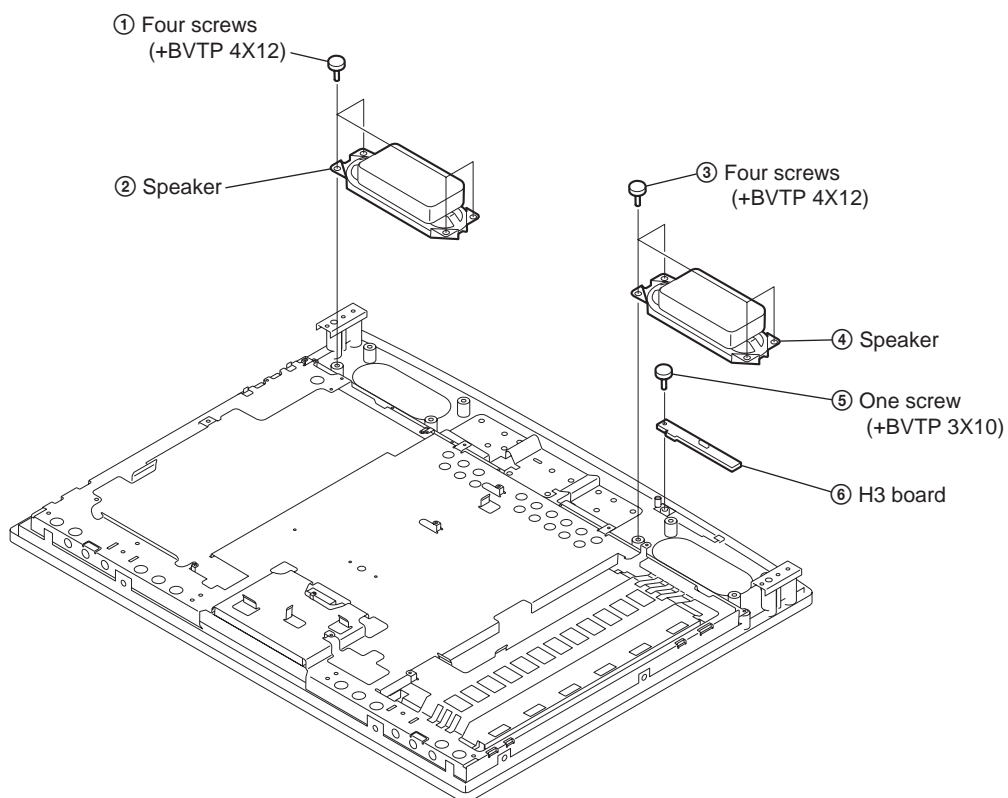

## KLVS23A10

### 2-2-11. LCD PANEL REMOVAL

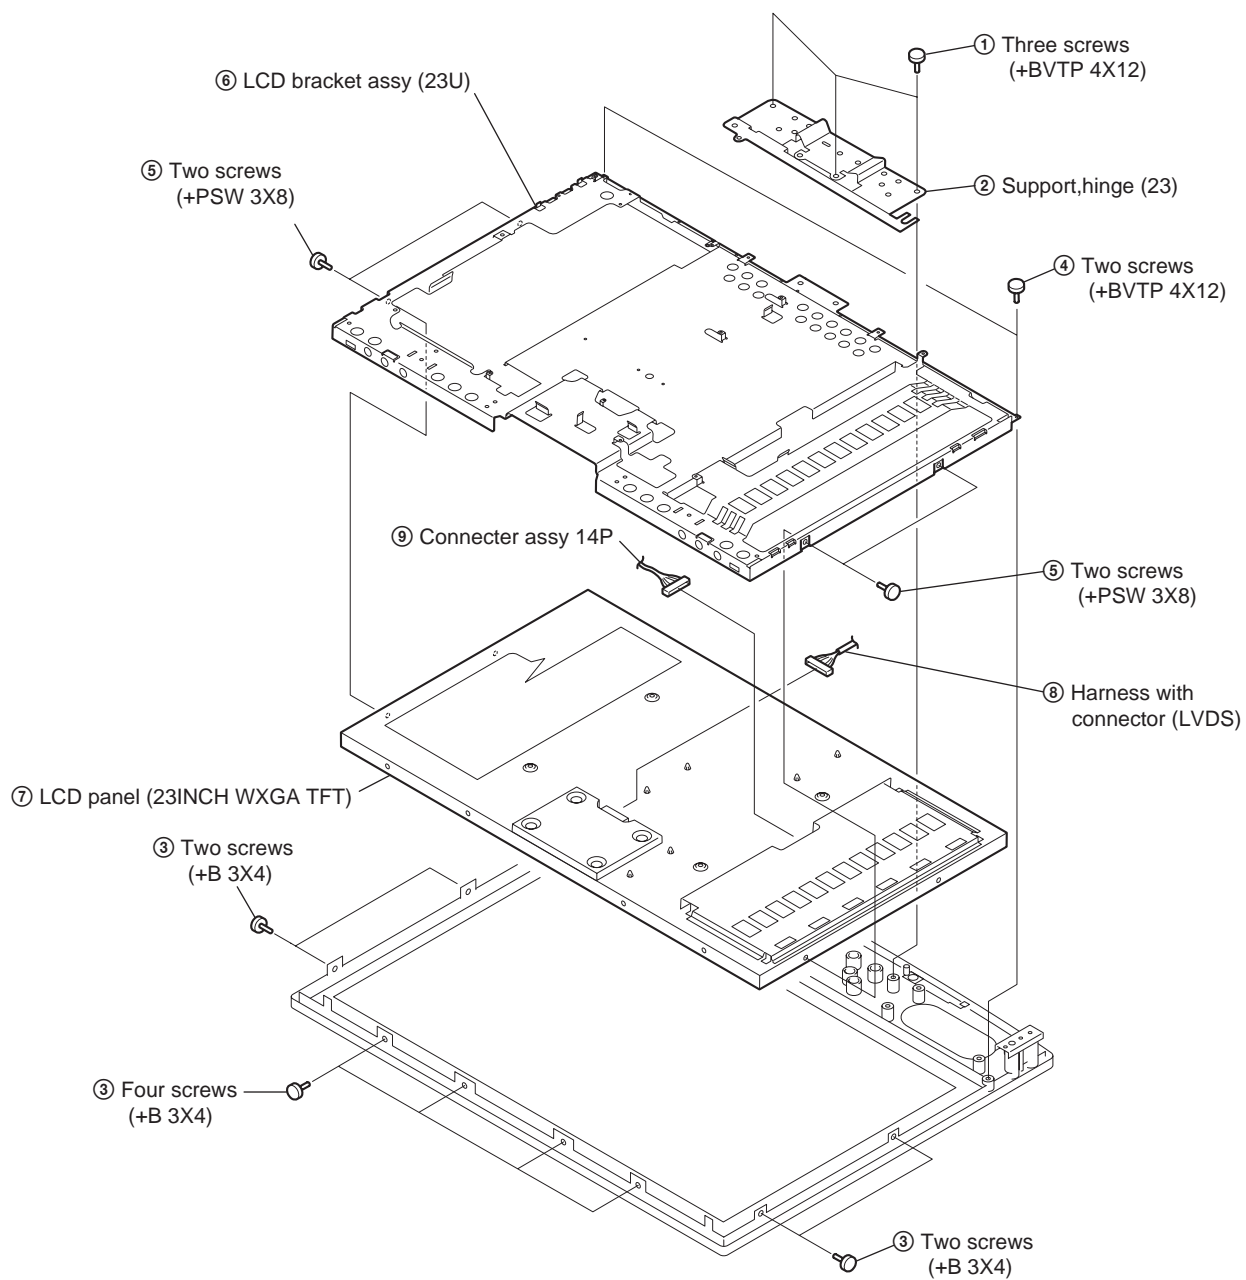

## SECTION 3



### SERVICE MODE

#### 3-1. DISPLAYING SERVICE MENU

- (1) Turn ON the power of the TV set, and drive it into the standby mode by the remote control.
- (2) Press the buttons on the remote control as follows.

Analog service menu	WAX	DISPLAY → TEN KEY “5” → VOL “+” → TV POWER
---------------------	-----	--


#### 3-2. ADJUSTMENT USING THE SERVICE MENU.

Set adjustment values using the “/” keys and the “” key.




SECTION 4  
DIAGRAMS


4-1. BLOCK DIAGRAMS  
(1) A1U (1/2) and TU Boards (KLV-S19A10 Only)

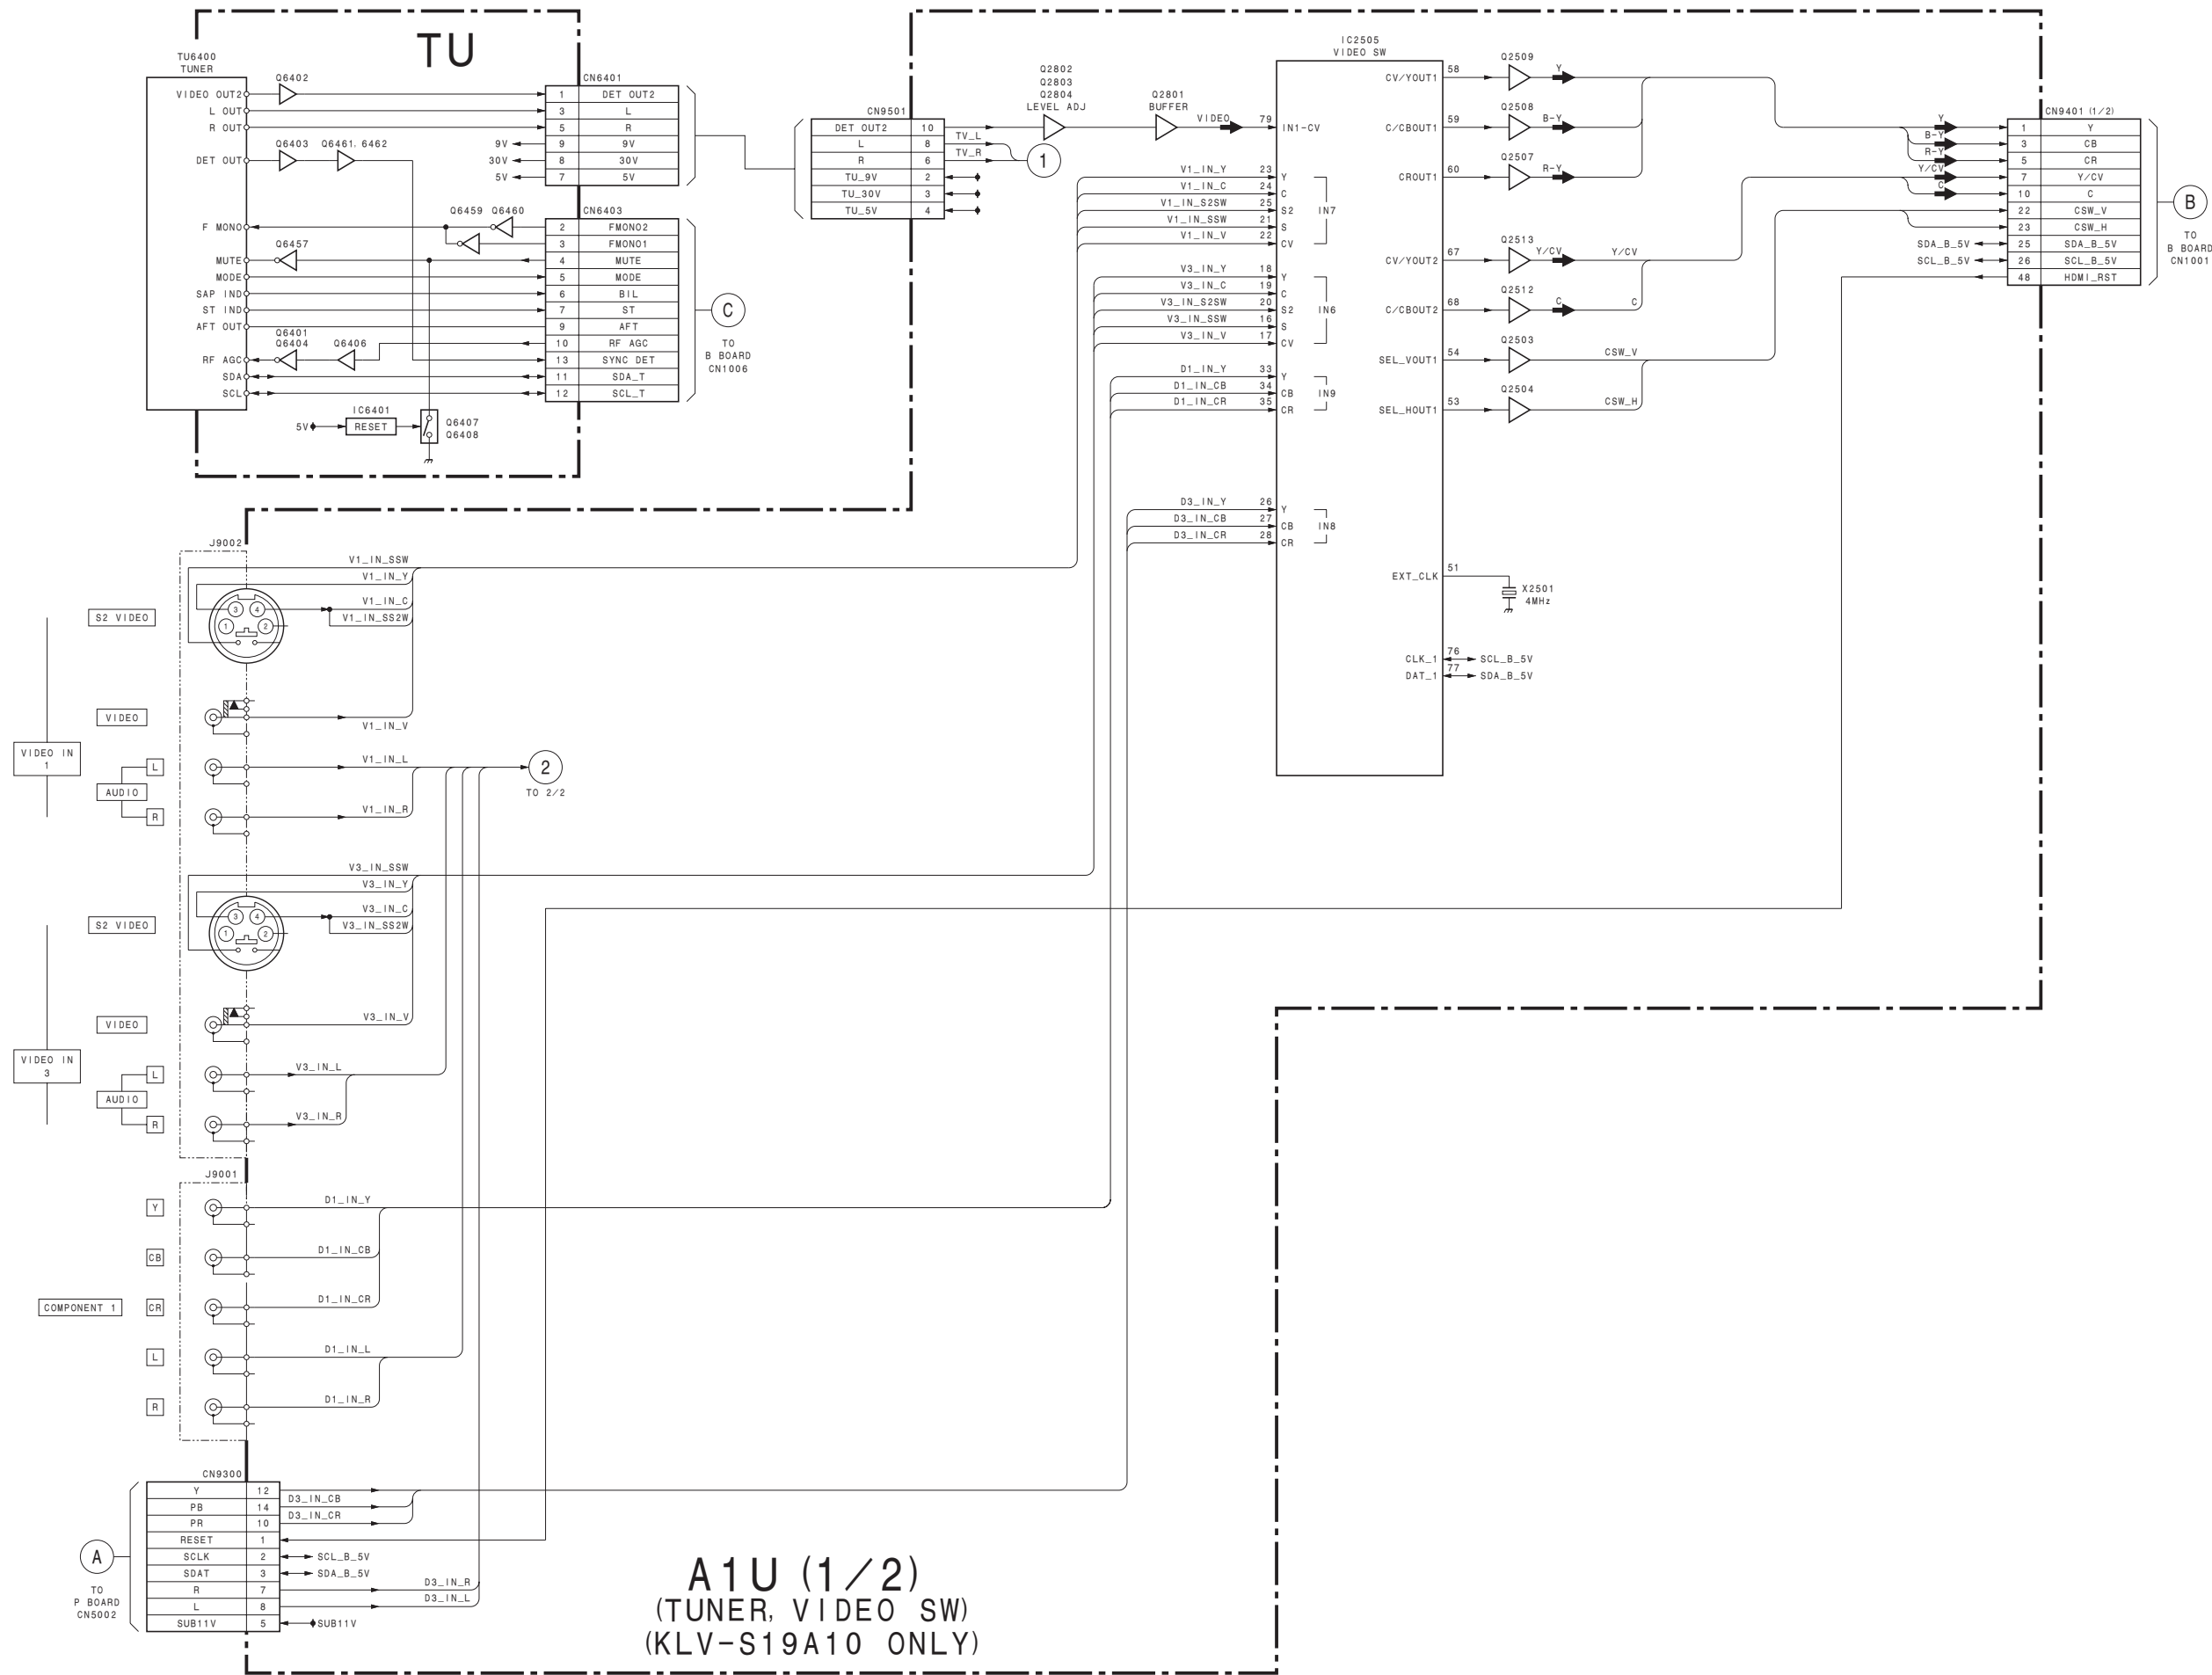


(2) A1U (2/2) Board (KLV-S19A10 Only)

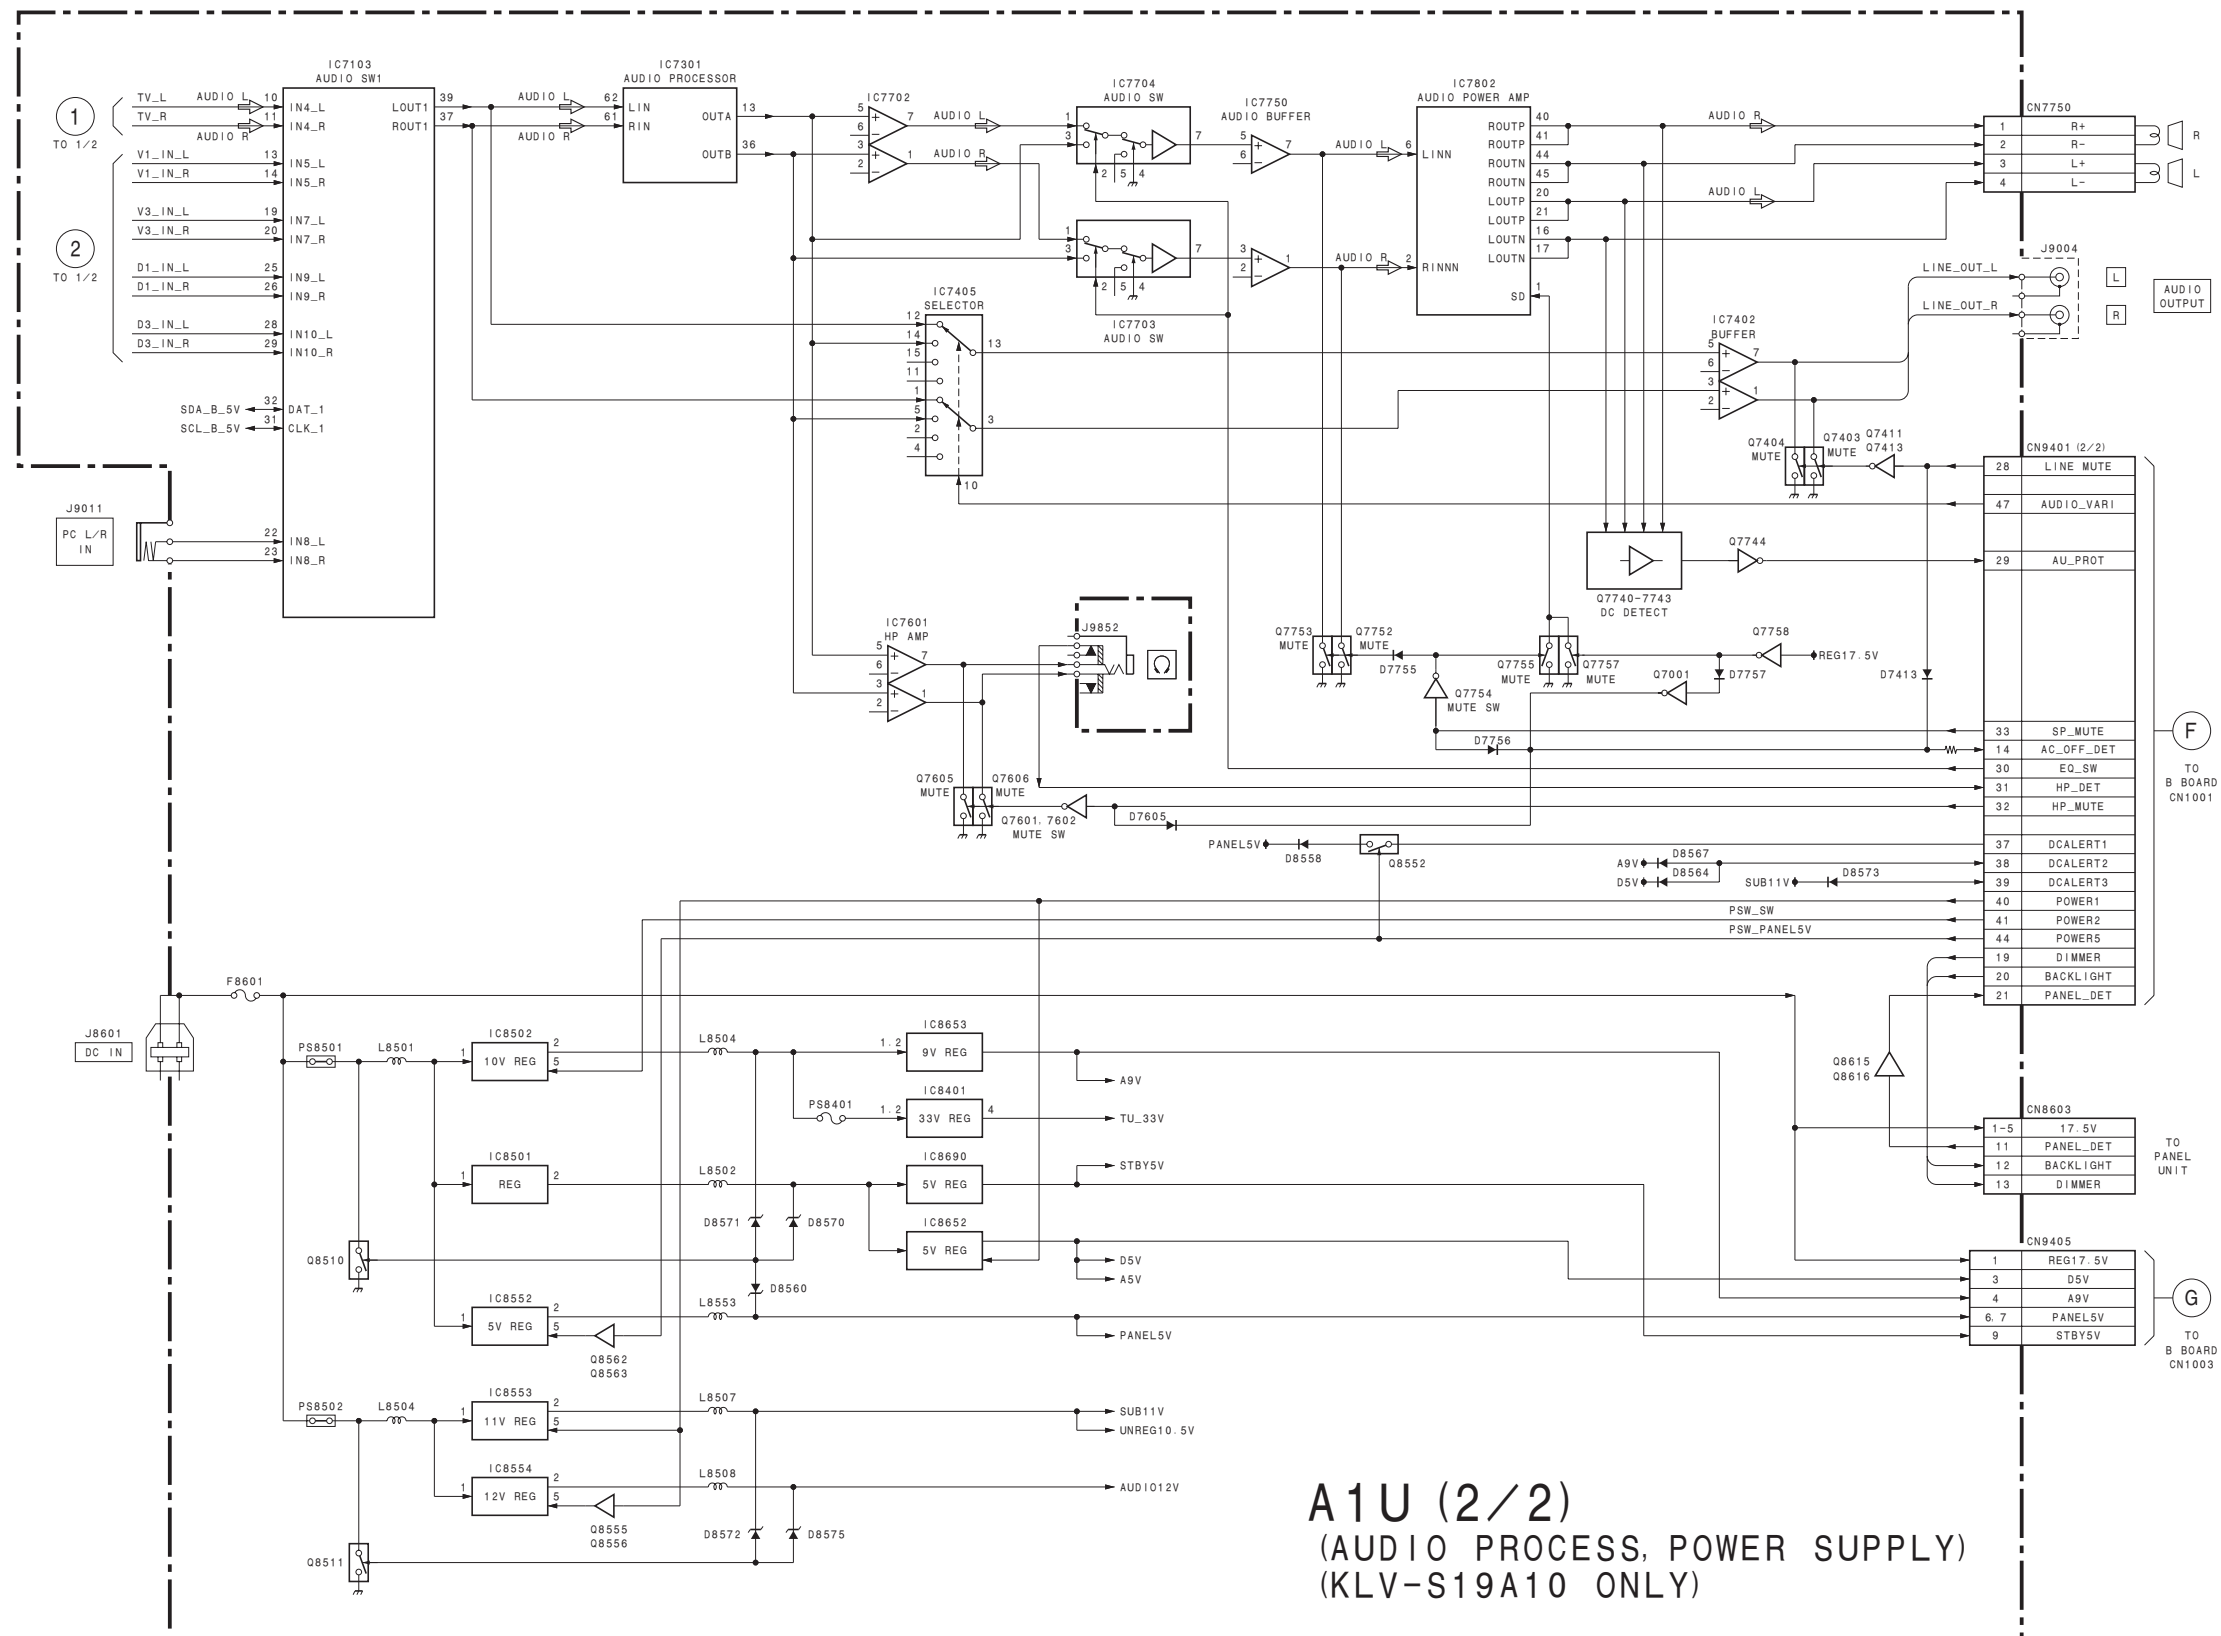

(3) A2U (1/2), TU and H2 Boards (KLV-S23A10 Only)

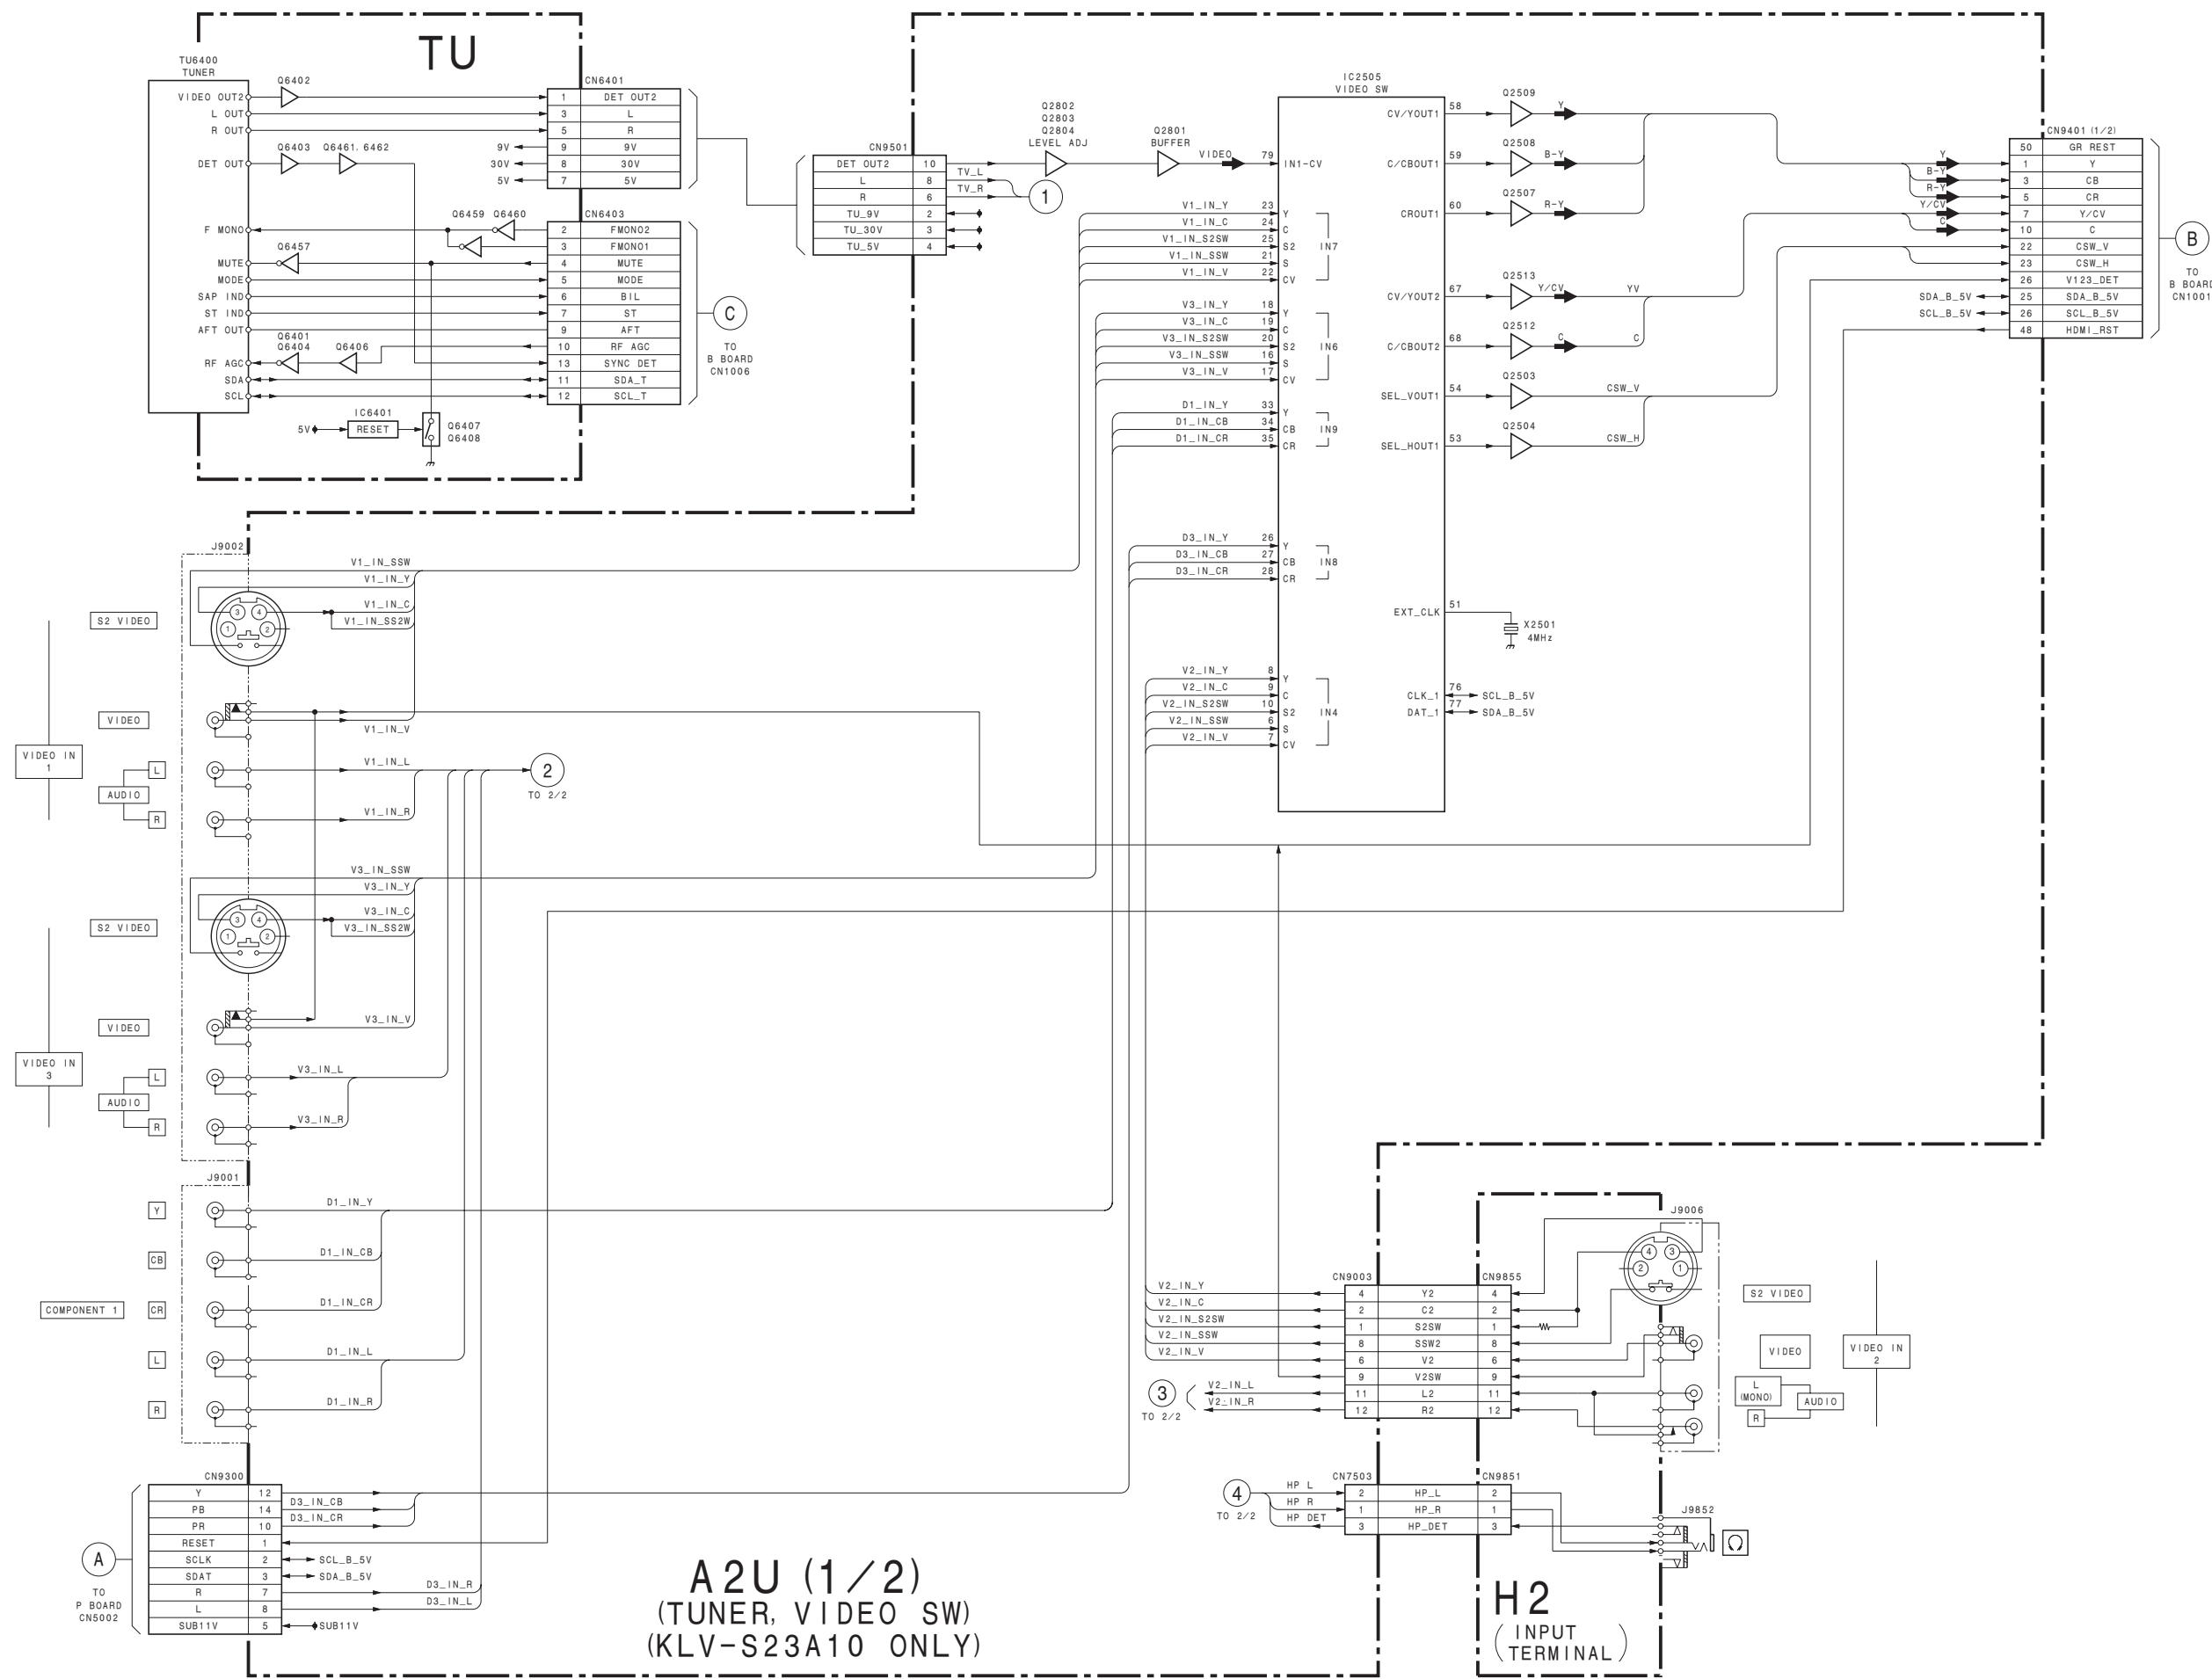


(4) A2U (2/2) Board (KLV-S23A10 Only)

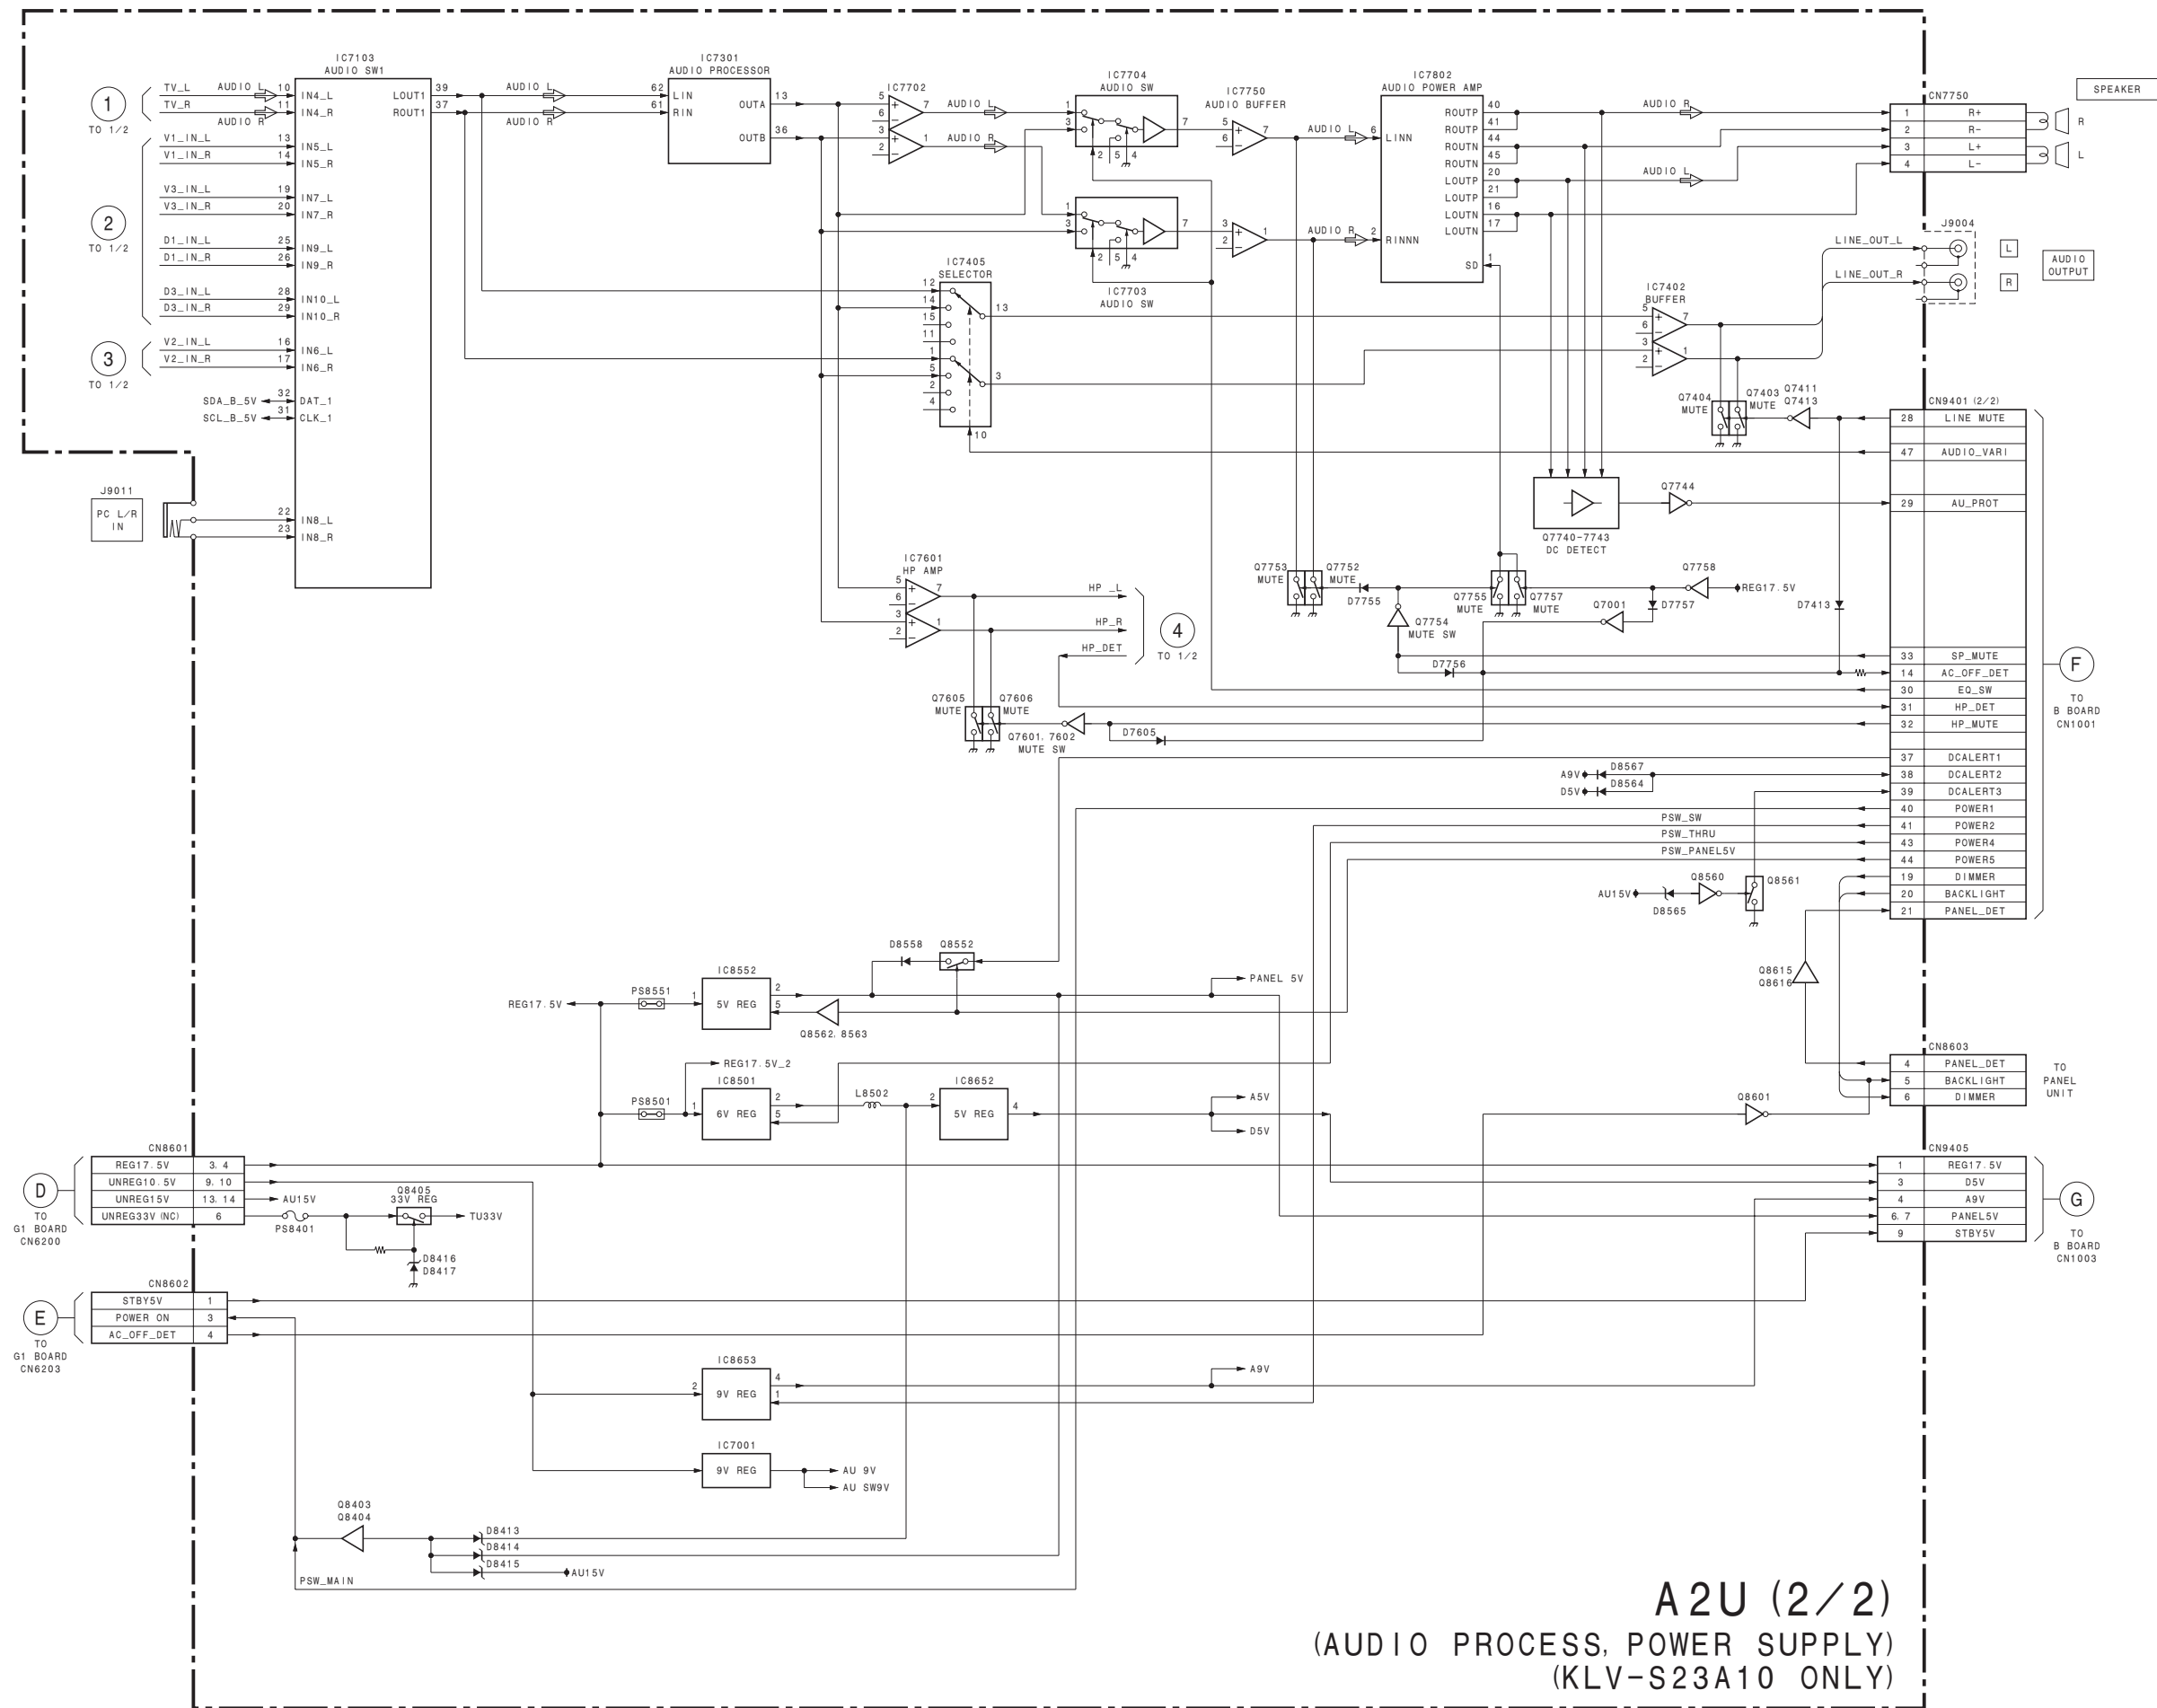


A2U (2/2)  
(AUDIO PROCESS, POWER SUPPLY)  
(KLV-S23A10 ONLY)


### (5) B, H1 and H3 Boards

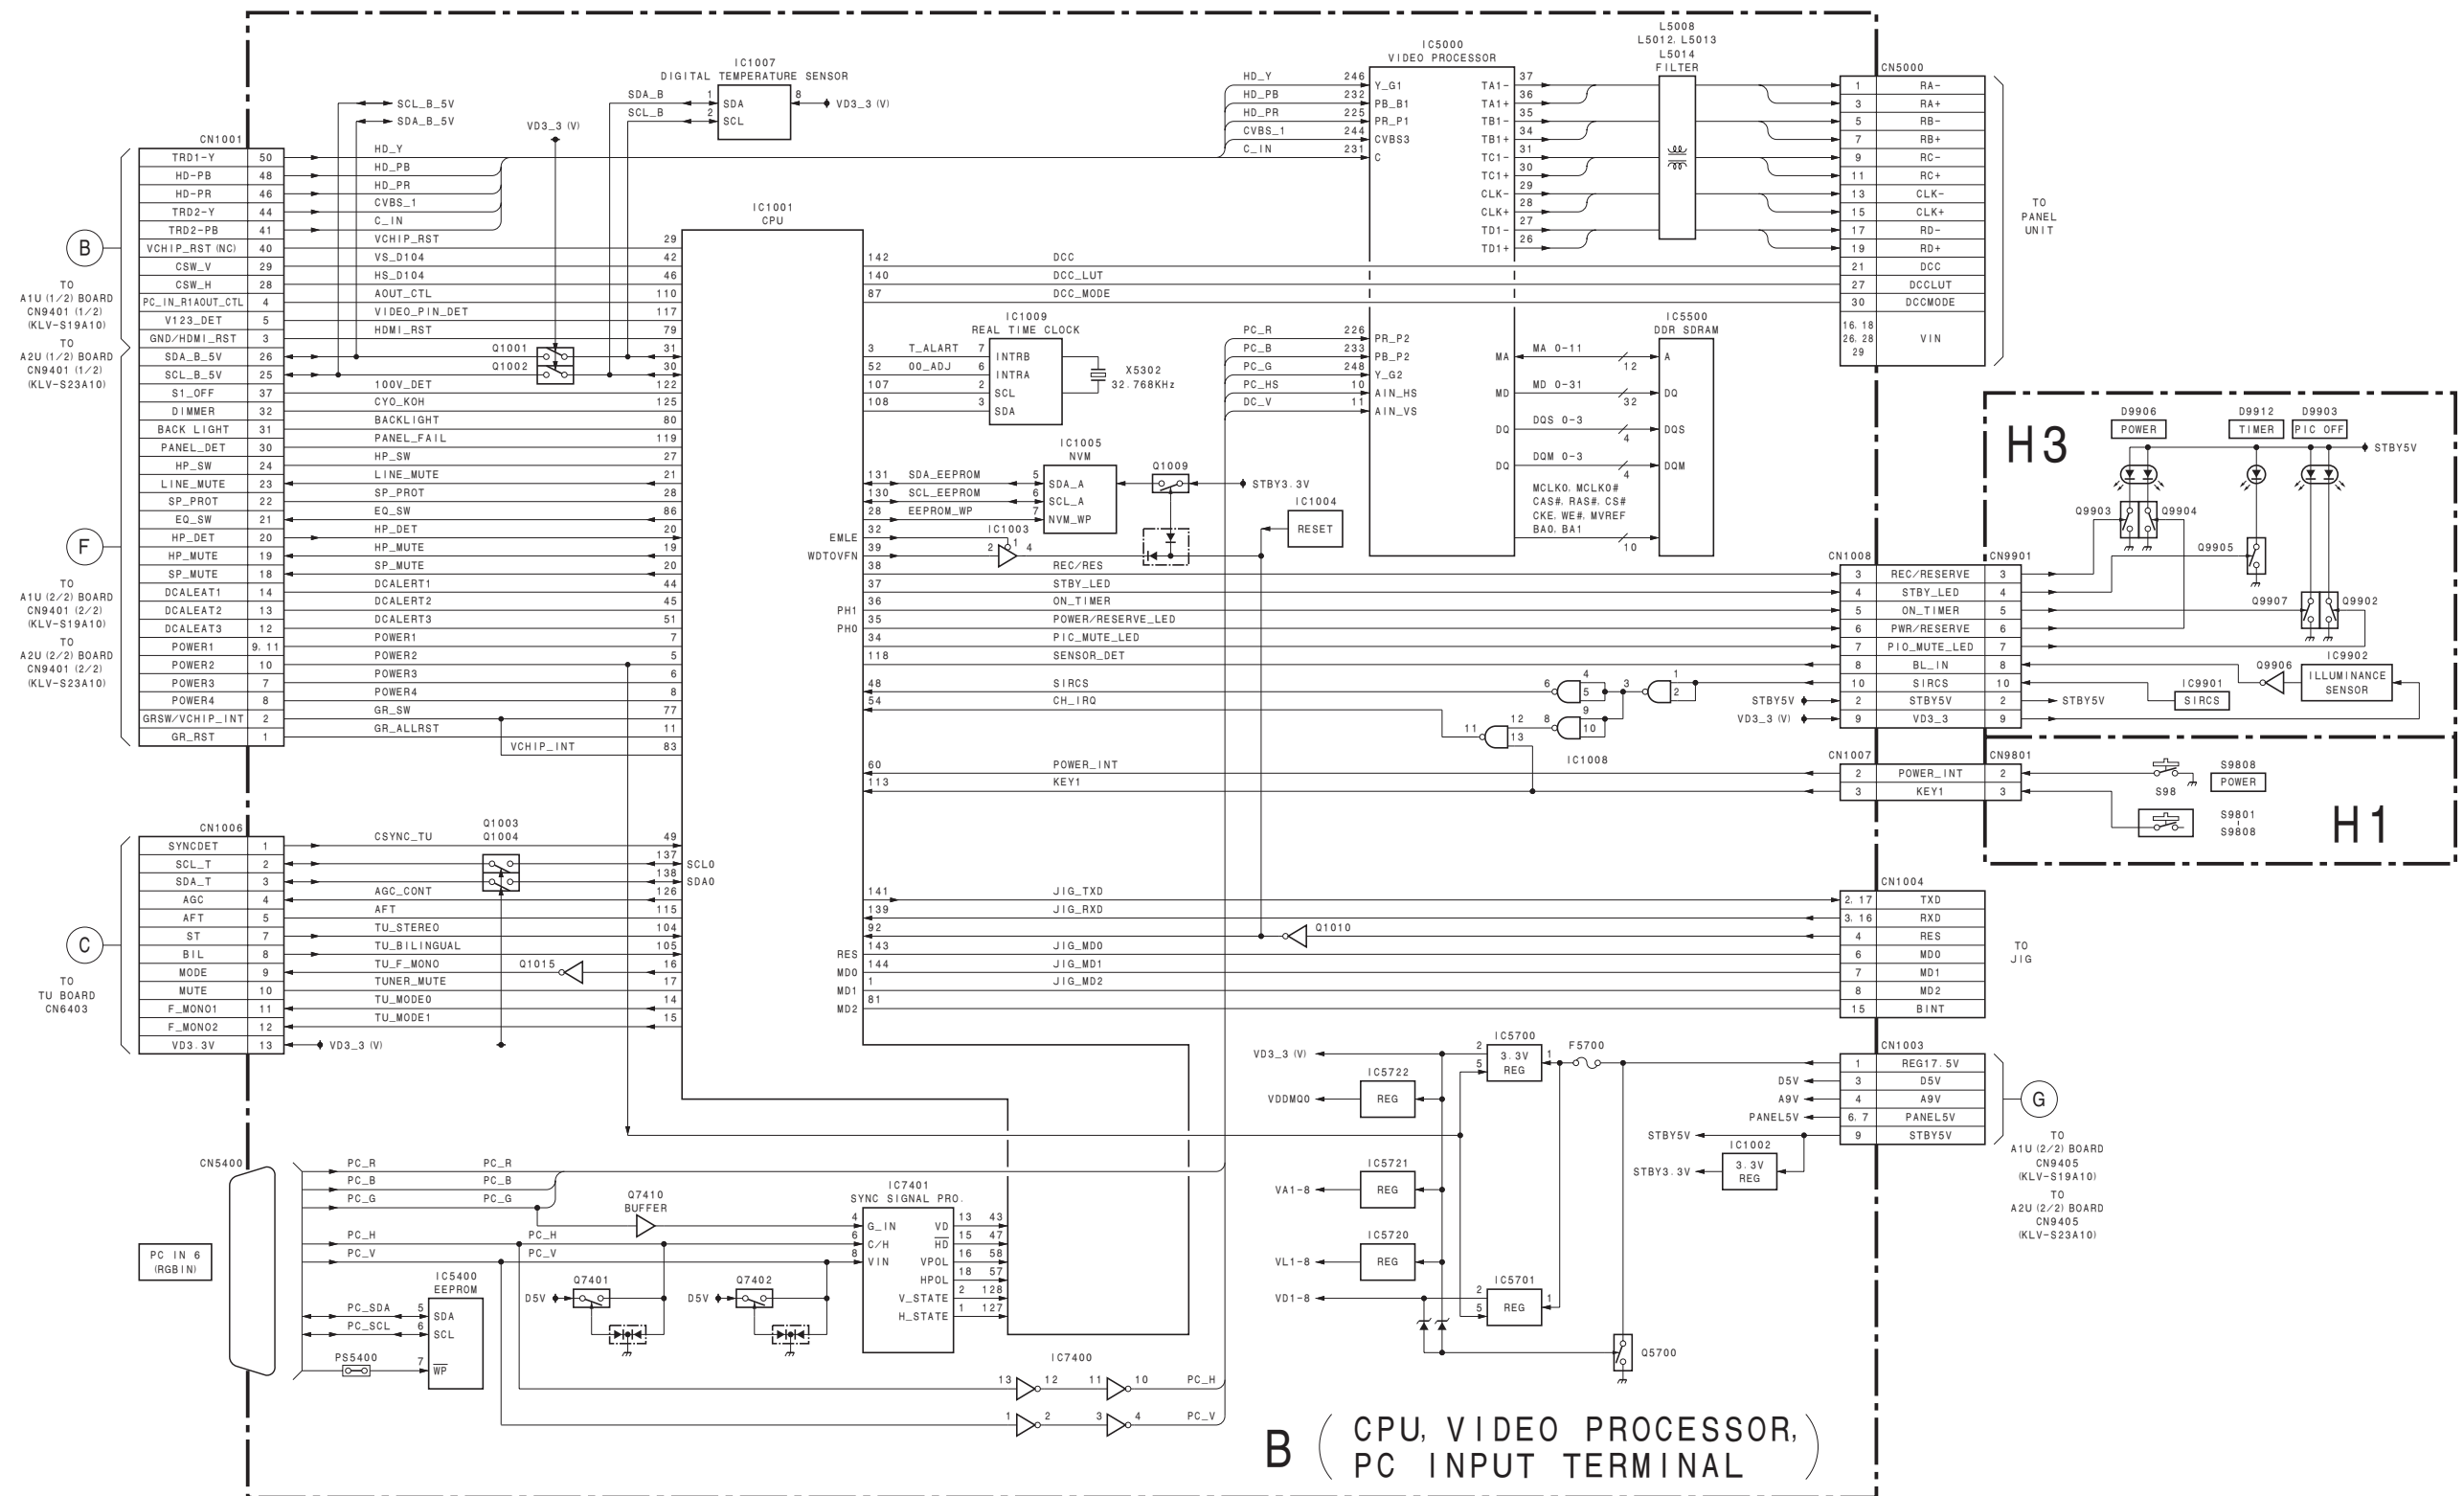


**(6) G1 Board (KLV-S23A10 Only)**

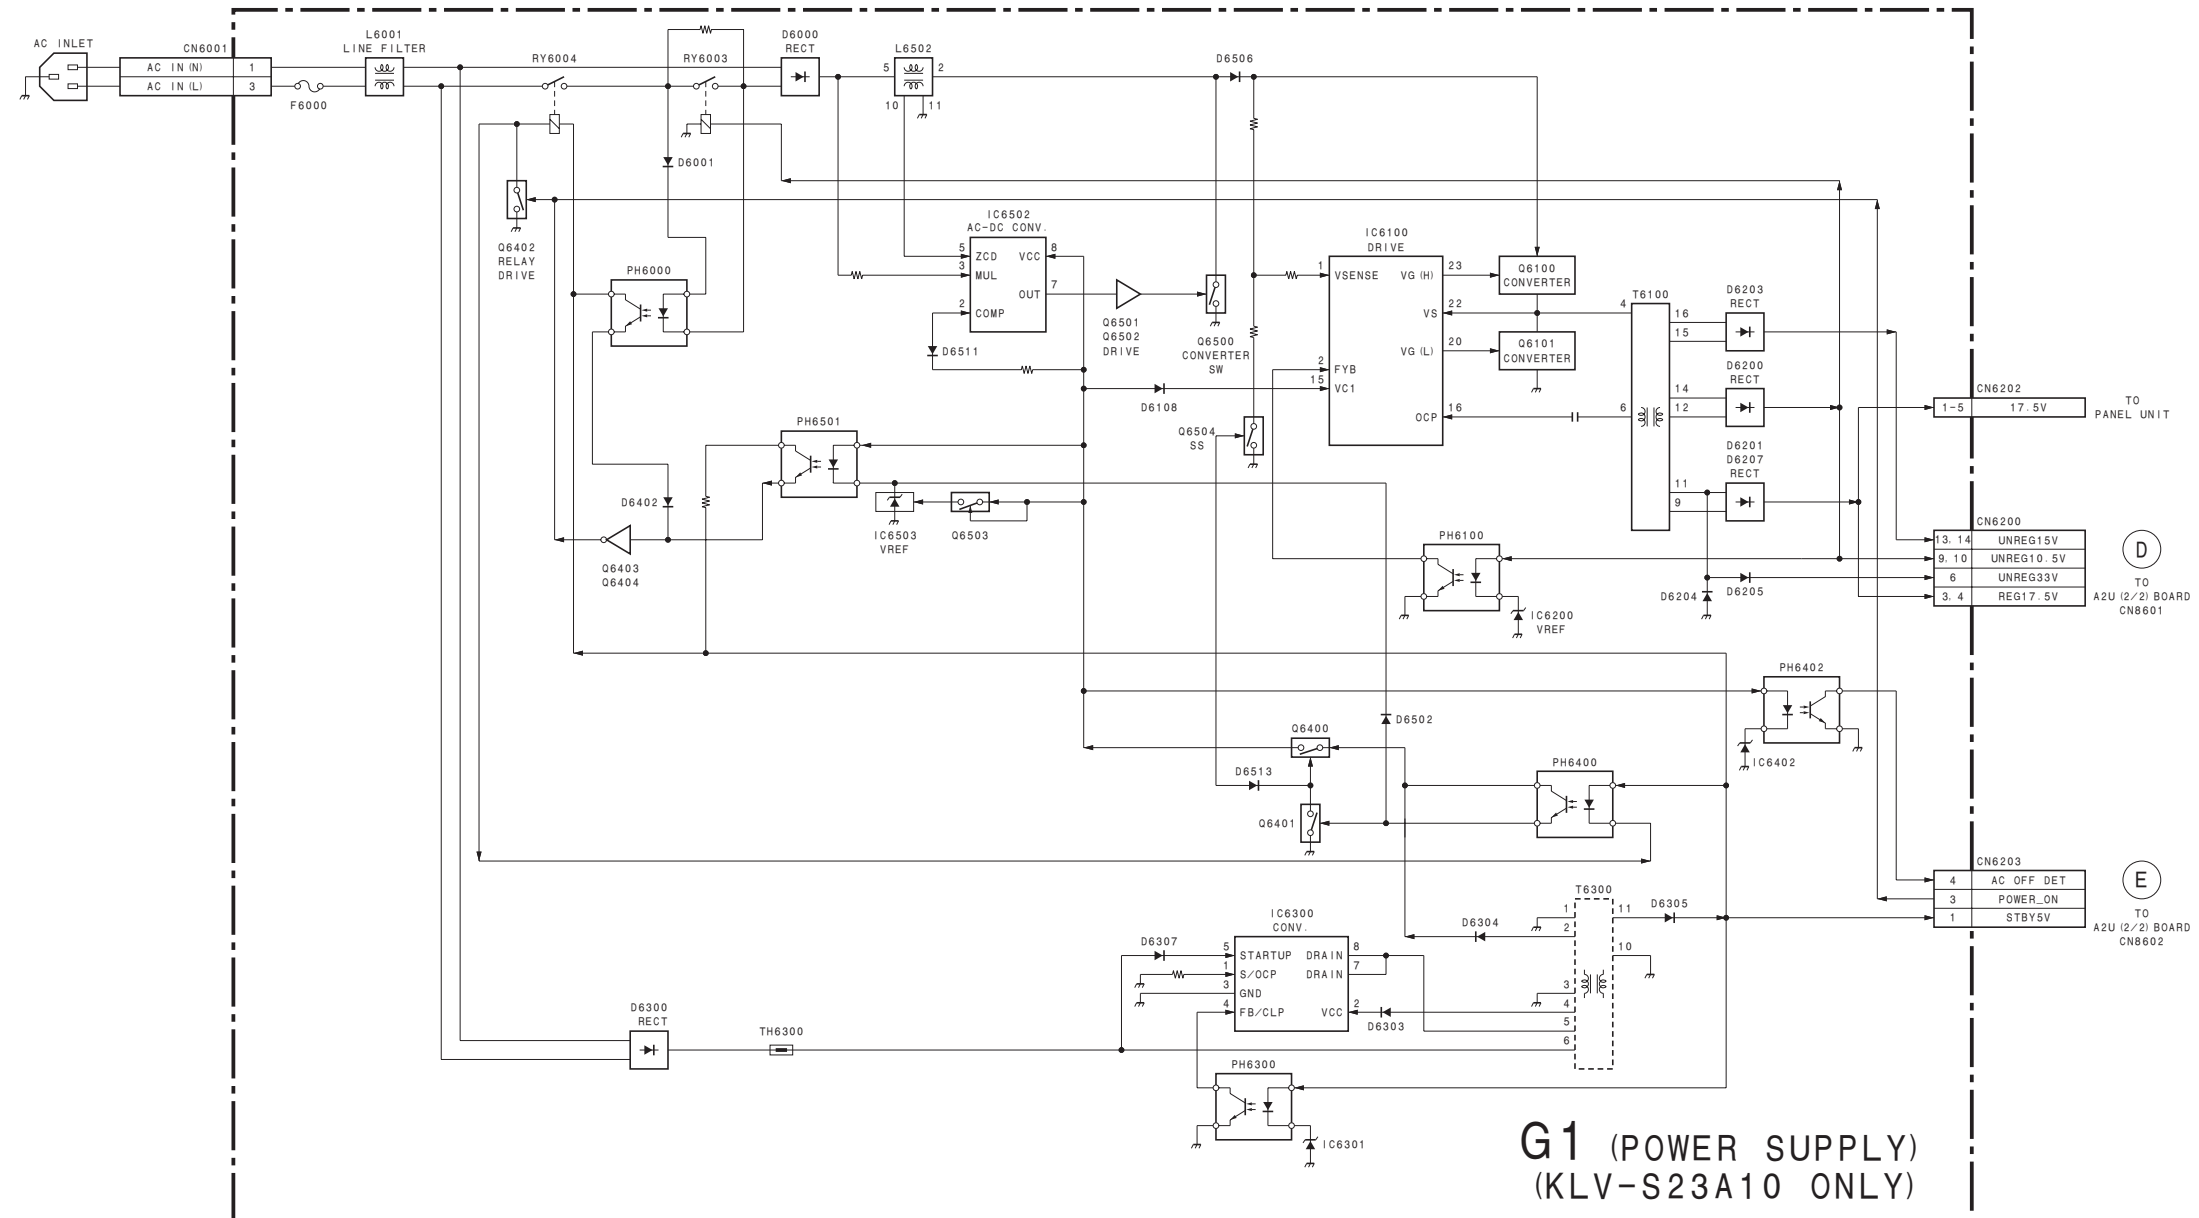


**(7) P Board**

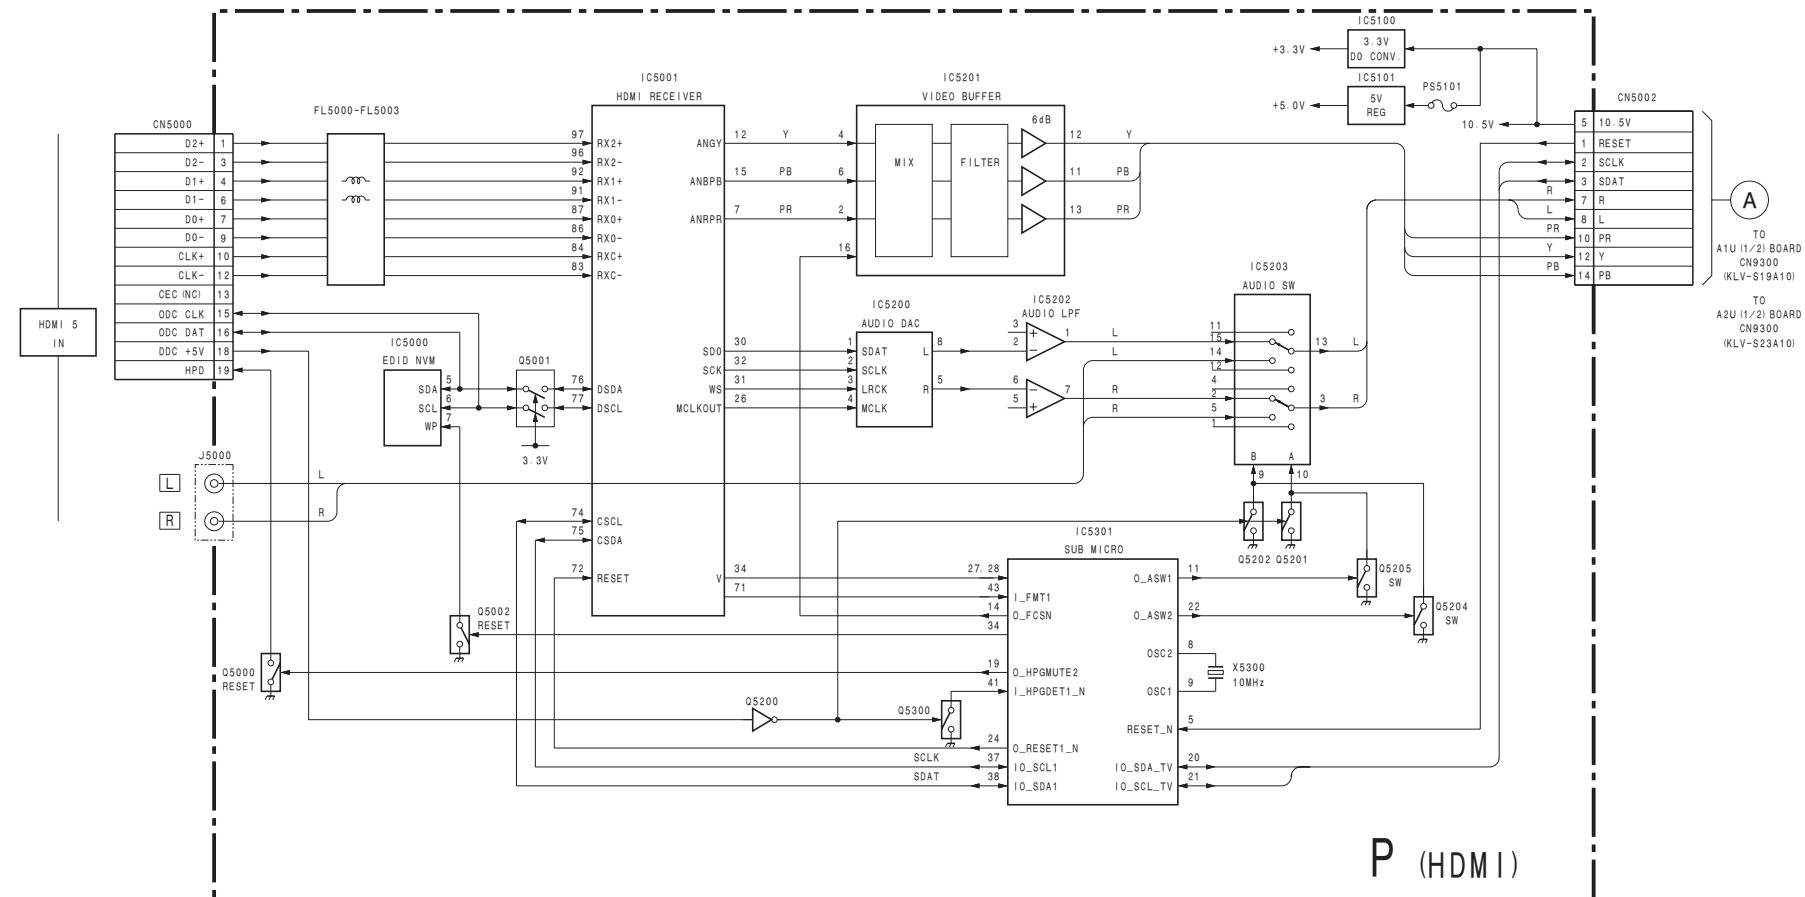

#### 4-2-1. KLV-S19A10






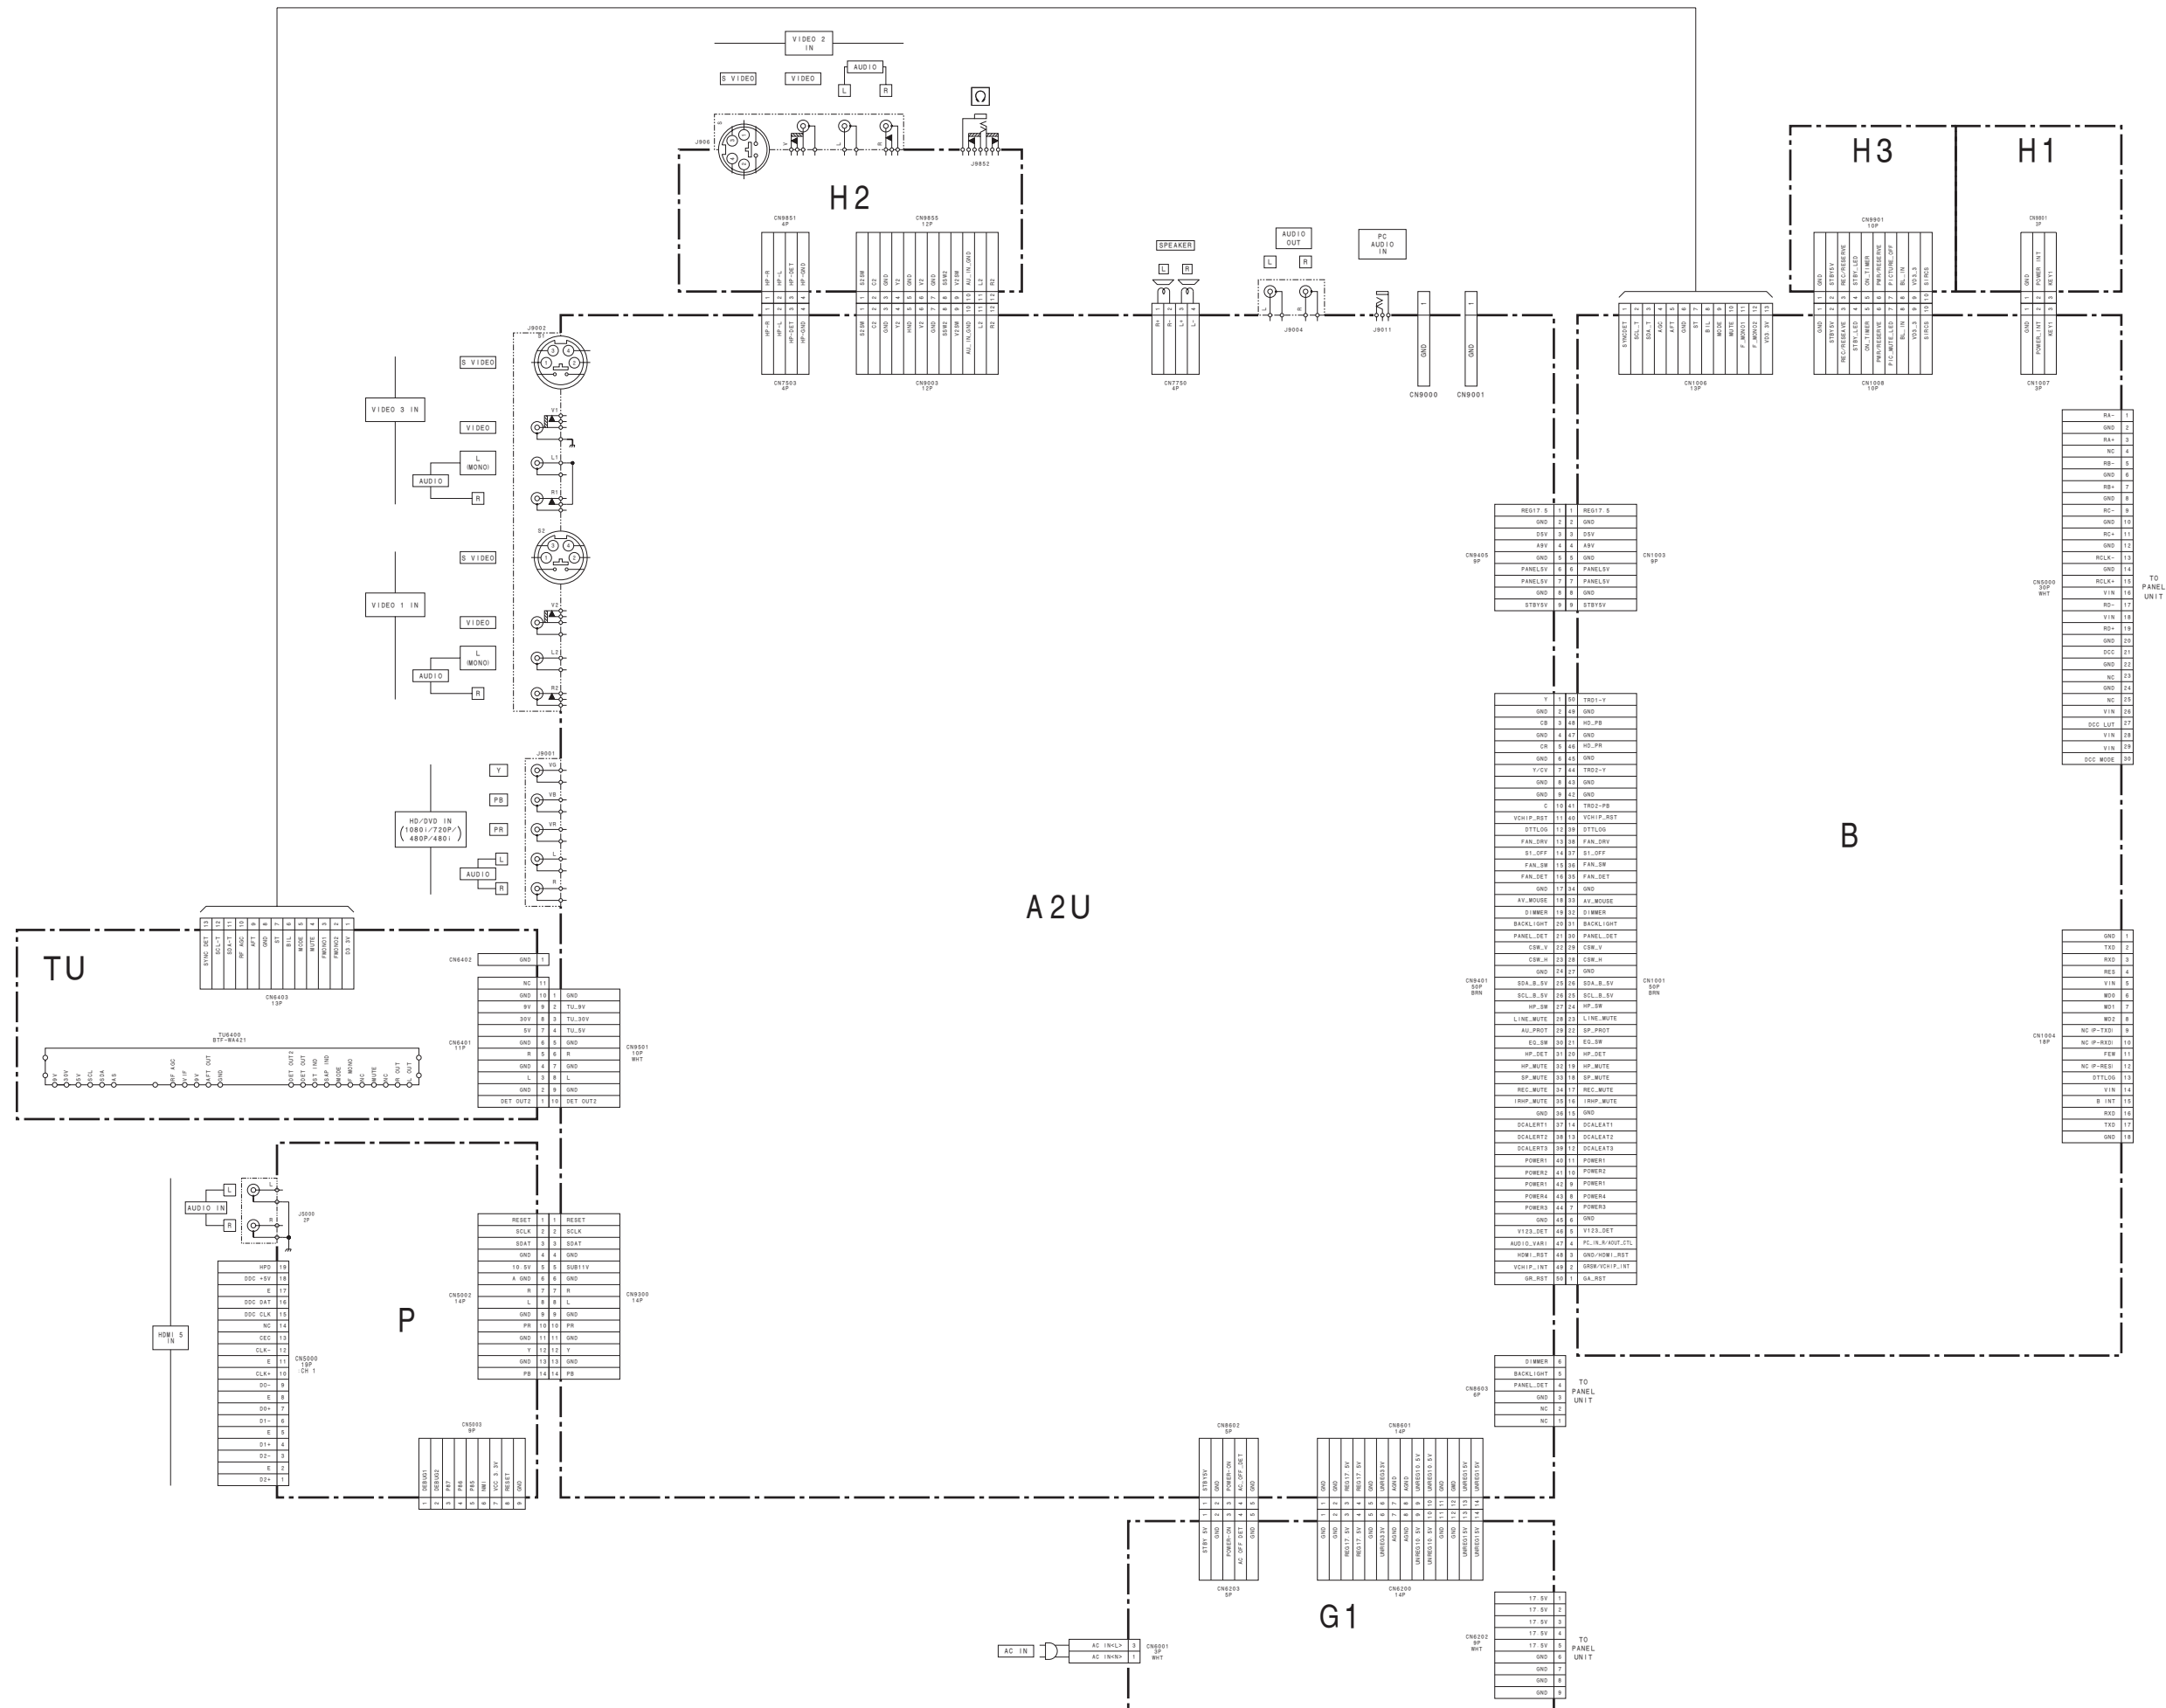


4-3. CIRCUIT BOARDS LOCATION

4-3-1. KLV-S19A10

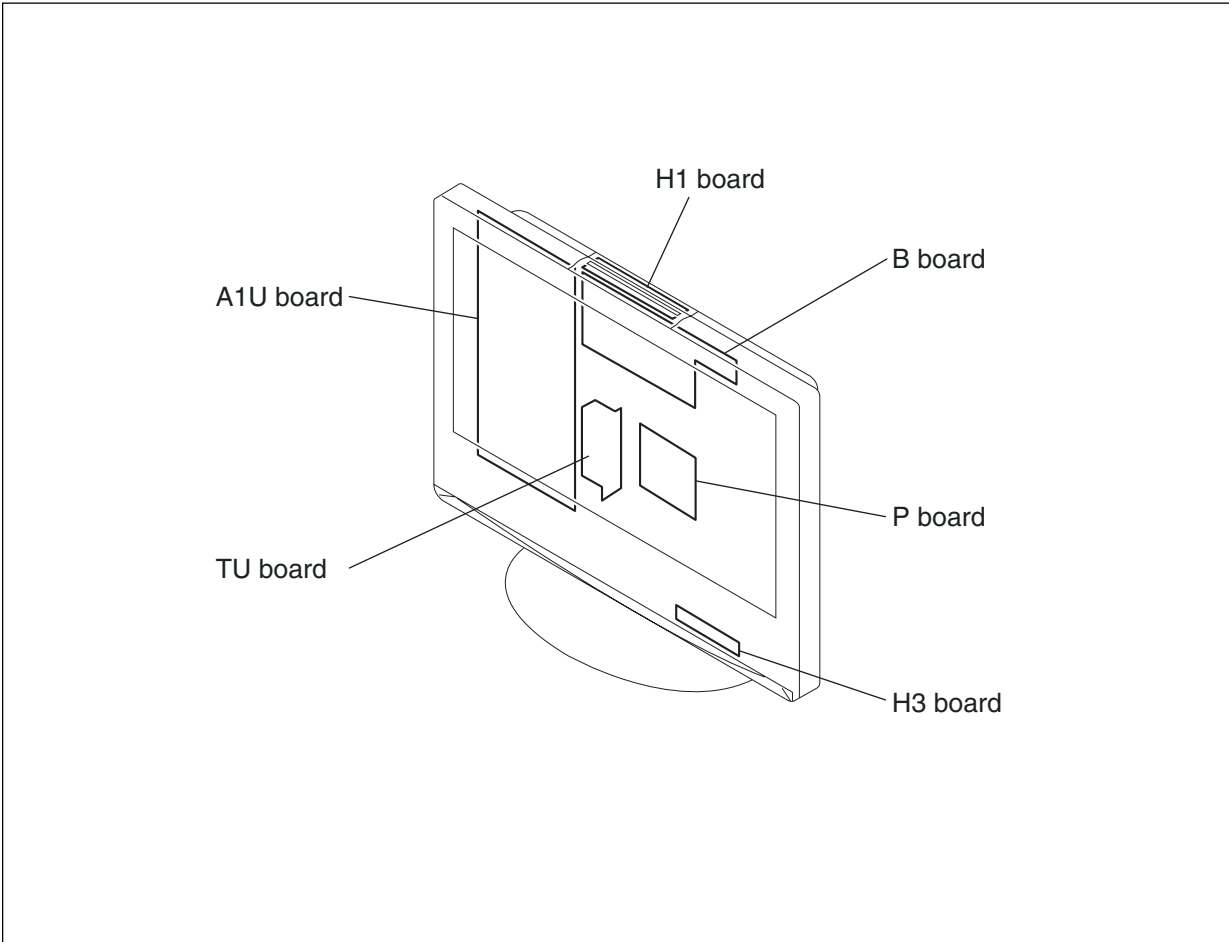

4-3-2. KLV-S23A10

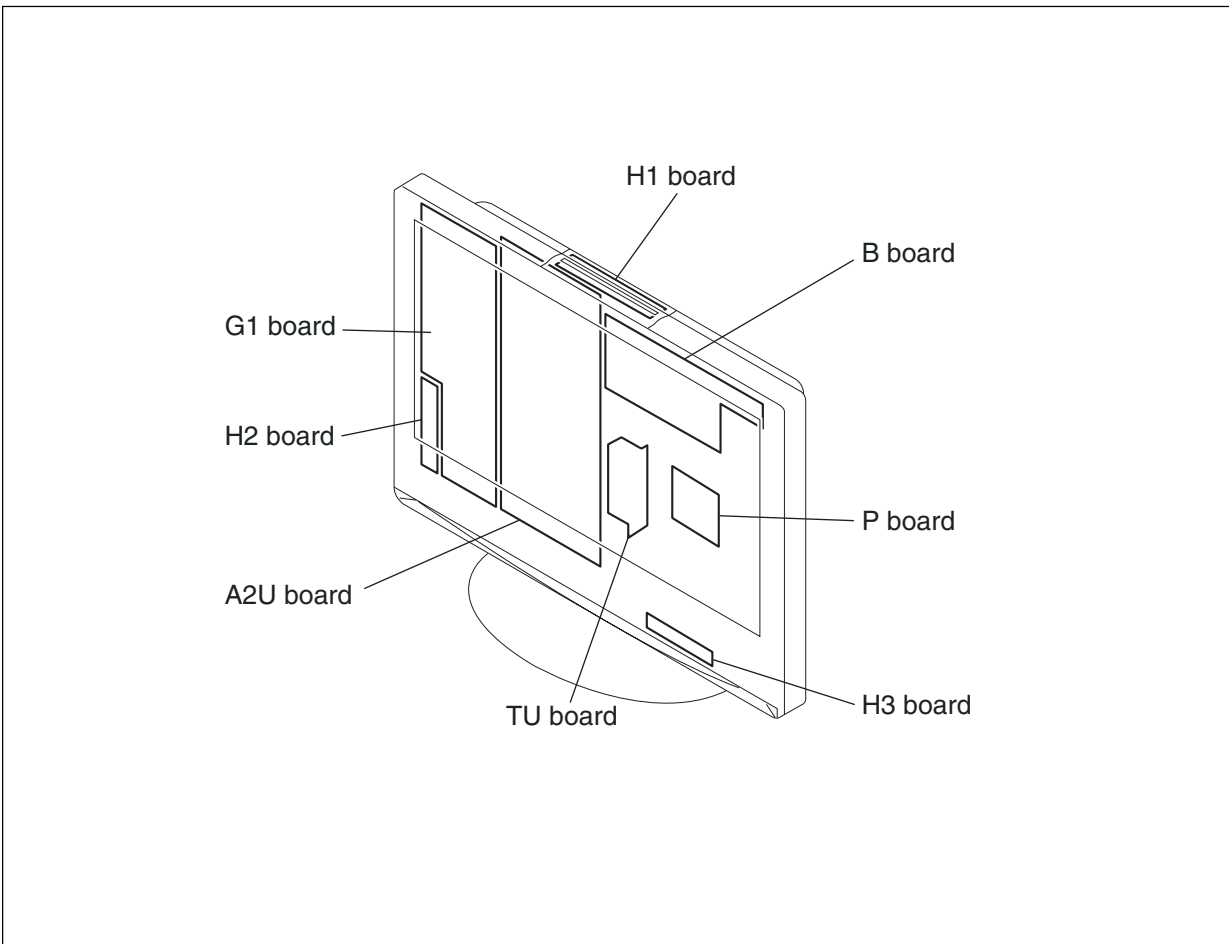

4-4. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

- Note:**
- Schematic diagrams and printed wiring boards of the specified boards for board replacement service are not included in this section. See Appendix of this manual if you need them.
  - All capacitors are in  $\mu\text{F}$  unless otherwise noted. ( $\text{pF}$ :  $\mu\mu\text{F}$ ) Capacitors without voltage indication are all 50 V.
  - Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm  
Rating electrical power 1/4 W (CHIP : 1/10 W)

- All resistors are in ohms.
- : nonflammable resistor.
- : fusible resistor.
- : internal component.
- : panel designation, and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- : earth-ground.
- : earth-chassis.
- When replacing the part in below table, be sure to perform the related adjustment.
- All voltages are in V.
- Readings are taken with a 10 M $\Omega$  digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerances.
- \* : Names and values of parts depend on models.
- \* : Can not be measured.
- Circled numbers are waveform references.
- : B + bus.
- : B – bus.
- : Signal path.

**Note:** The components identified by shading and mark are critical for safety. Replace only with part number specified.


**Note:** Les composants identifiés par un tramé et une marque sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

Terminal name of semiconductors in silk screen printed circuit (※)


	Device	Printed symbol	Terminal name	Circuit
①	Transistor		Collector Base Emitter	
②	Transistor		Collector Base Emitter	
③	Diode		Cathode Anode	
④	Diode		Cathode Anode (NC)	
⑤	Diode		Cathode Anode (NC)	
⑥	Diode		Common Anode Cathode	
⑦	Diode		Common Anode Cathode	
⑧	Diode		Common Anode Anode	
⑨	Diode		Common Anode Anode	
⑩	Diode		Common Cathode Cathode	
⑪	Diode		Common Cathode Cathode	
⑫	Diode		Anode Anode Cathode Anode	
⑬	Transistor (FET)		Drain Source Gate	
⑭	Transistor (FET)		Drain Source Gate	
⑮	Transistor (FET)		Source Drain Gate	
⑯	Transistor		Emitter Collector Base	
⑰	Transistor		C2/B1/E1 E2/B2/C1	
⑱	Transistor		C1/B2/E2 E1/B1/C2	
⑲	Transistor		C1 B2 E2 E1 B1 C2	
⑳	Transistor		C1 B2 E2 E1 B1 C2	
㉑	Transistor		E2 B1 E1 C2 C1(B2)	
㉒	Transistor		(B2) B1 E1 E2 C1 C2	
㉓	Transistor		(B2) E2 E1 B1 C2 C1	
—	Discrete semiconductot			


(Chip semiconductors that are not actually used are included.) Ver.1.6


(1) Schematic Diagrams of A1U Board (KLV-S19A10 Only)

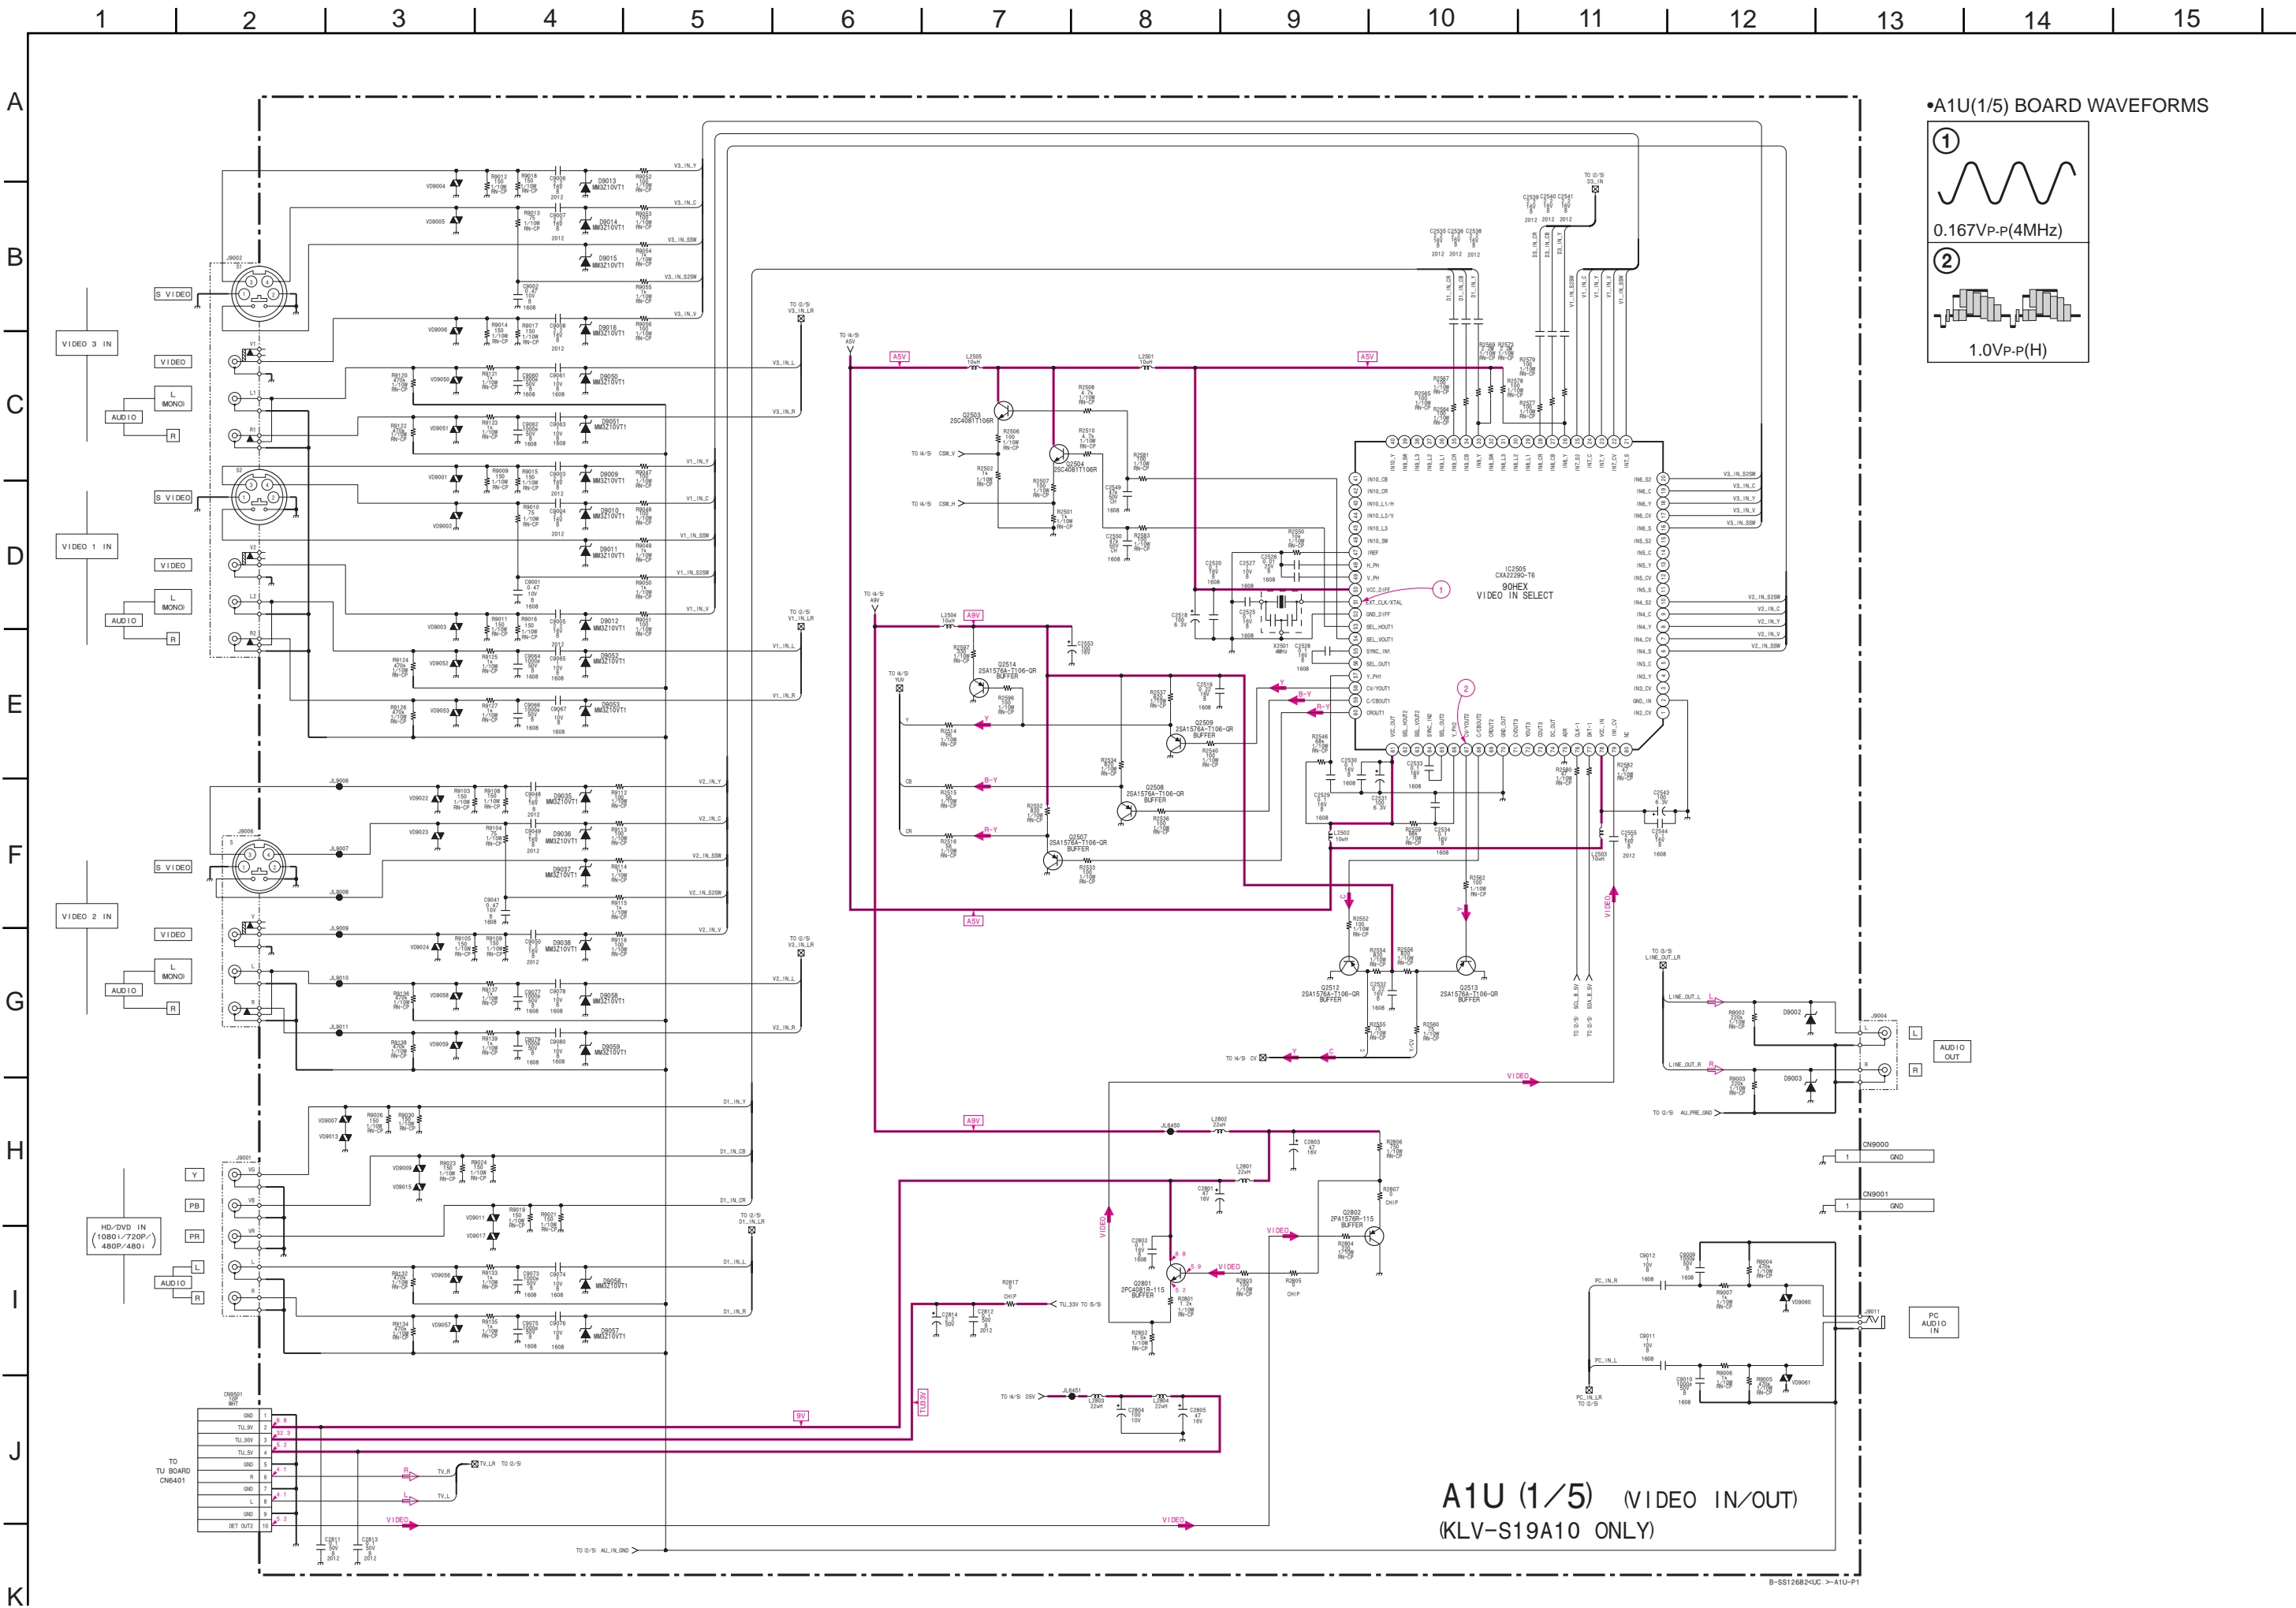

•A1U(1/5) BOARD WAVEFORMS






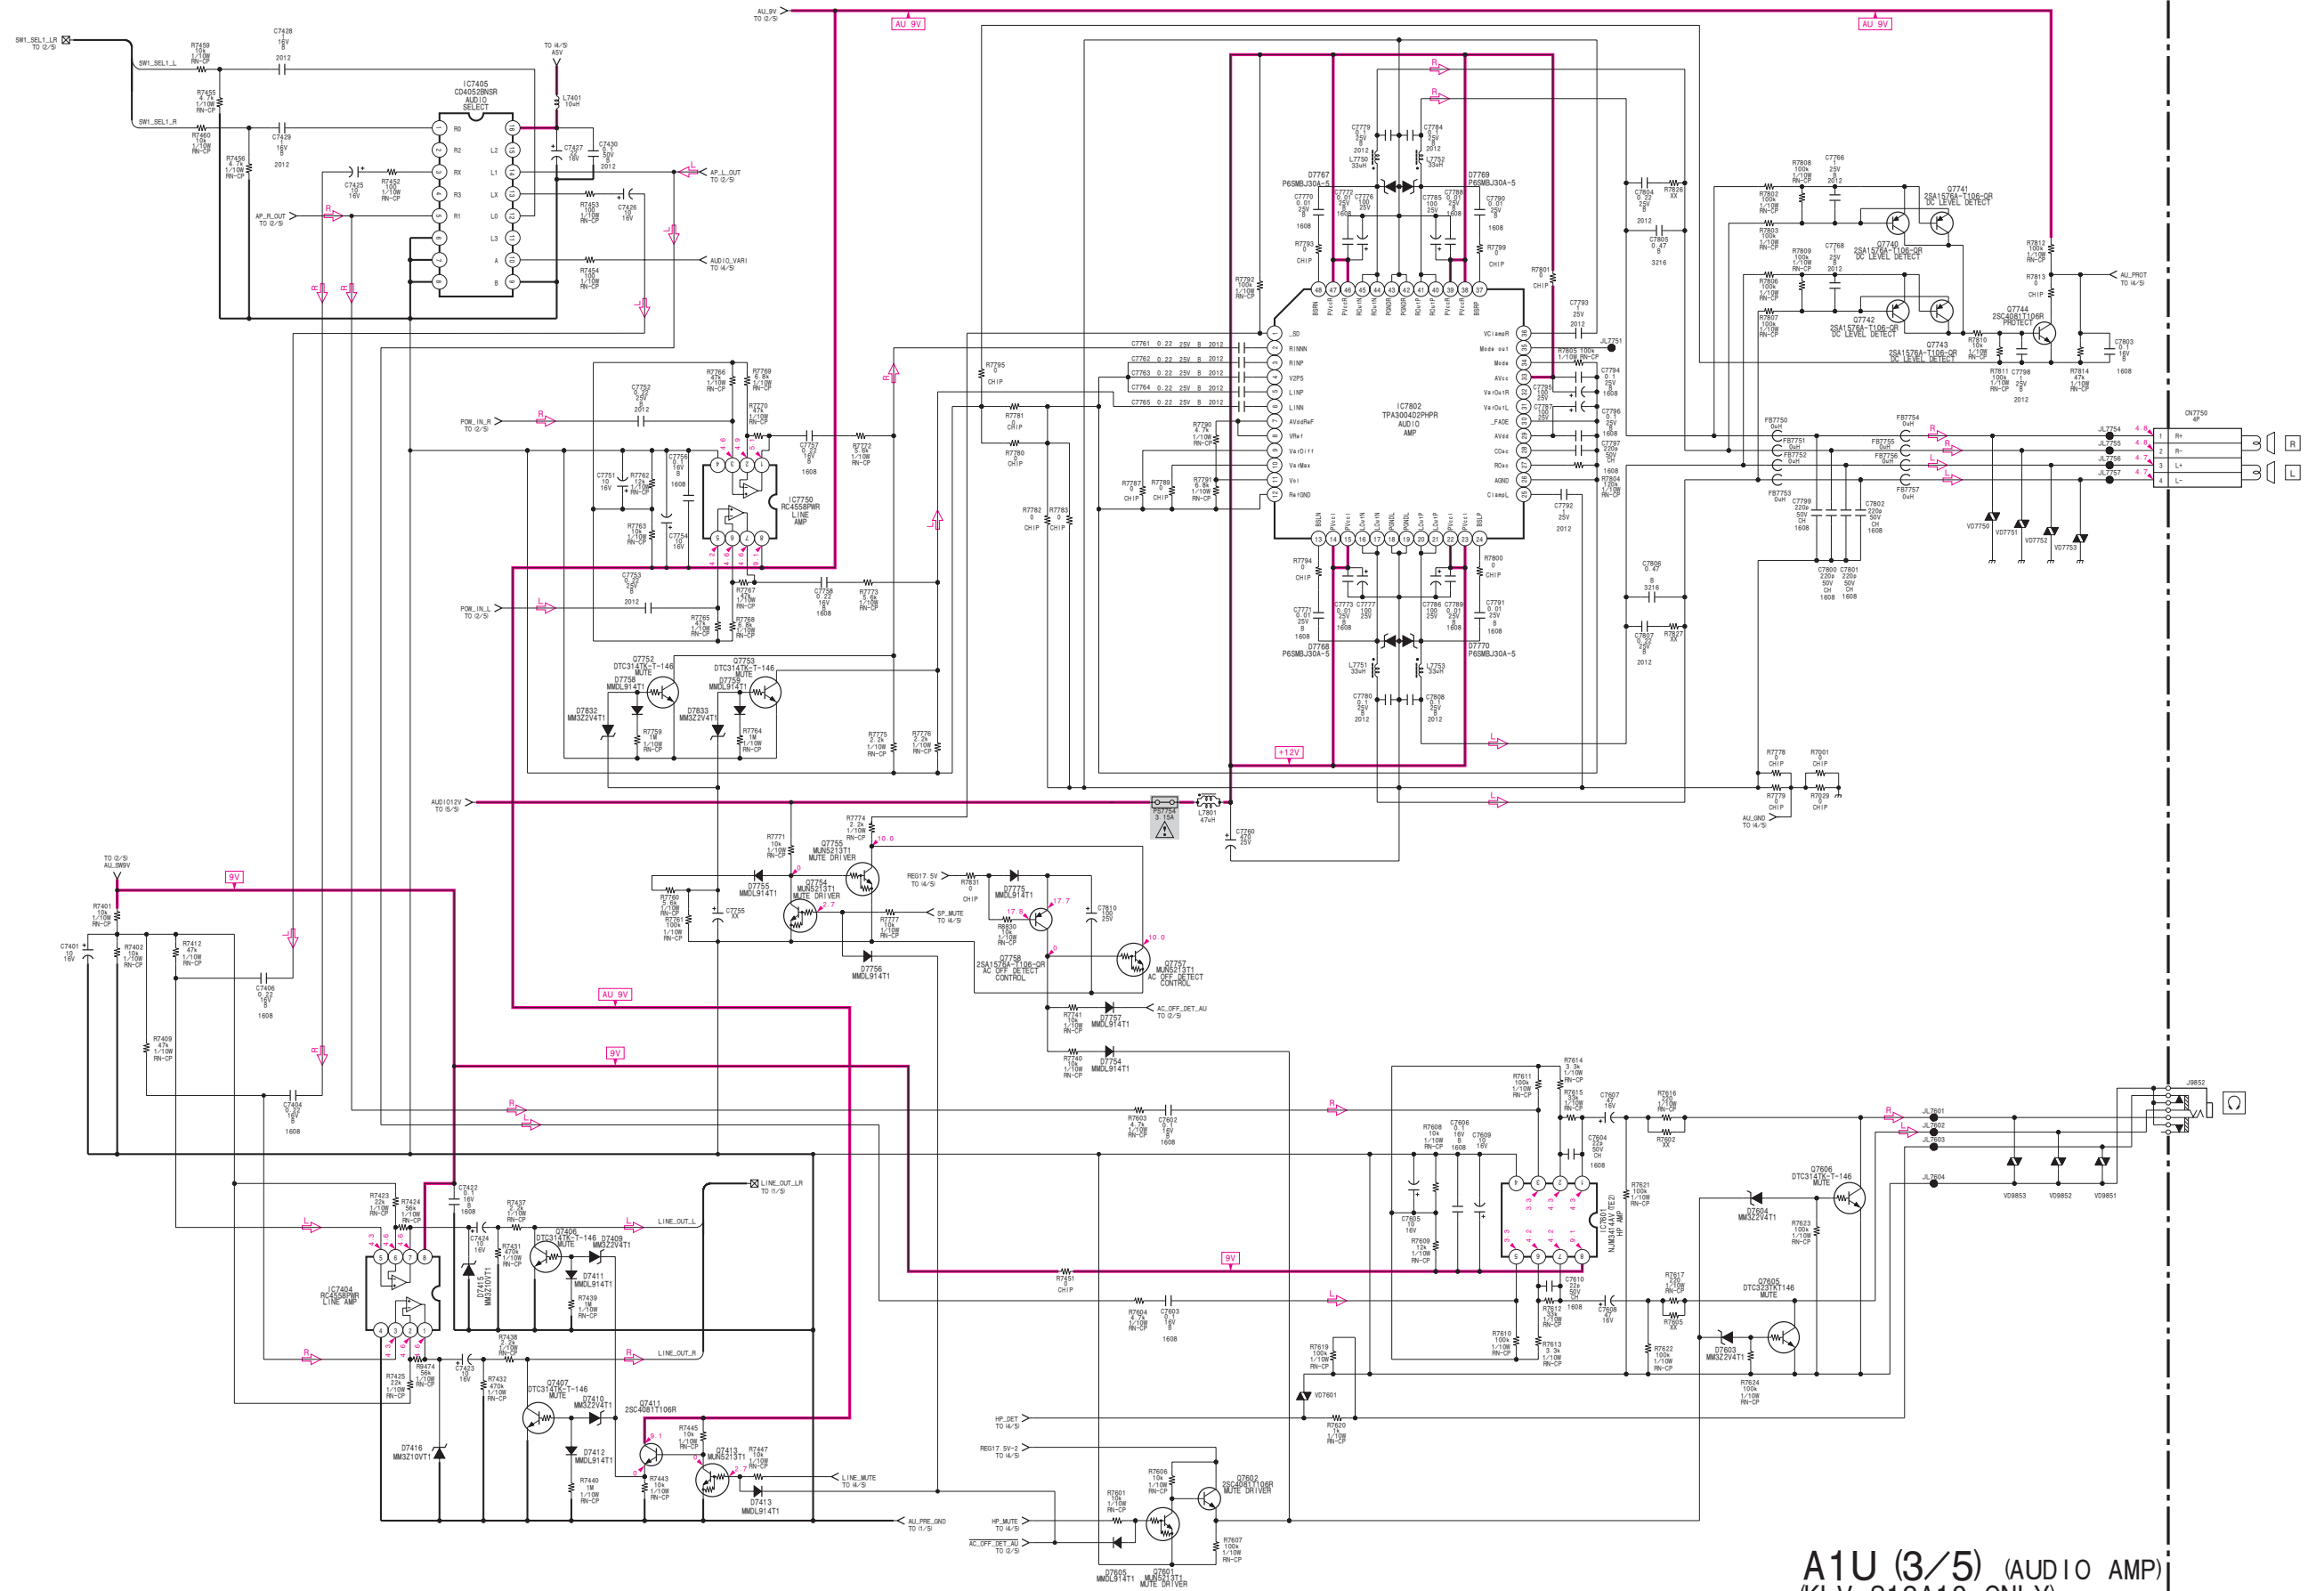

**A1U (3/5) (AUDIO AMP)**  
**(KLV-S19A10 ONLY)**

B-S112682-UC -> A1U-P3

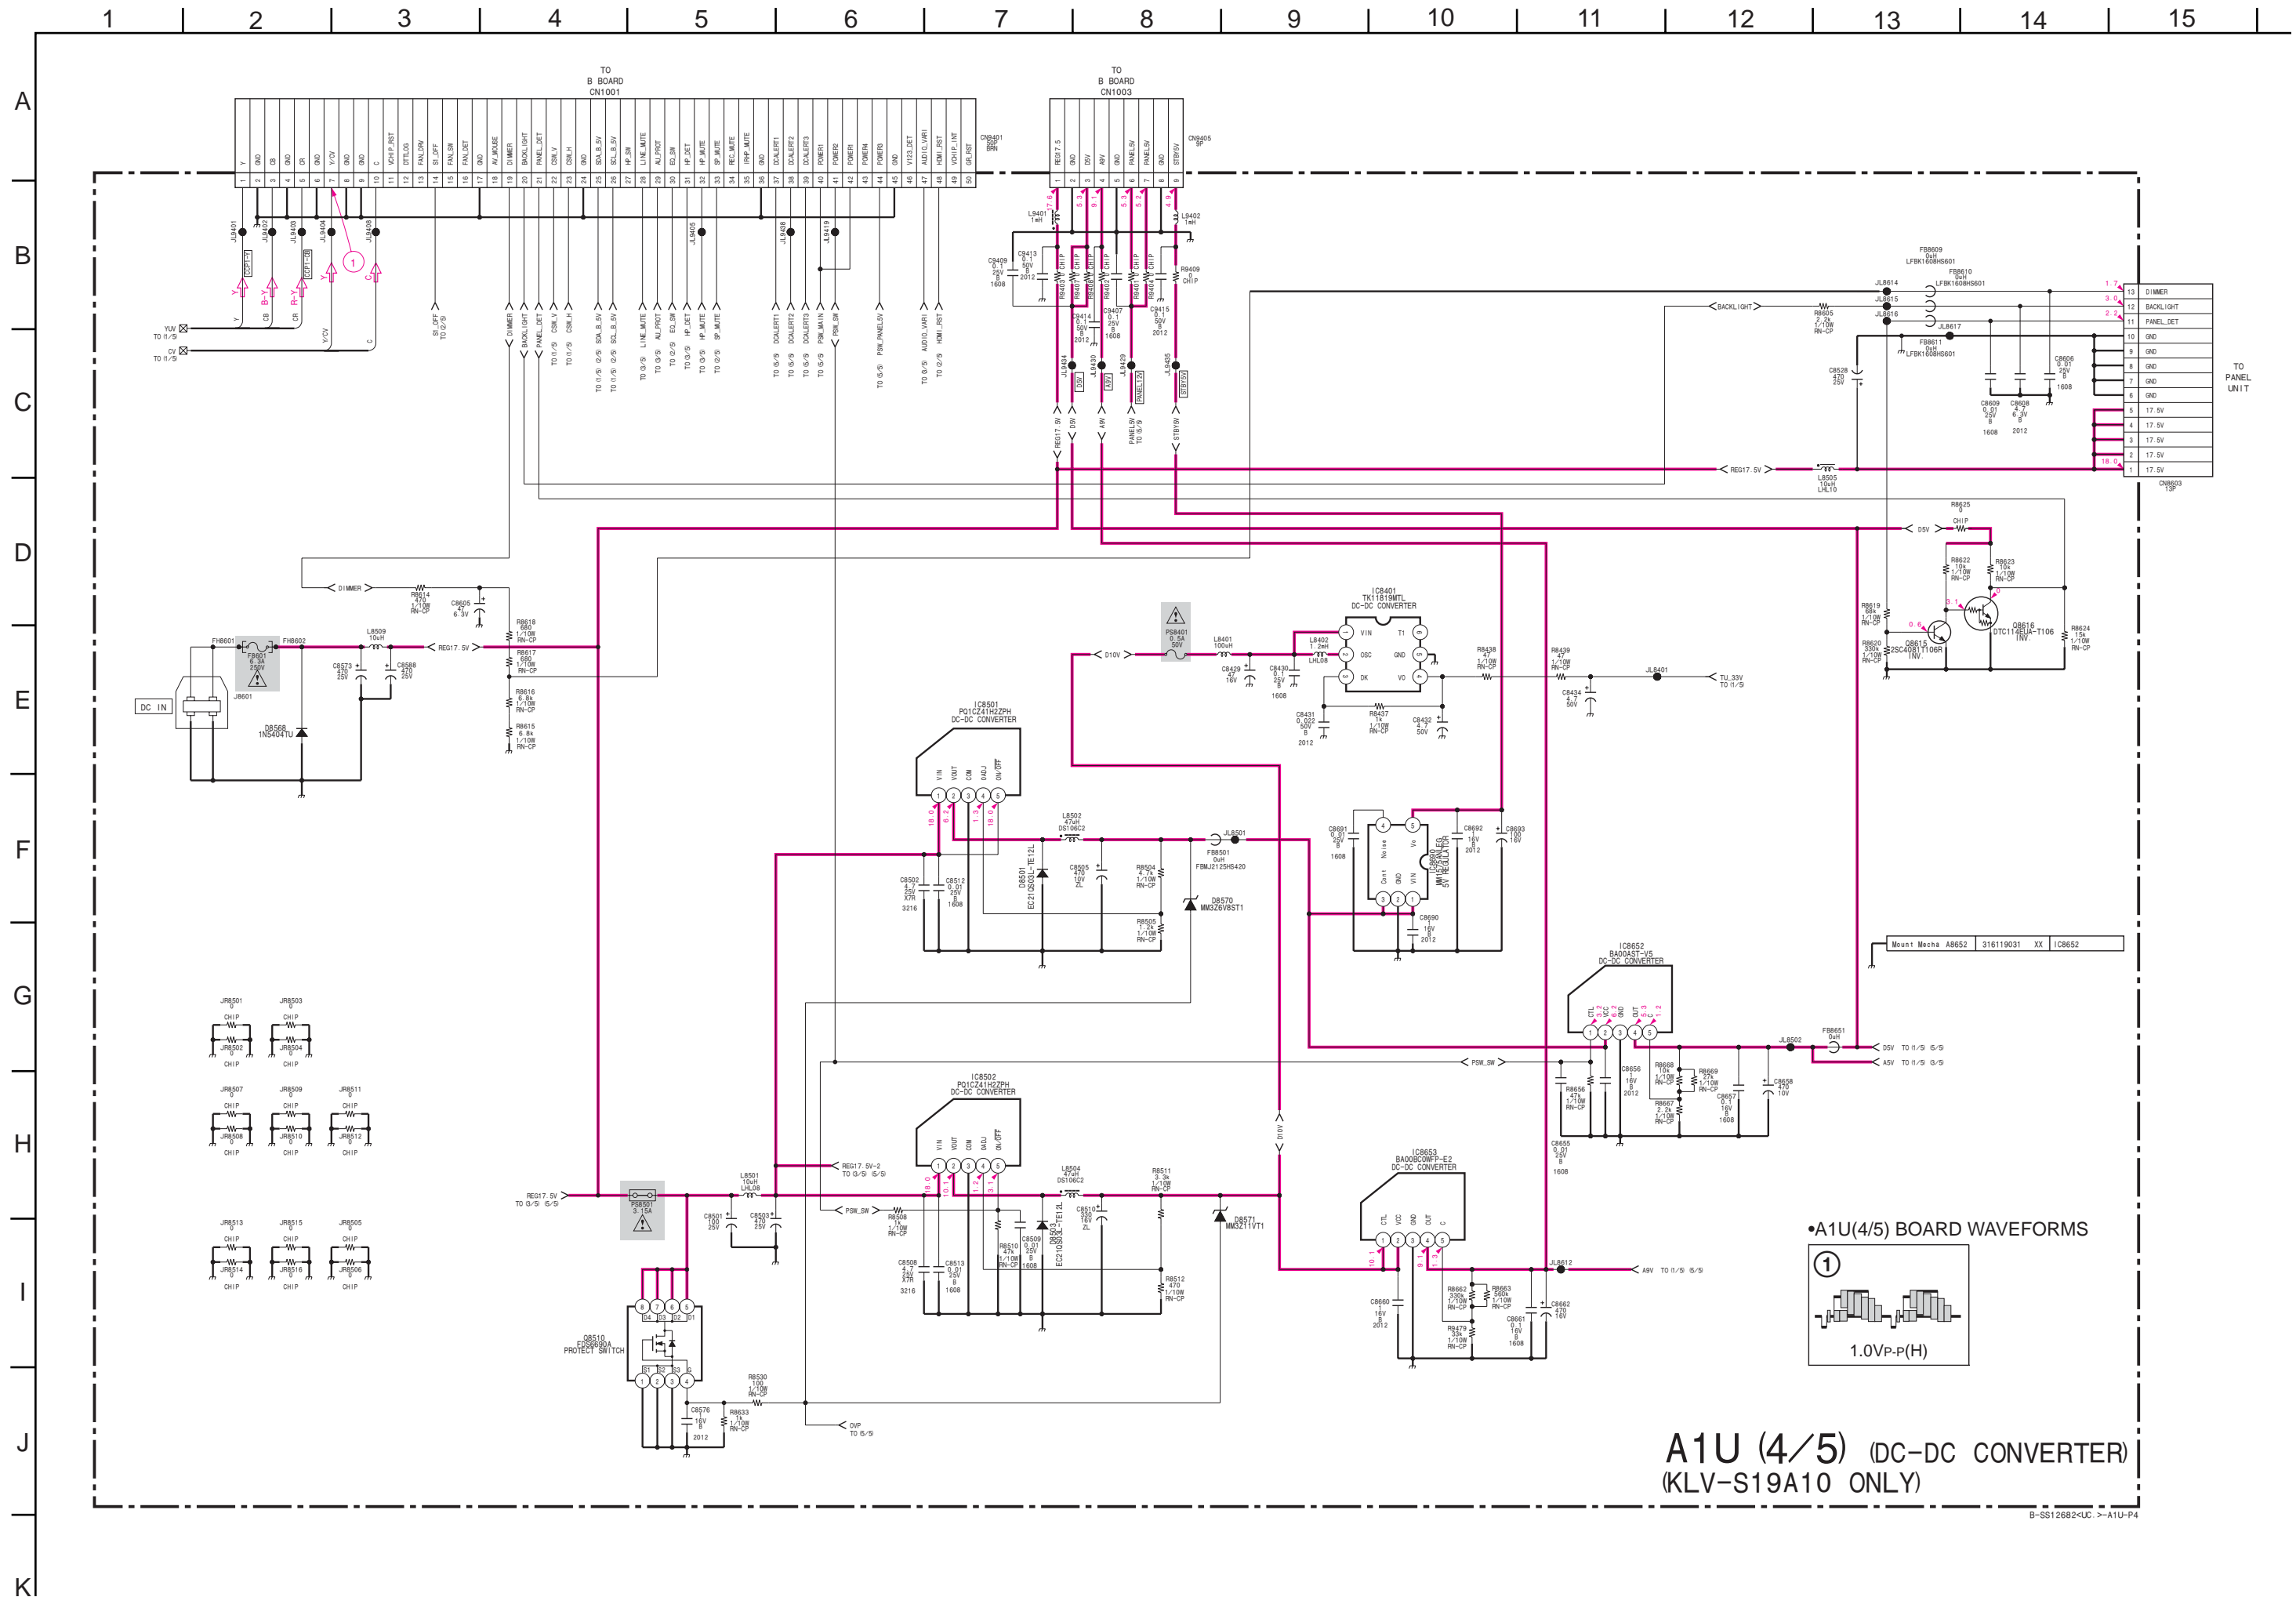







**A1U**

[VIDEO IN/OUT, AUDIO SELECT, AUDIO AMP, DC-DC CONVERTER]  
(KLV-S19A10 Only)

— A1U BOARD —

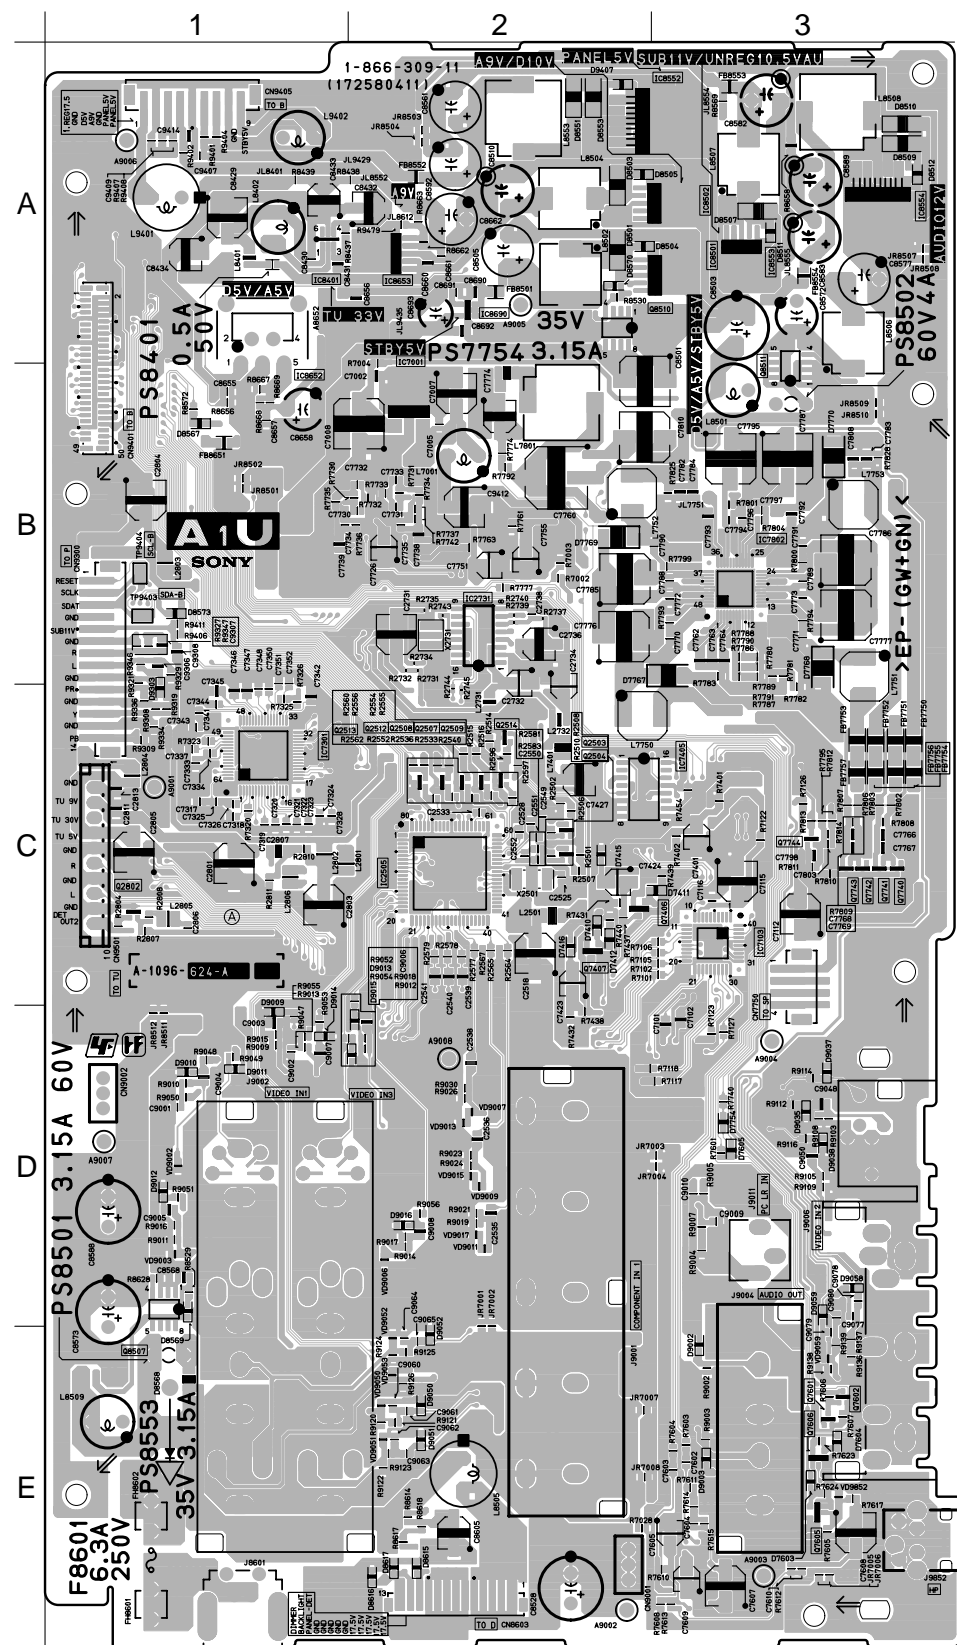



<COMPONENT SIDE>

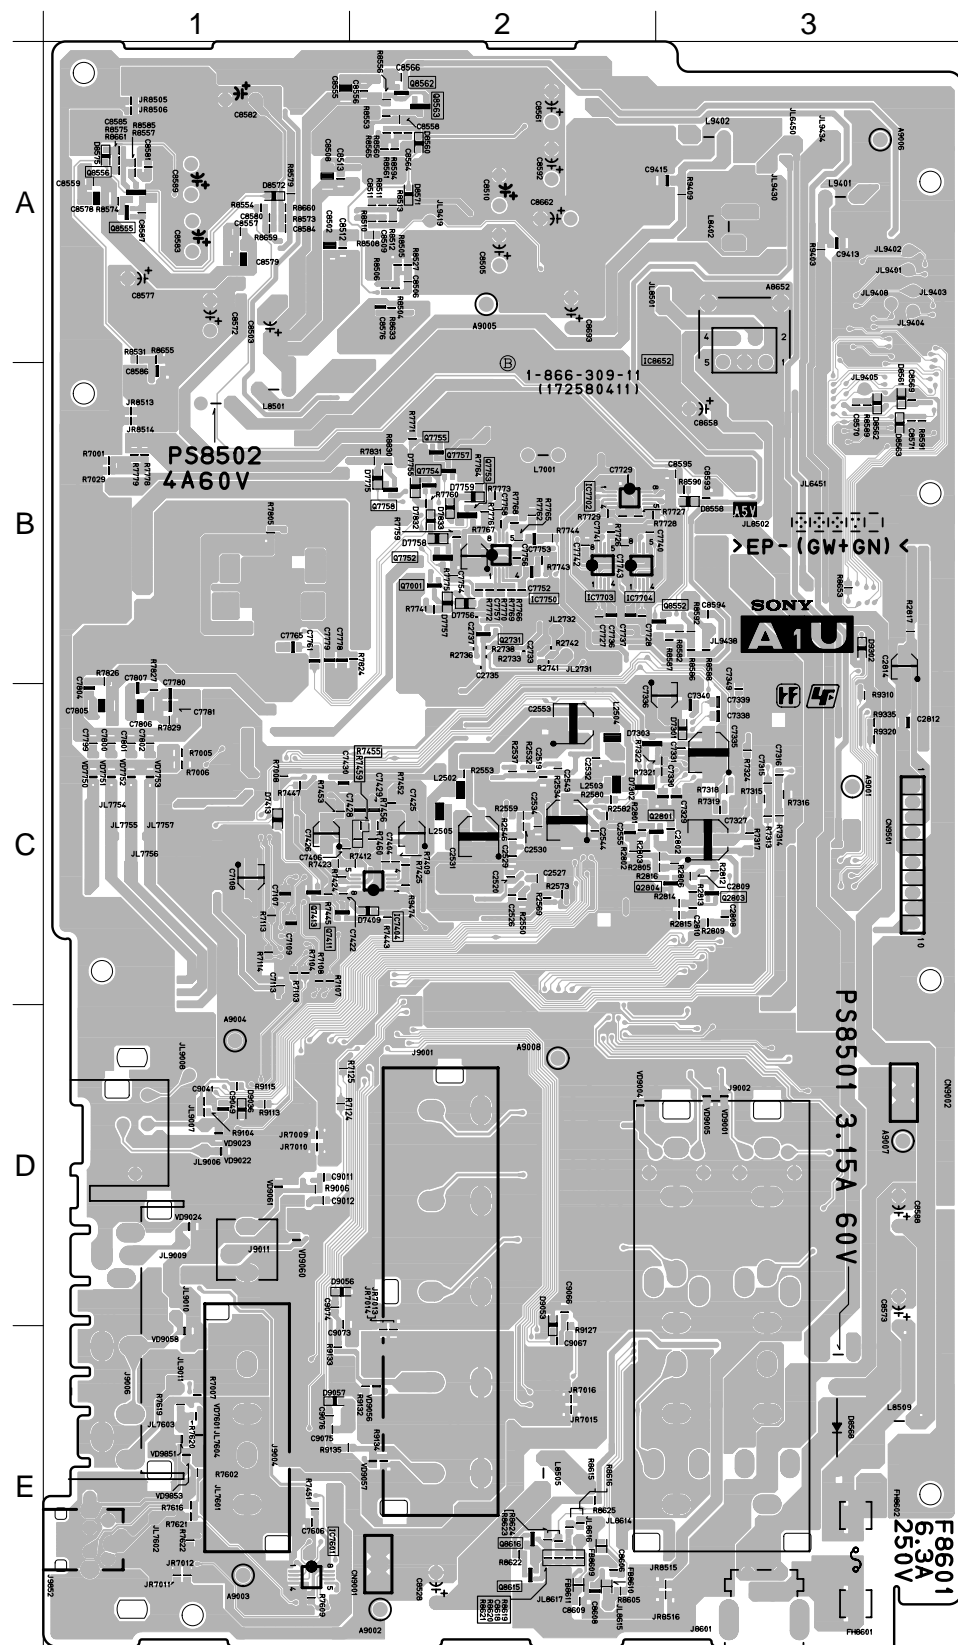




1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----

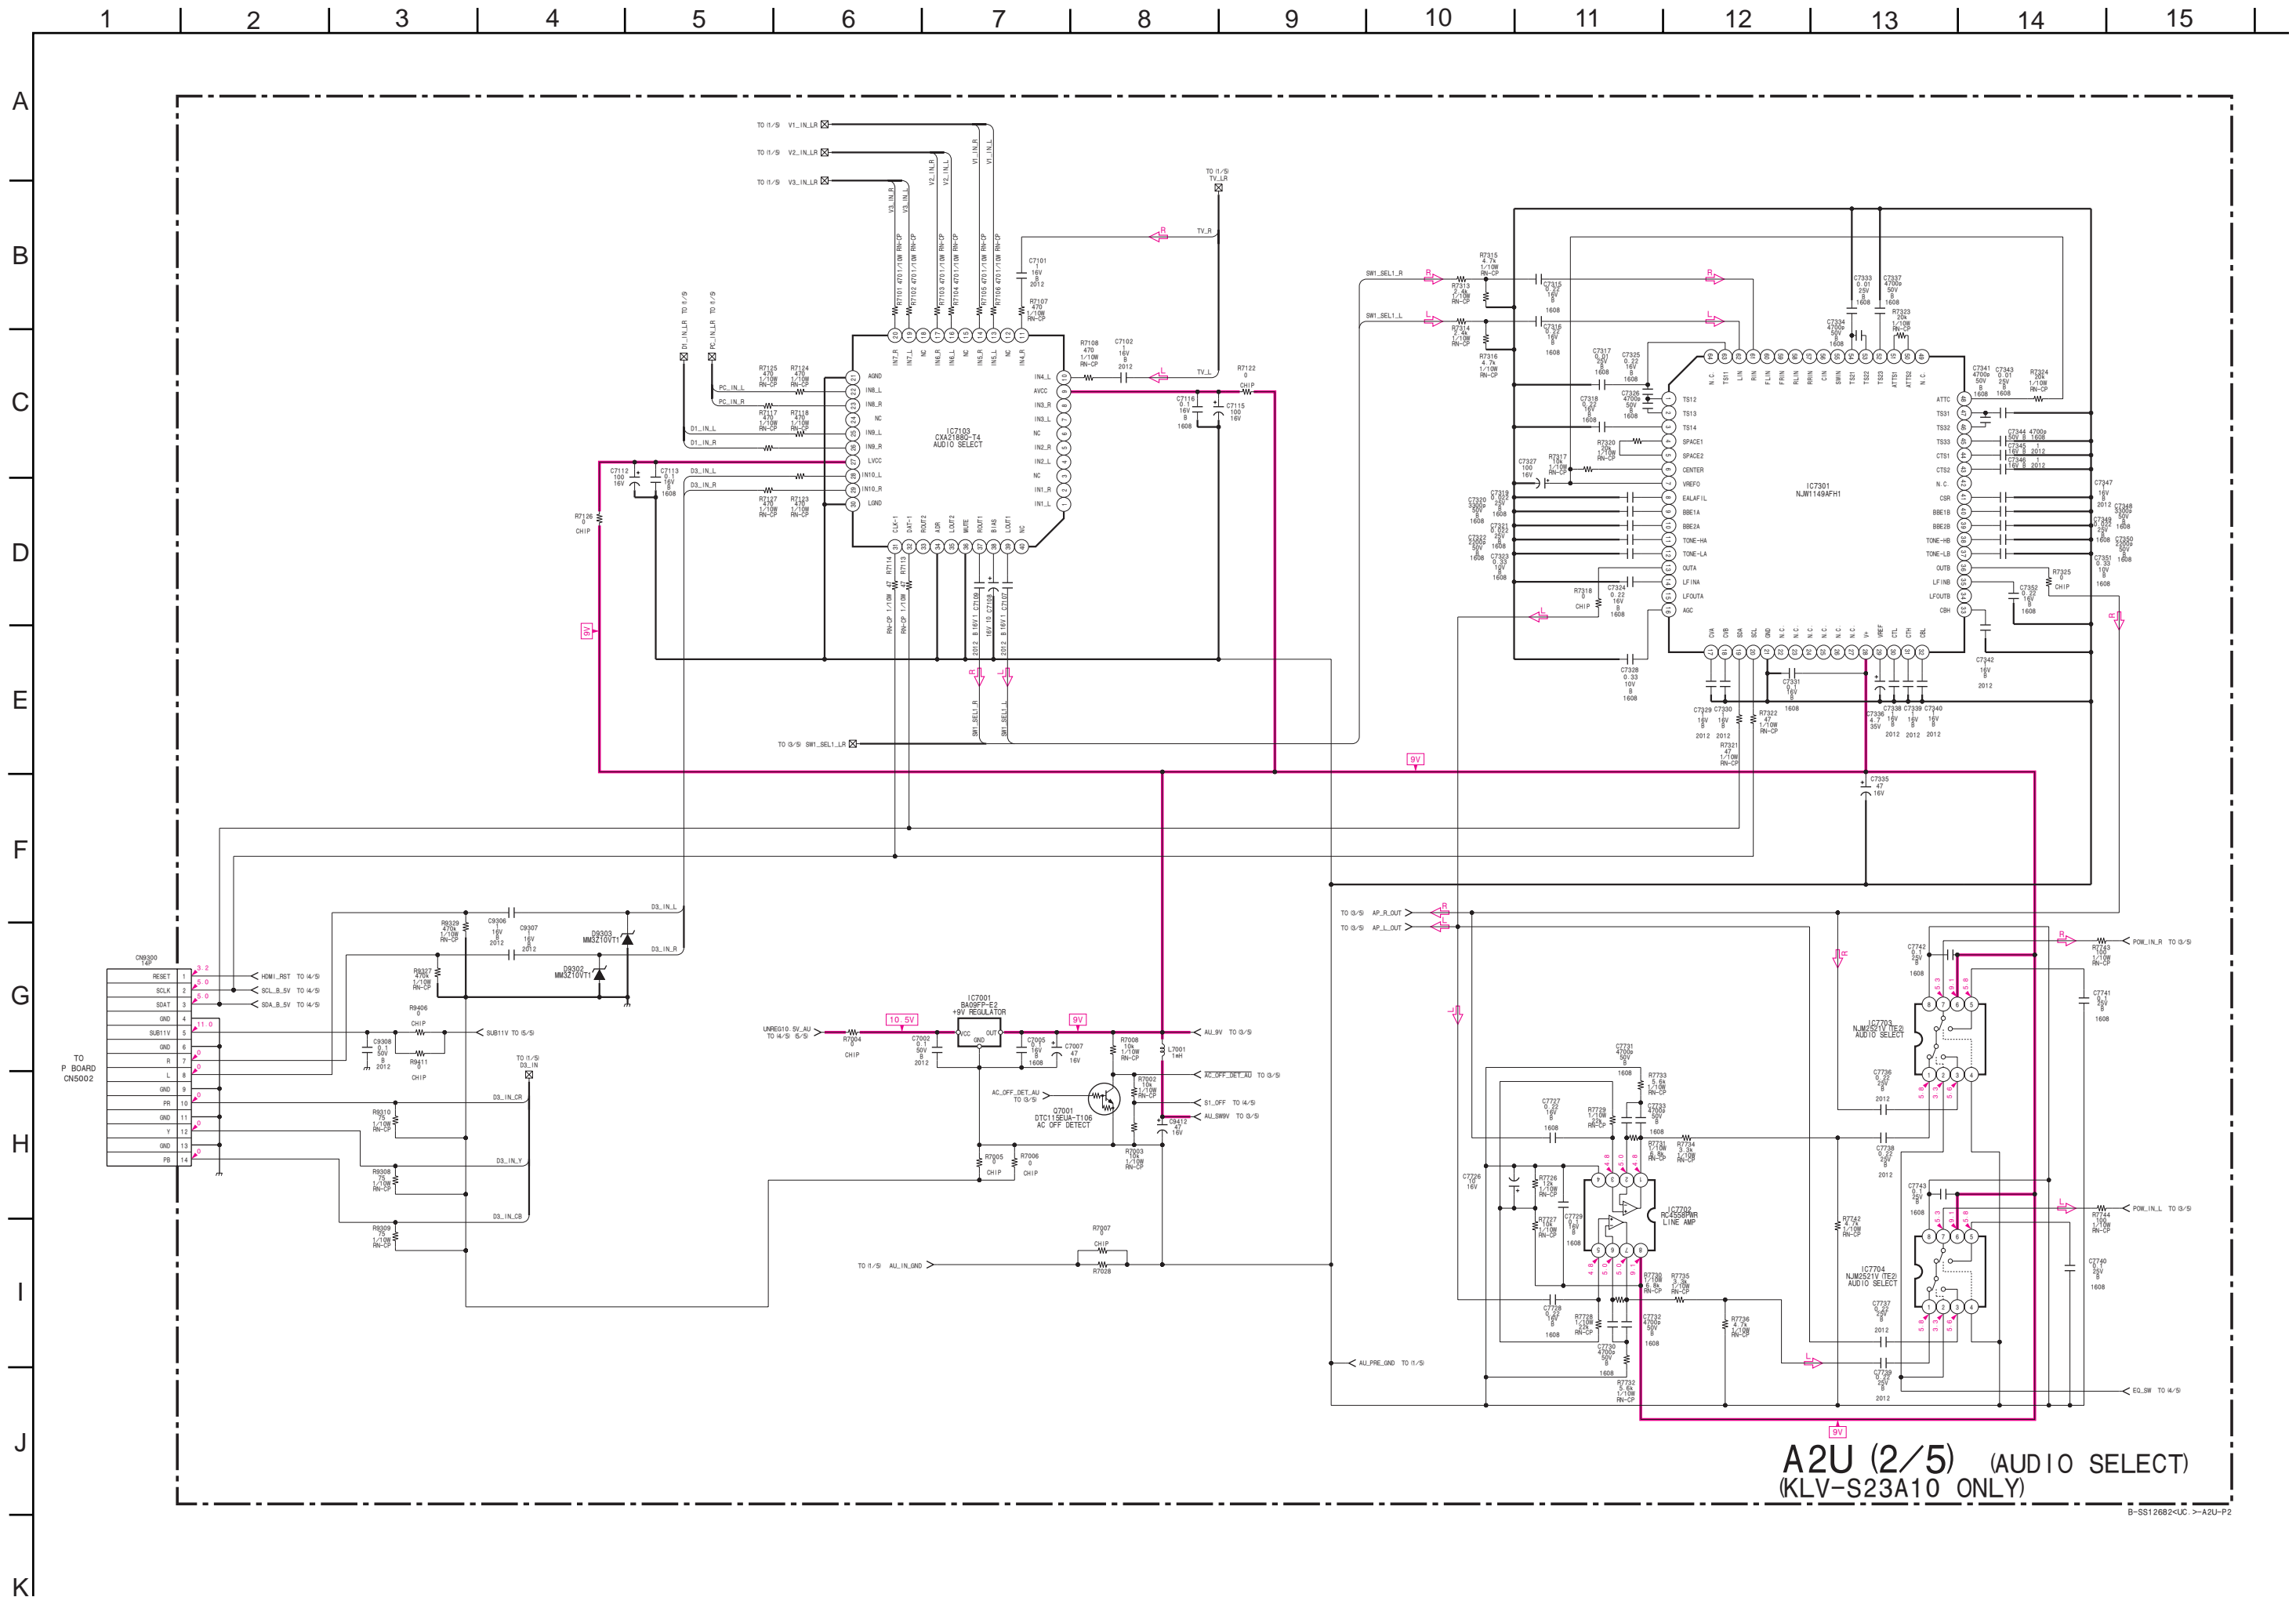

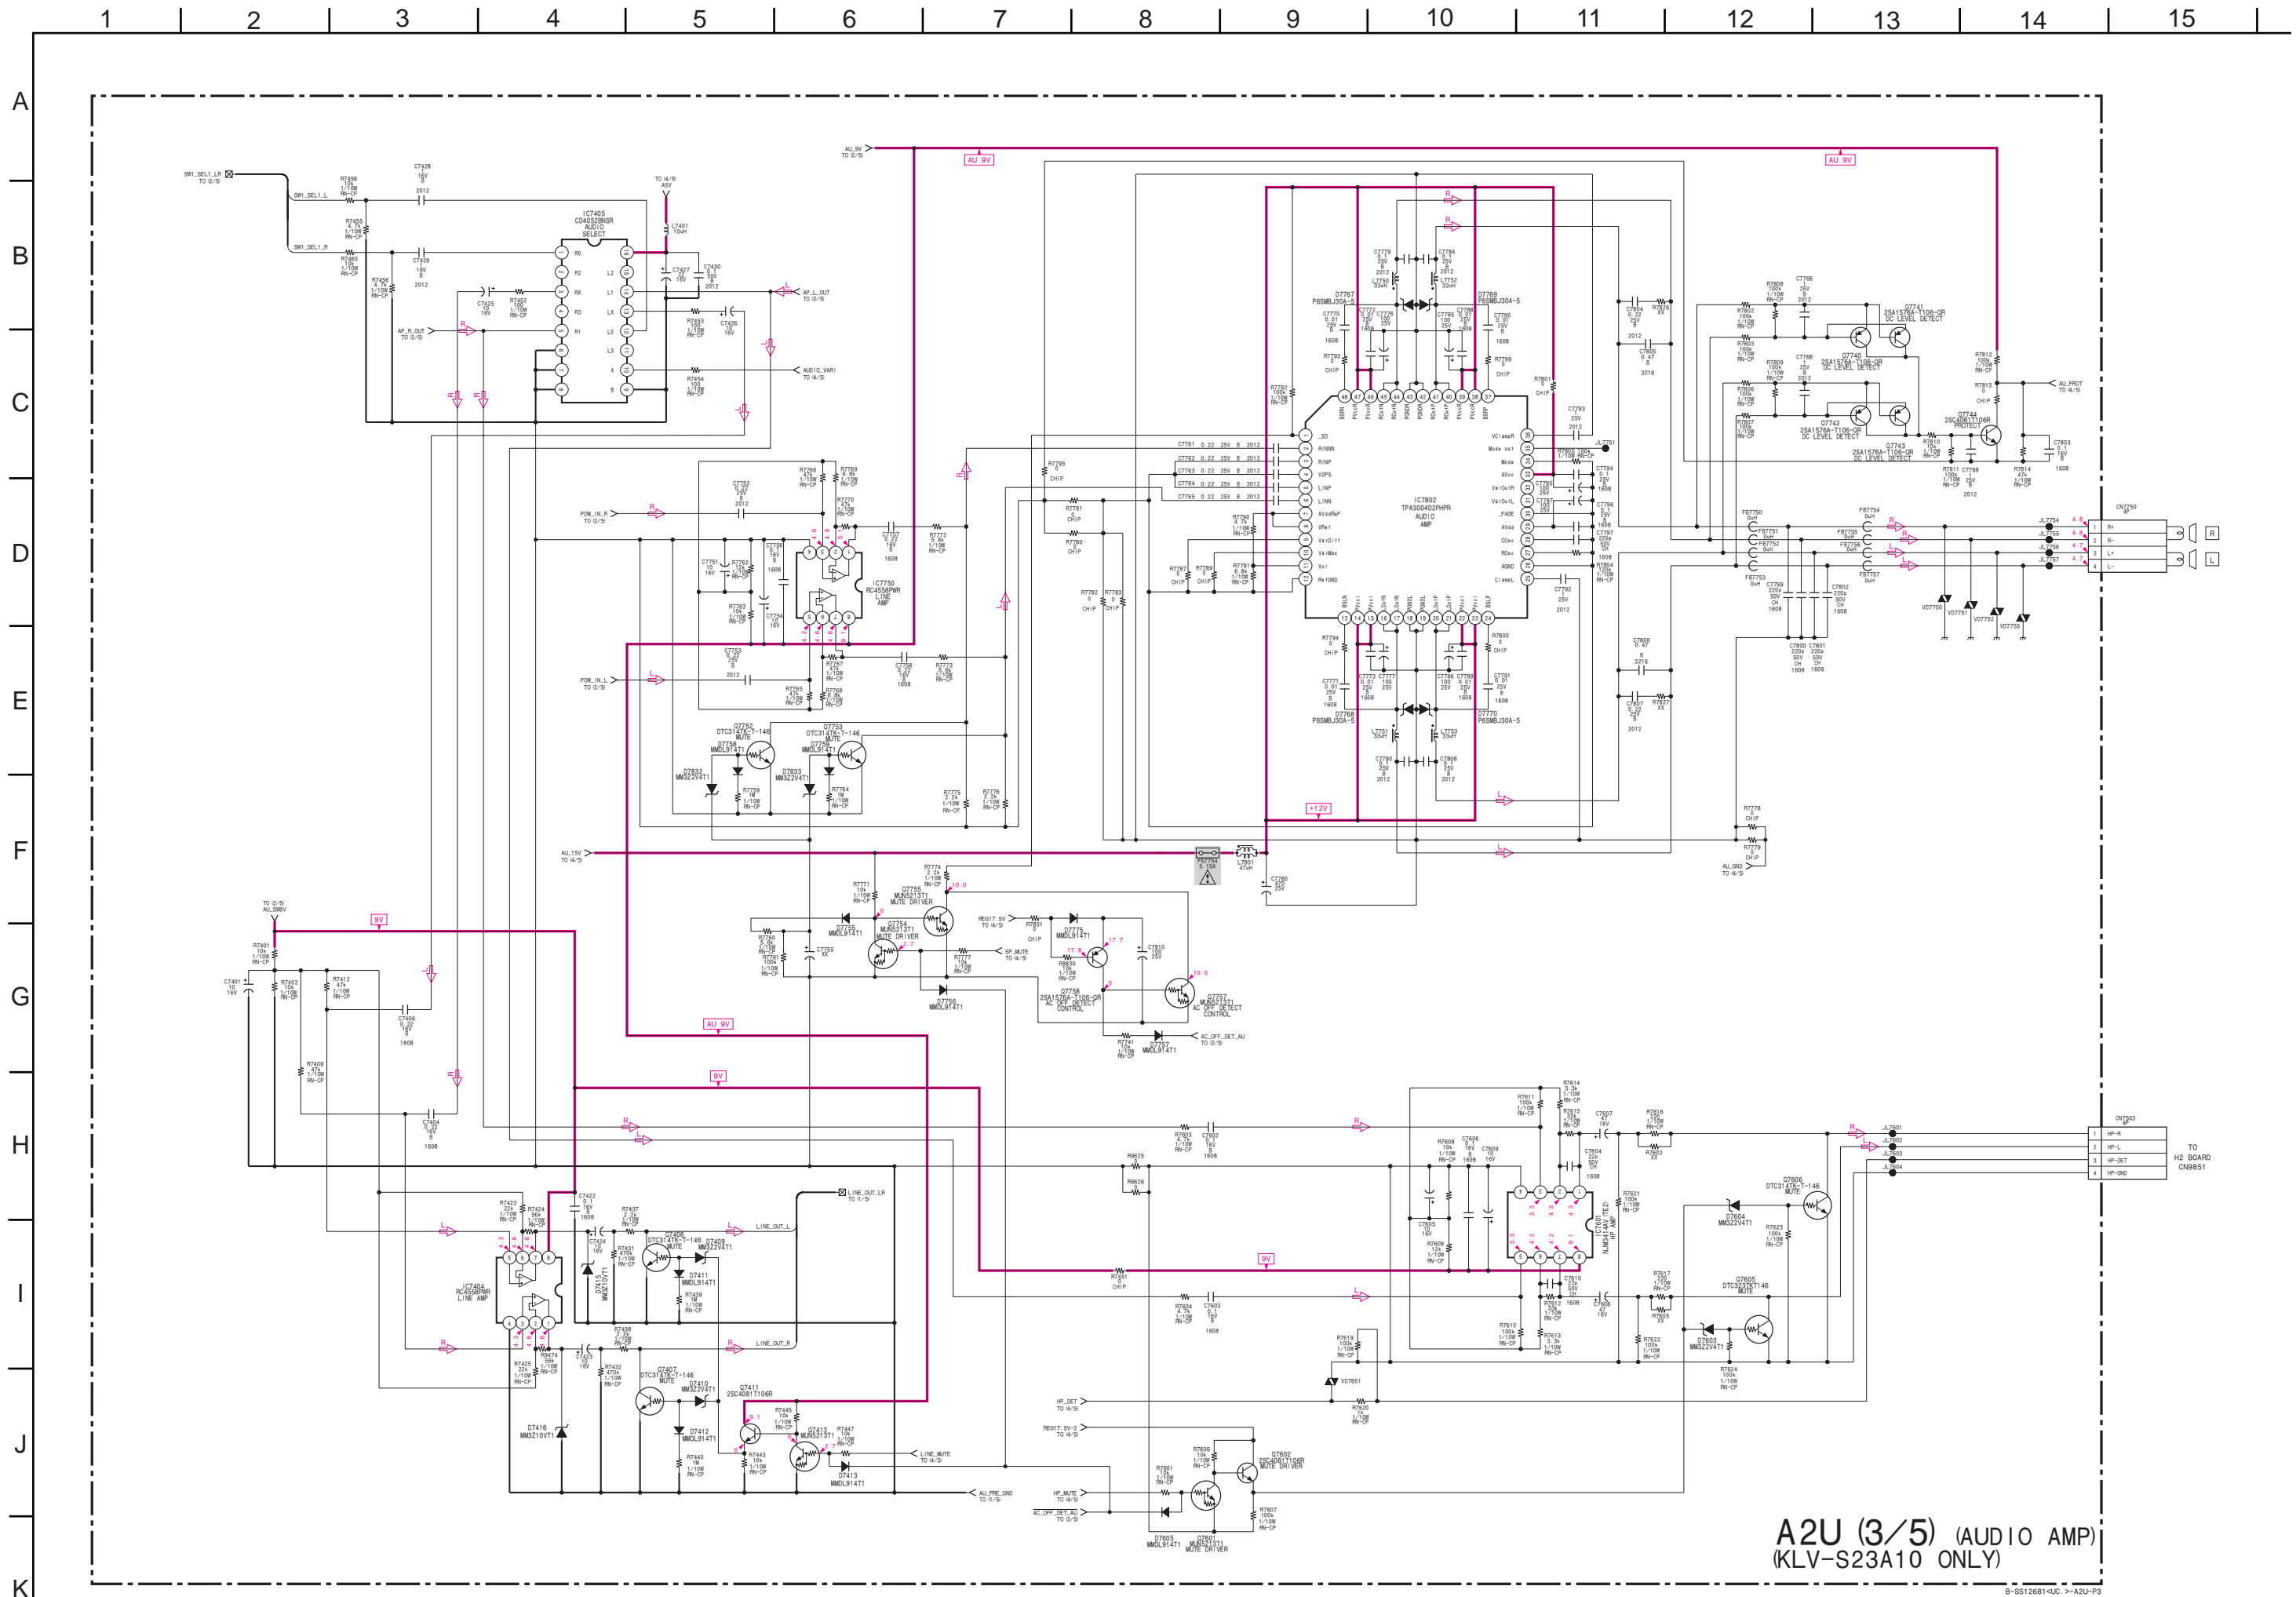



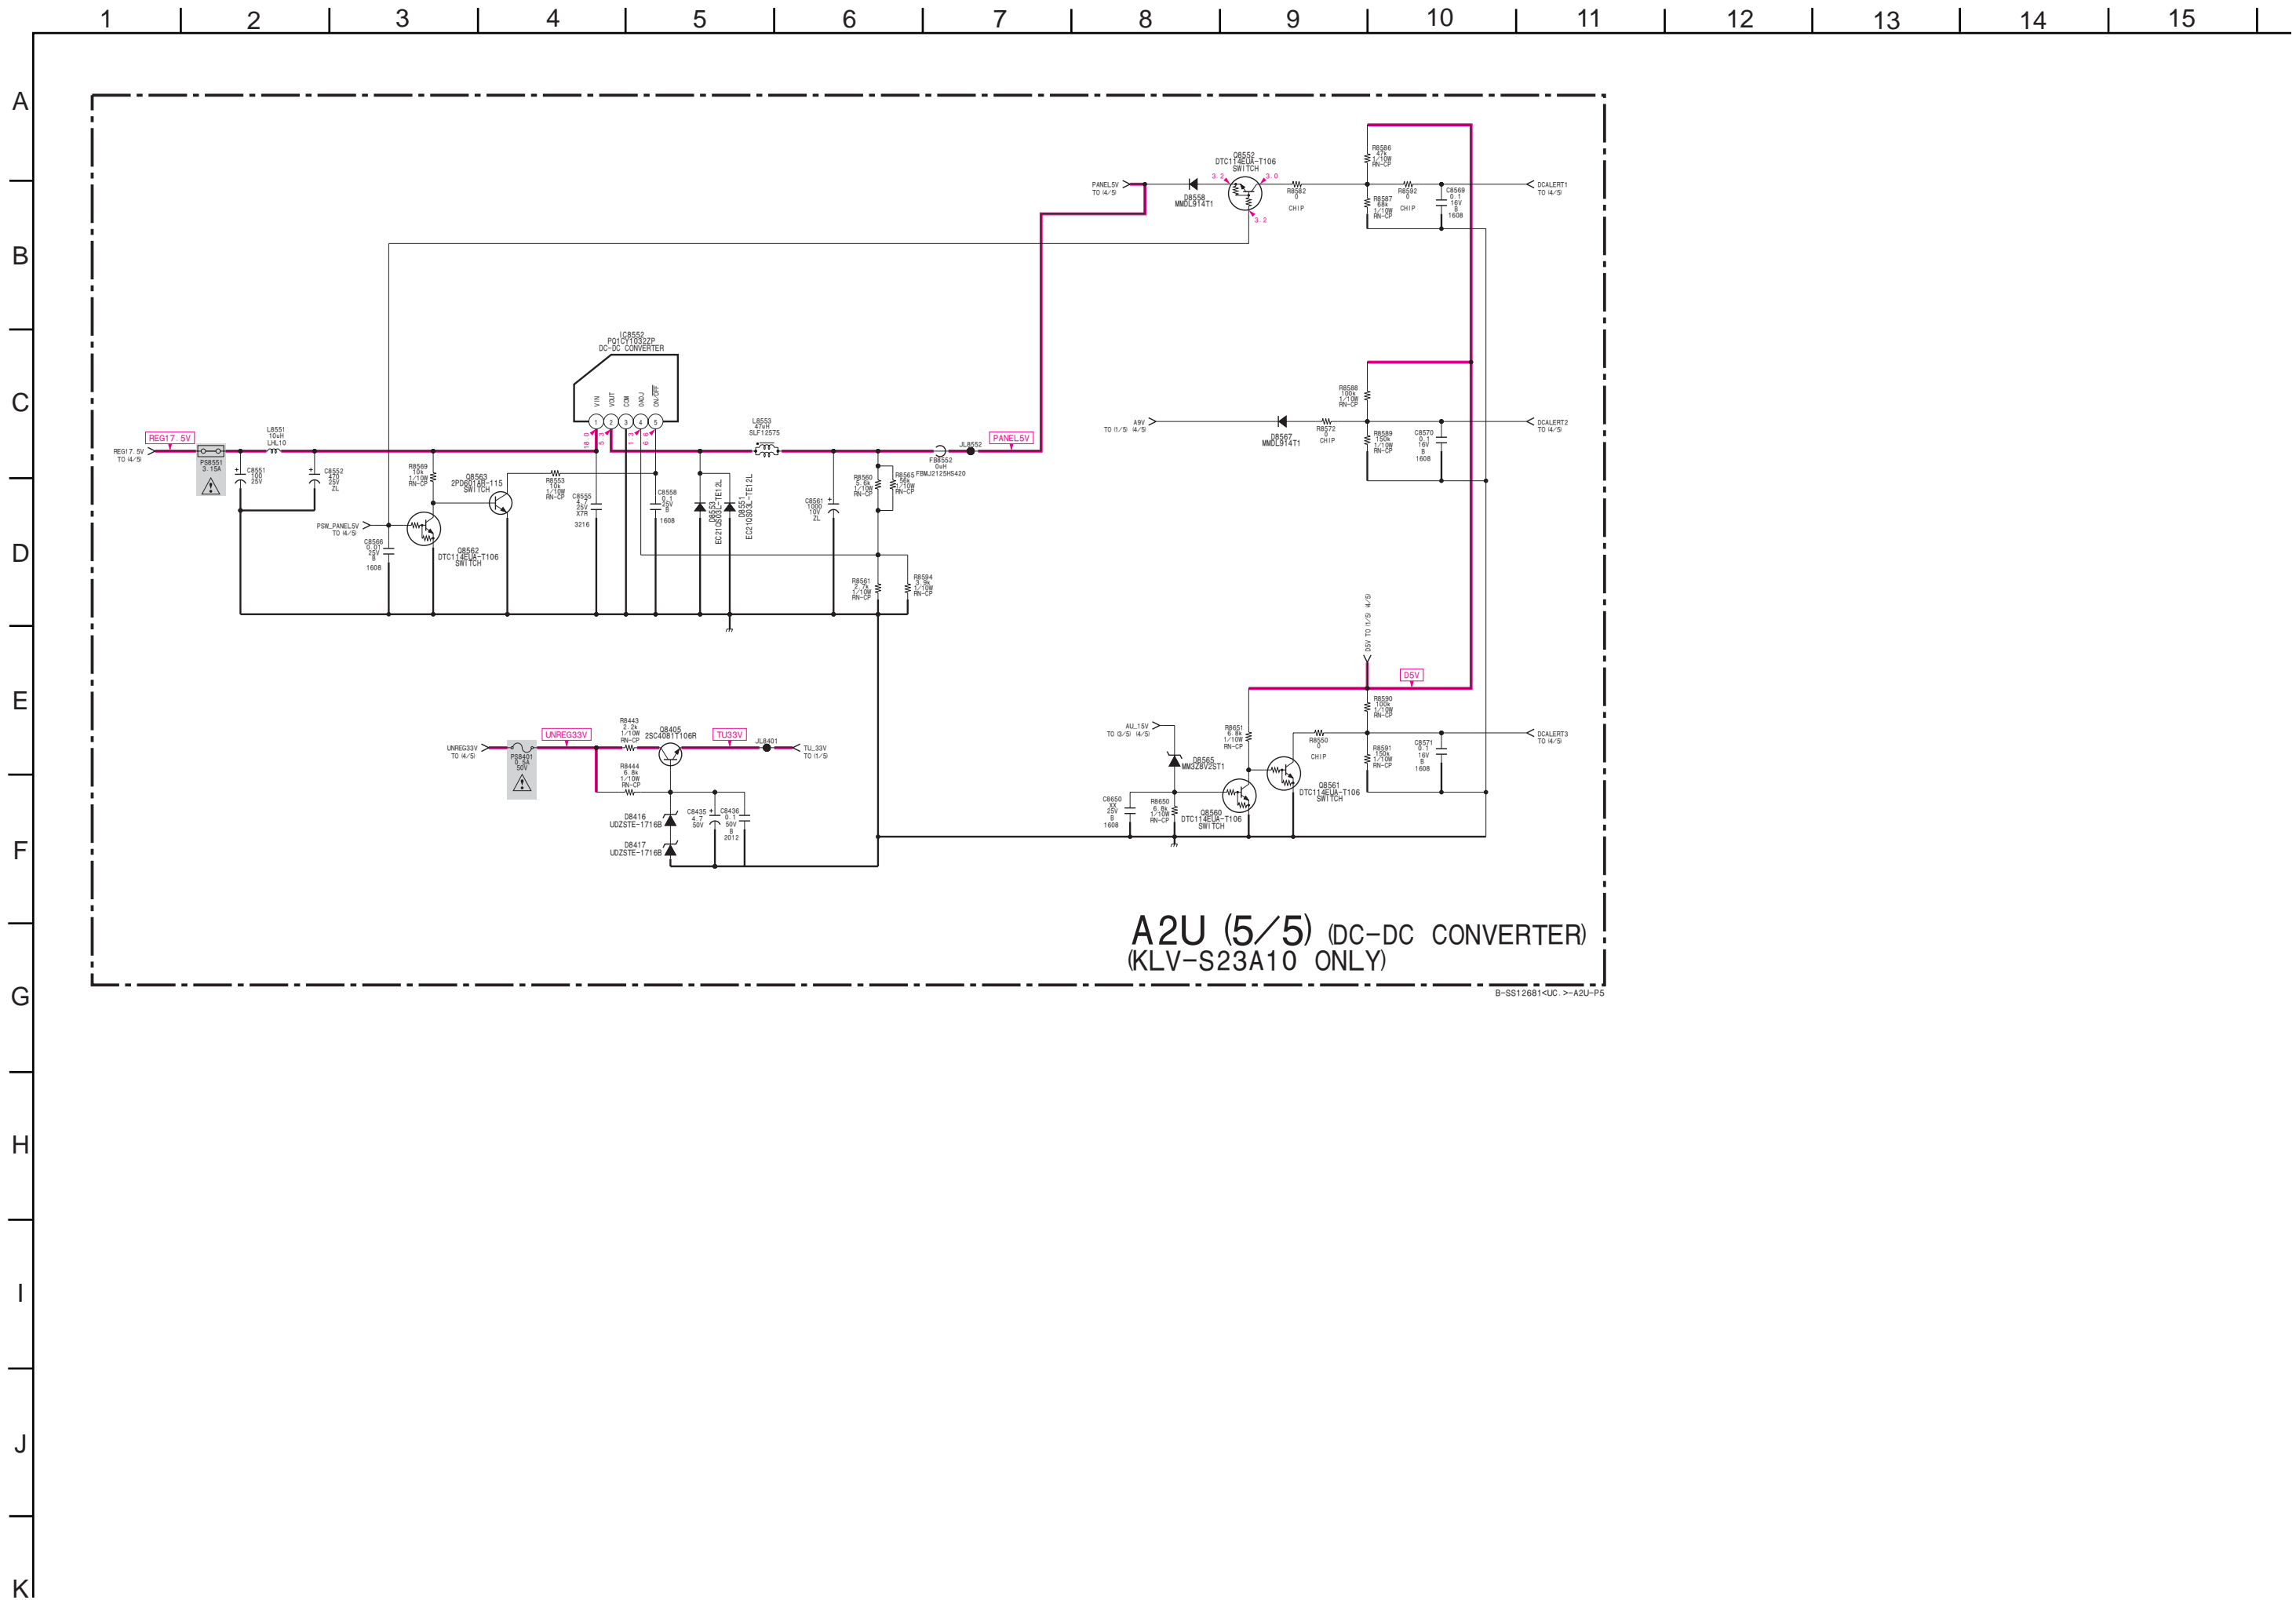





**A2U**

[VIDEO IN/OUT, AUDIO SELECT, AUDIO AMP, DC-DC CONVERTER]  
(KLV-S23A10 Only)

— A2U BOARD —

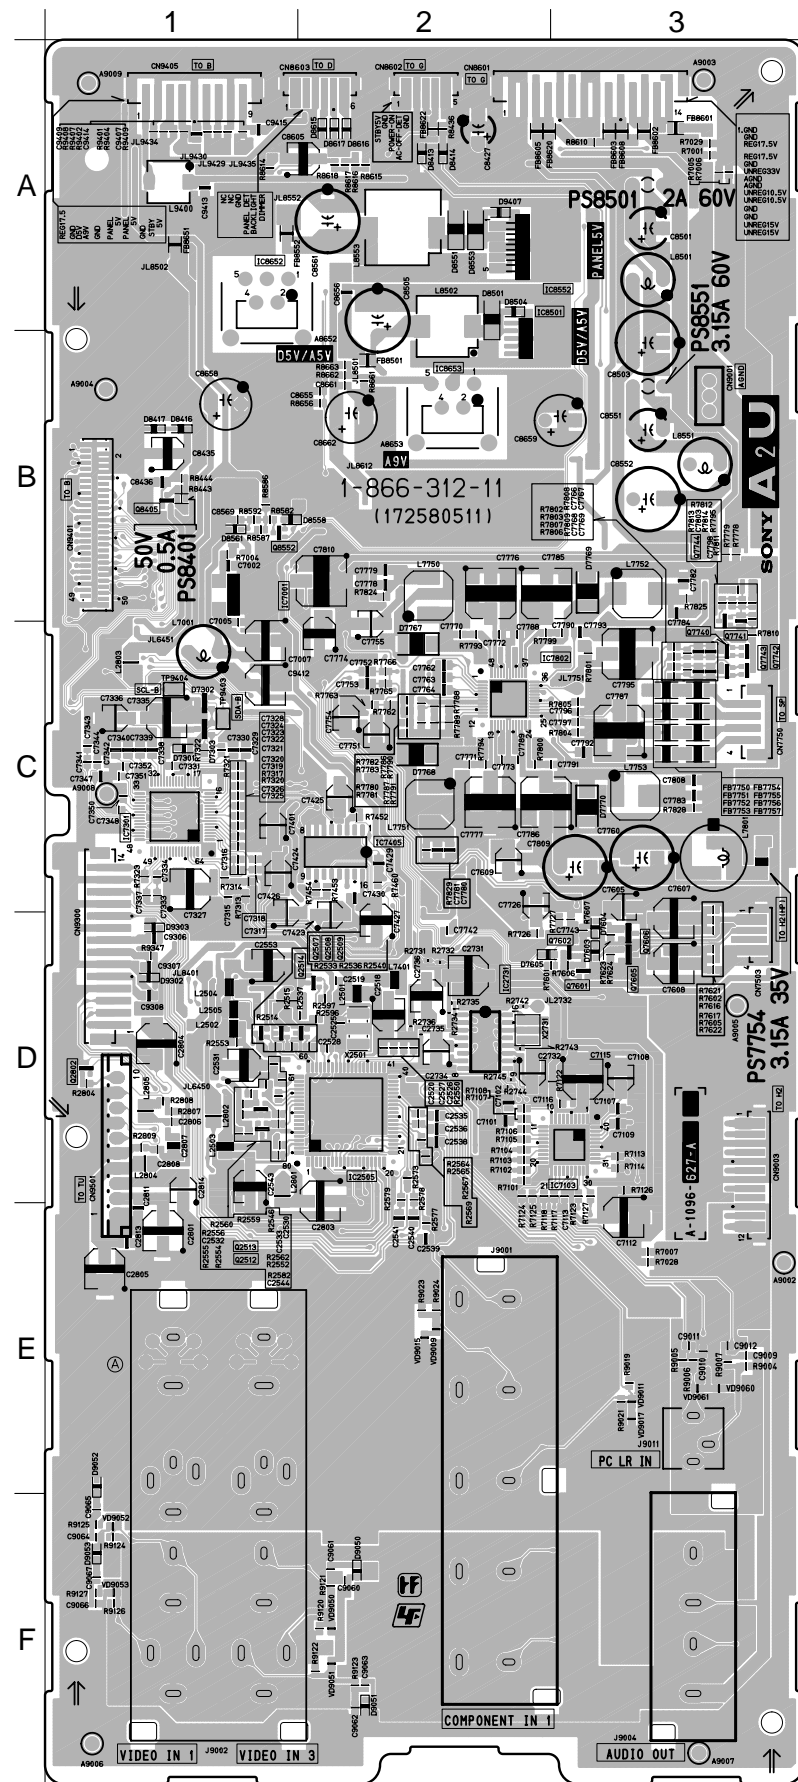

<COMPONENT SIDE>

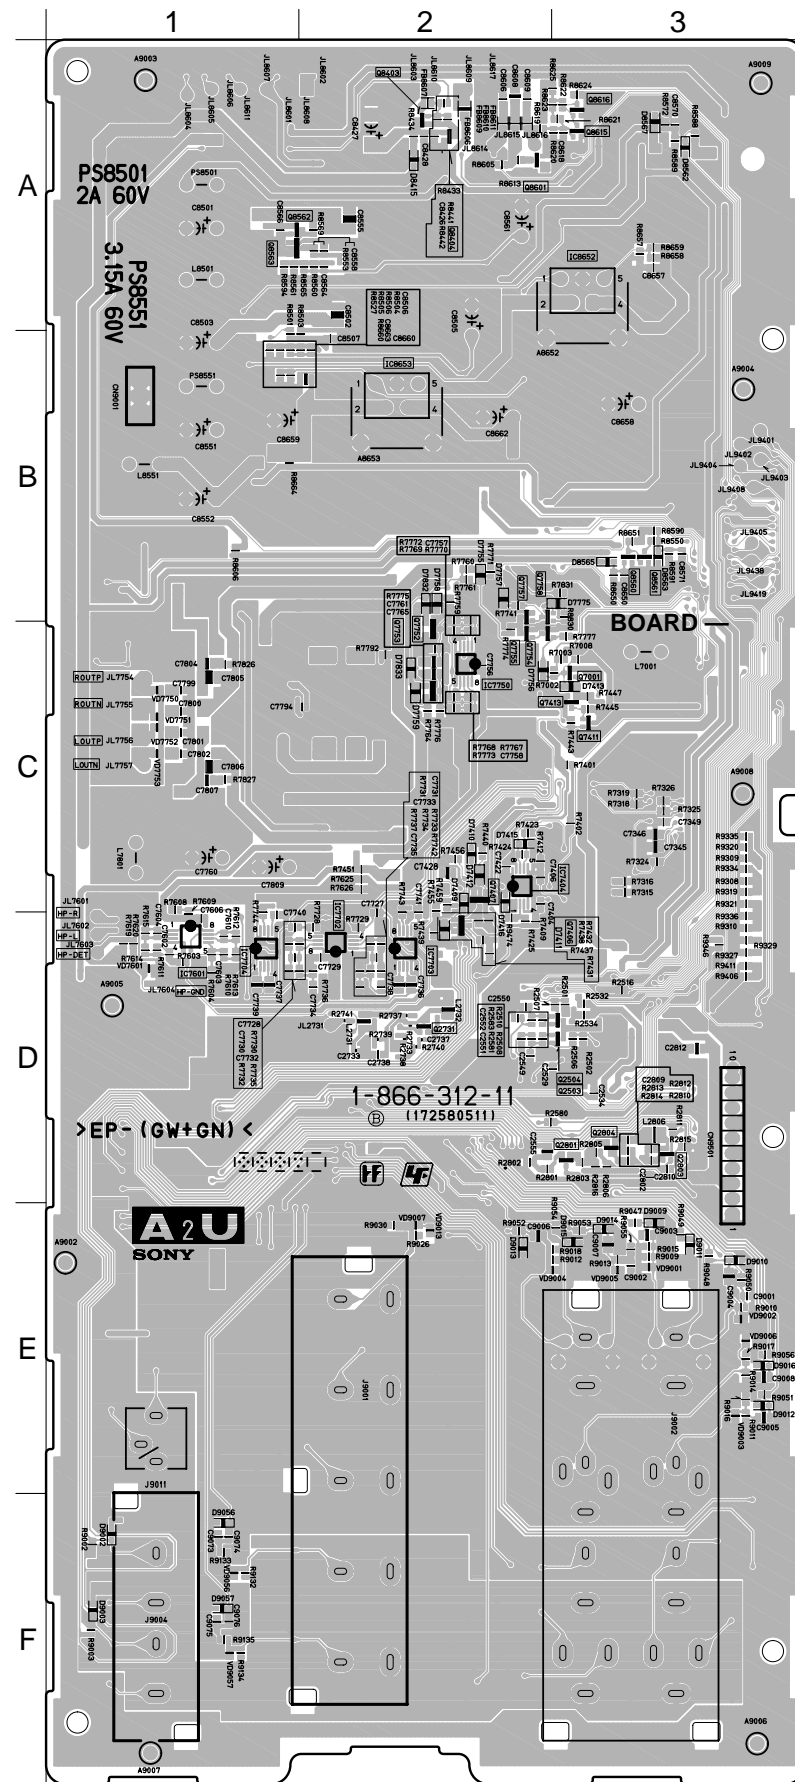

<CONDUCTOR SIDE>

• A2U BOARD SEMICONDUCTOR LOCATION

IC		DIODE		*
(Component Side)	(Conductor Side)	(Component Side)	(Conductor Side)	
IC2505	D-2	D7301	C-1	③
IC2731	D-2	D7302	C-1	⑪
IC7001	B-1	D7303	C-1	⑨
IC7103	D-3	D7409	C-2	③
IC7301	C-1	D7410	C-2	③
IC7404		D7411	D-2	③
IC7405	C-2	D7412	C-2	③
IC7601	D-1	D7413	C-3	③
IC7702	D-2	D7415	C-2	③
IC7703	D-2	D7416	C-2	③
IC7704	D-1	D7603	D-3	③
IC7750	C-2	D7604	D-3	③
IC7802	C-2	D7605	D-2	③
IC8501	B-2	D7755		③
IC8552	A-2	D7756	C-2	③
IC8652	A-1	D7757	B-2	③
IC8653	B-2	D7758	B-2	③
		D7759	C-2	③
TRANSISTOR		D7767	C-2	③
		D7768	C-2	③
		D7769	B-3	③
		D7770	C-3	③
Q2503	D-3	D7775		③
Q2504	D-3	D7832	B-3	③
Q2507	D-1	D7833	C-2	③
Q2508	D-1	D8413	A-2	③
Q2509	D-2	D8414	A-2	③
Q2512	D-1	D8415	A-2	③
Q2513	D-1	D8416	B-1	③
Q2514	D-2	D8417	B-1	③
Q2731		D8501	A-2	③
Q2801	D-3	D8504	A-2	③
Q2802	D-1	D8551	A-2	③
Q2803	D-3	D8553	A-2	③
Q2804	D-3	D8558	B-1	③
Q7001	C-3	D8561	B-1	③
Q7406	D-2	D8562	A-3	③
Q7407	C-2	D8563	B-3	③
Q7411	C-3	D8565	B-3	③
Q7413	C-3	D8567	A-3	③
Q7601	D-3	D8615	A-2	③
Q7602	D-3	D8616	A-2	③
Q7605	D-3	D8617	A-2	③
Q7606	D-3	D9002	F-1	③
Q7740	C-3	D9003	F-1	③
Q7741	C-3	D9009	E-3	③
Q7742	C-3	D9010	E-3	③
Q7743	C-3	D9011	E-3	③
Q7744	B-3	D9012	E-3	③
Q7752		D9013	E-2	③
Q7753	C-2	D9014	E-3	③
Q7754	C-2	D9015	E-3	③
Q7755	C-2	D9016	E-3	③
Q7757	B-2	D9050	F-2	③
Q7758	B-2	D9051	F-2	③
Q8403	A-2	D9052	E-1	③
Q8404	A-2	D9053	F-1	③
Q8405	B-1	D9056		③
Q8552	B-1	D9057	F-1	③
Q8560		D9302	D-1	③
Q8561	B-3	D9303	D-1	③
Q8562	A-1	D9407	A-2	③
Q8563	A-1			③
Q8601	A-2			③
Q8615	A-3			③
Q8616	A-3			③

\*: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-10)

**G1**  
(POWER SUPPLY)  
(KLV-S23A10 ONLY)

8-SS12681-UC >-G1



IC		
(Component Side)	(Conductor Side)	
IIC6100	A-4	D6103 A-5 -
IC6200	B-5	D6104 A-4 -
IC6300	B-4	D6105 A-5 ⑪
IC6301	B-4	D6106 A-5 ③
IC6402	B-5	D6107 A-4 ③
IC6502	A-4	D6108 B-4 ③
IC6503	B-4	D6200 A-6 -
		D6201 B-6 -
		D6203 A-6 -
		D6204 A-6 -
		D6205 A-6 -
		D6207 B-6 -
		D6210 B-6 ③
		D6300 B-2 -
		D6301 B-4 ③
		D6302 B-4 -
		D6303 B-5 -
		D6304 B-5 -
		D6305 B-5 -
		D6306 B-5 ③
		D6307 B-4 -
		D6308 B-5 -
		D6400 B-1 ③
		D6402 B-3 ③
		D6405 A-4 -
		D6407 B-6 ③
		D6408 B-6 ③
		D6501 B-3 ⑪
		D6502 B-4 -
		D6506 A-3 -
		D6507 A-3 ③
		D6509 B-4 ③
		D6510 A-4 ③
		D6511 A-4 ③
		D6512 A-4 ③
		D6513 B-4 ③

TRANSISTOR		
(Component Side)	(Conductor Side)	*
Q6100	A-4	-
Q6101	A-4	-
Q6400	B-4	-
Q6401	B-4	②
Q6402	B-3	②
Q6403	B-3	②
Q6404	B-3	②
Q6500	A-4	-
Q6501	B-4	-
Q6502	B-4	-
Q6503	B-4	②
Q6504	A-4	②


  

DIODE		
(Component Side)	(Conductor Side)	*
D6000	A-2	-
D6001	B-2	-
D6002	B-2	③
D6102	A-4	③

KLV-S19A10/S23A10 (UC) 4-24




(4) Schematic Diagram of H1 and H2 Boards (H2:KLV-S23A10 Only)

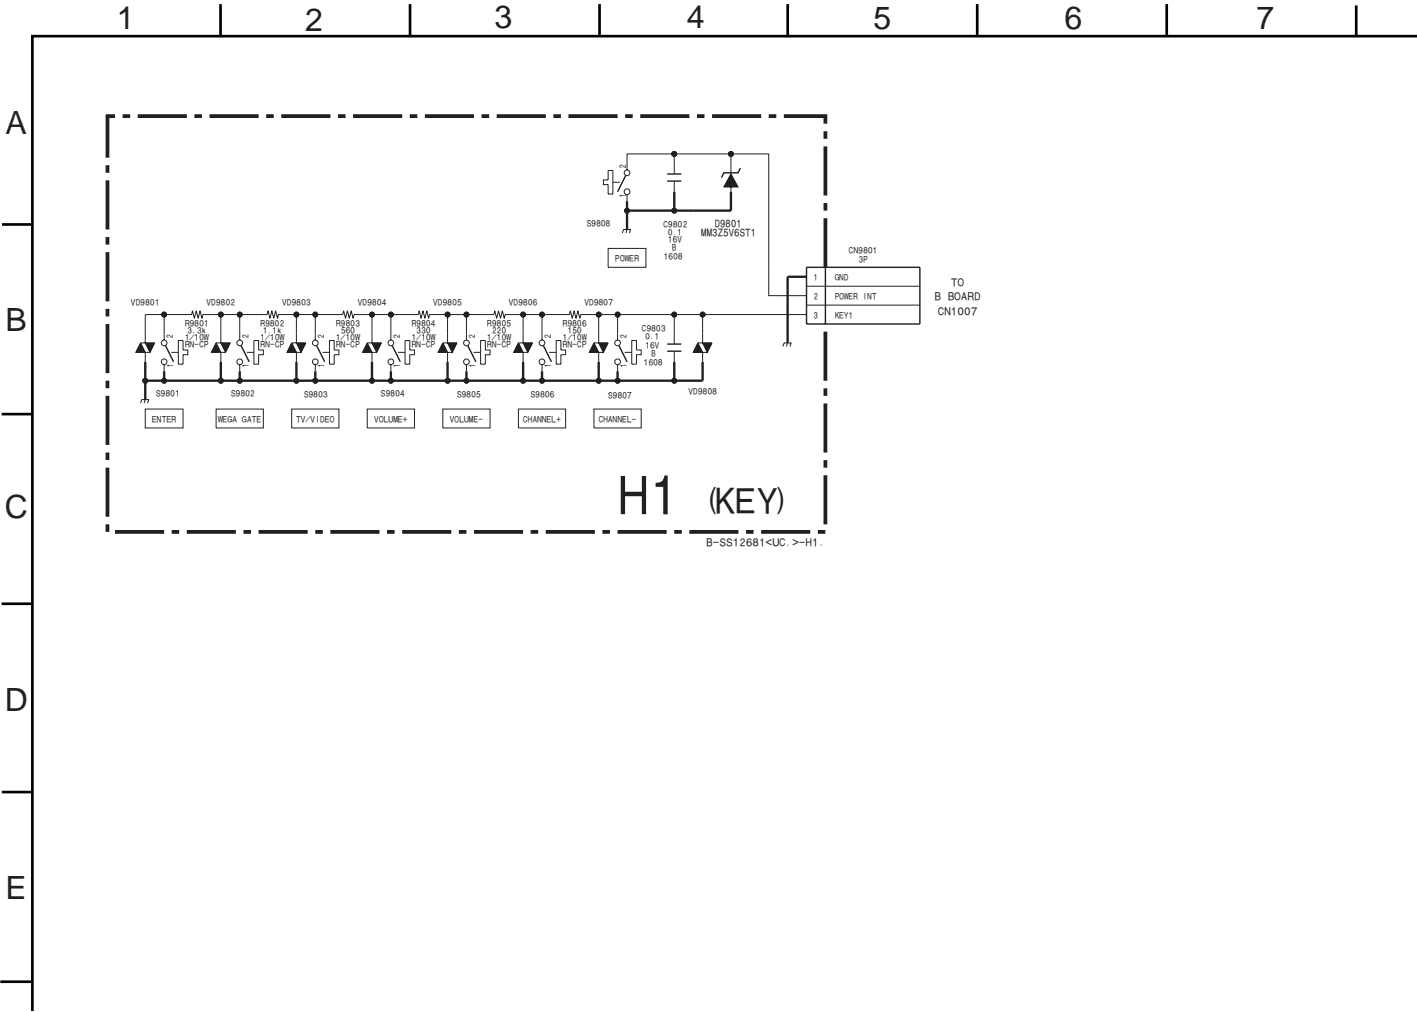


**H1** [KEY]

— H1 BOARD —

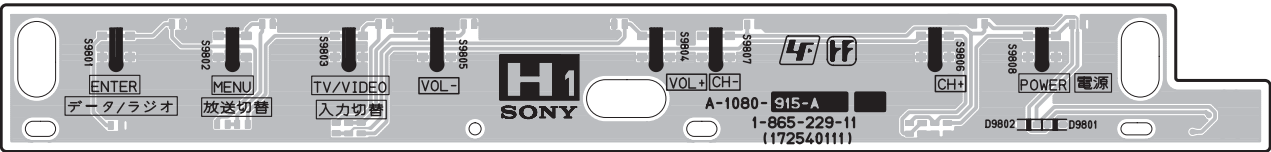

<COMPONENT SIDE>

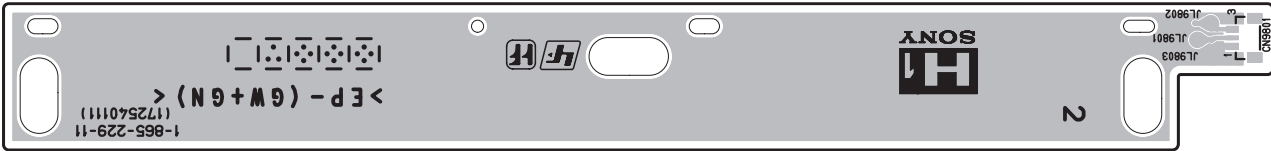


<CONDUCTOR SIDE>

• H1 BOARD SEMICONDUCTOR LOCATION


Ref.	*
D9801	③

※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-10)

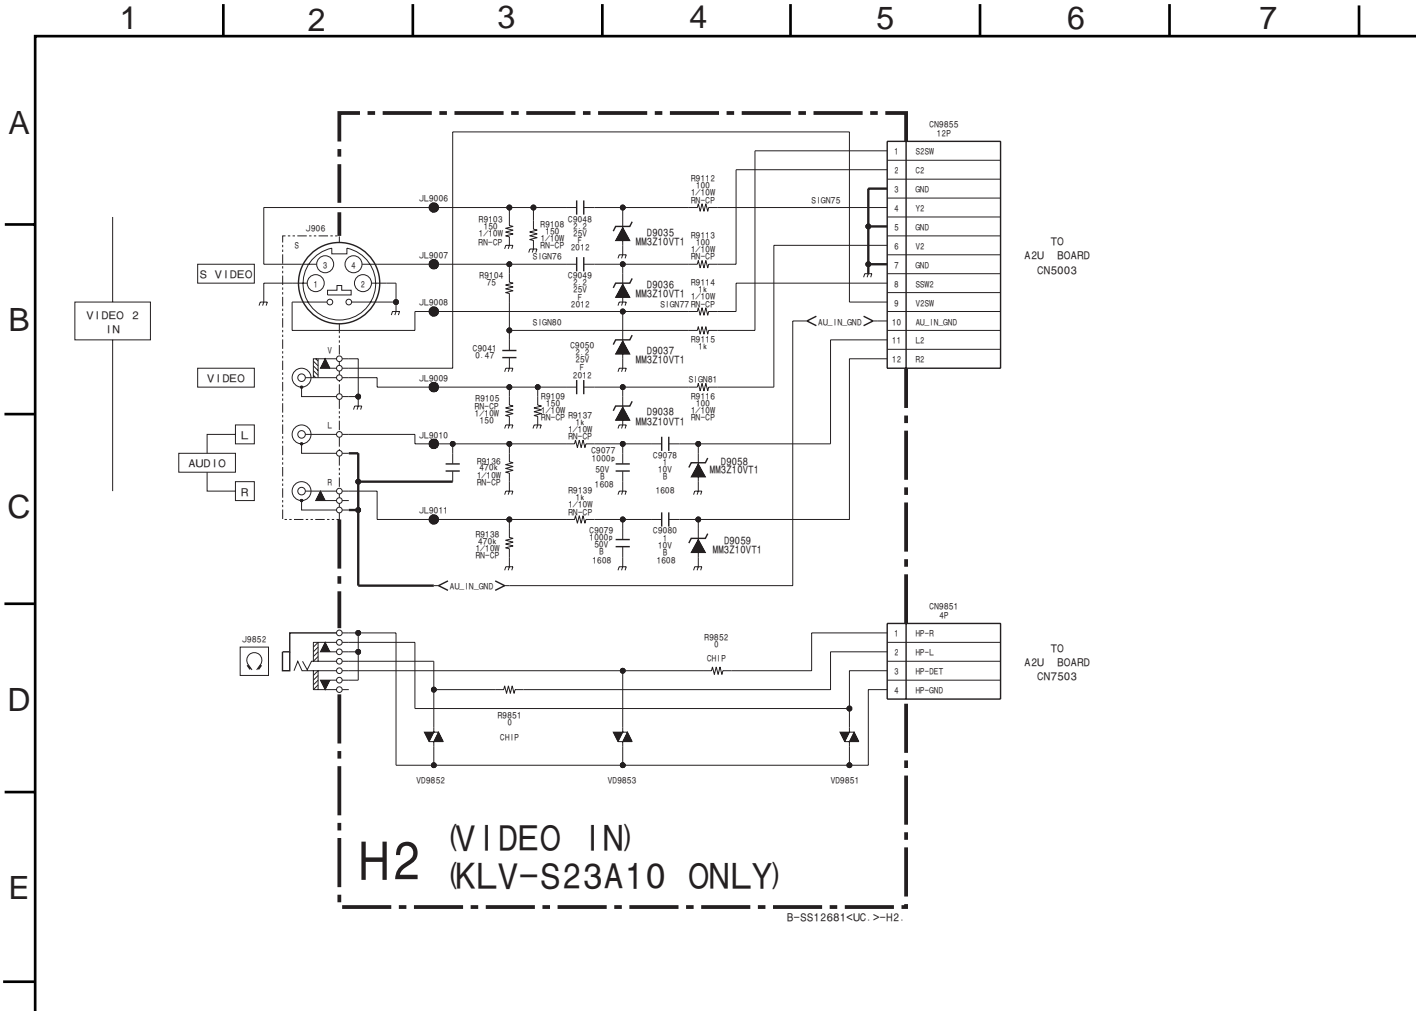


**H2** [VIDEO IN]

— H2 BOARD —

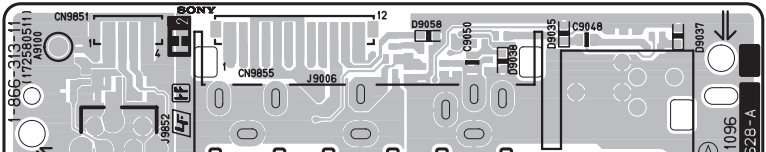

<COMPONENT SIDE>

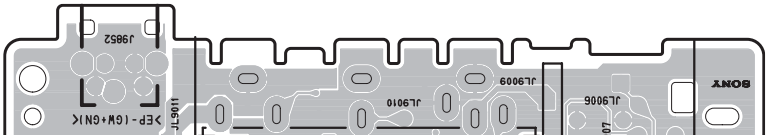


<CONDUCTOR SIDE>

• H2 BOARD SEMICONDUCTOR LOCATION

Ref.	*
D9035-D9038, D9058, D9059	③


※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-10)

(5) Schematic Diagram of H3 Board

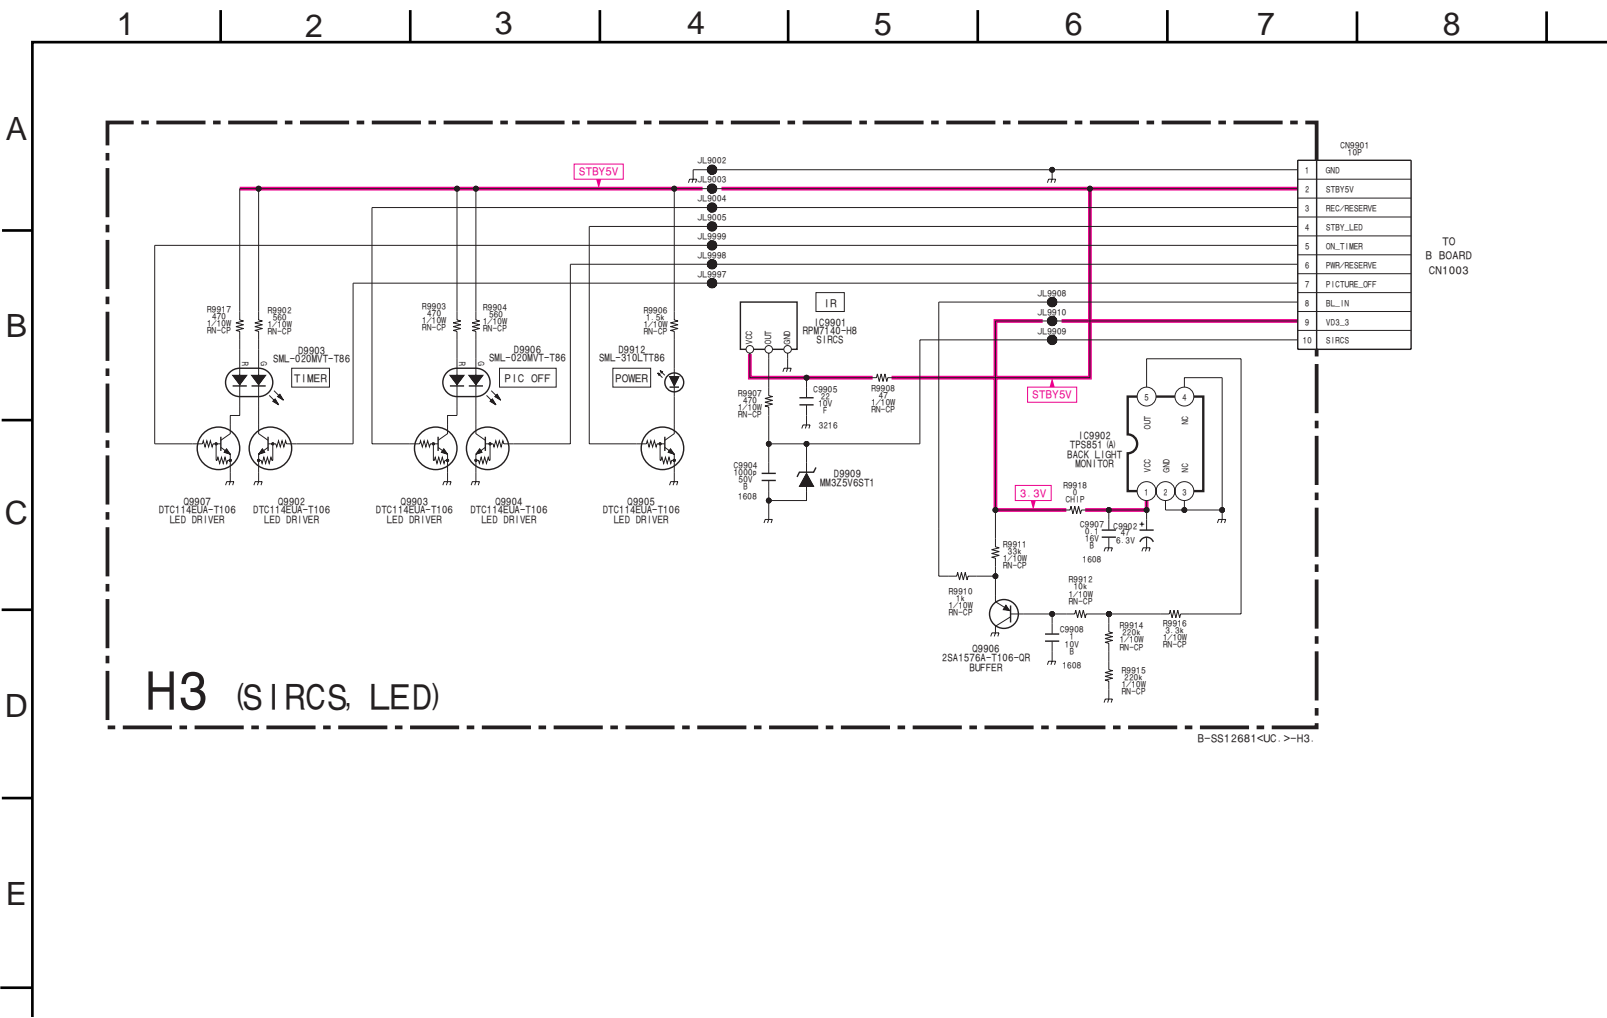


**H3** [SIRCS, LED]  
(KLV-S19A10)

— H3 BOARD —

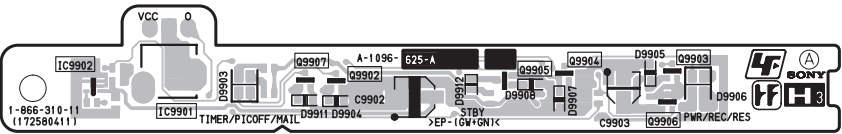

<COMPONENT SIDE>

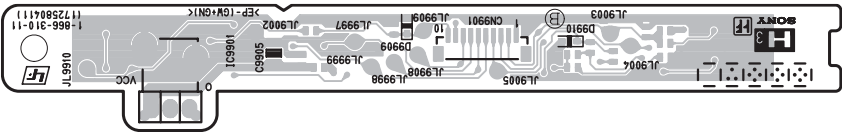

<CONDUCTOR SIDE>


• H3(KLV-S19A10) BOARD SEMICONDUCTOR LOCATION

Ref.	*
Q9902-Q9907	②
D9903, D9906, D9909, D9912	③


※: Refer to Terminal name of semiconductors in  
silk screen printed circuit (see page 4-10)

**H3** [SIRCS, LED]  
(KLV-S23A10)

— H3 BOARD —

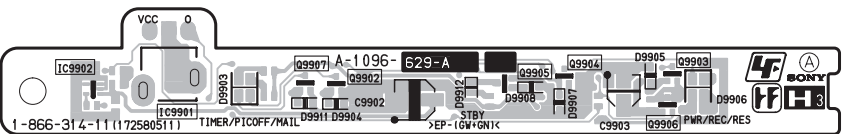

<COMPONENT SIDE>

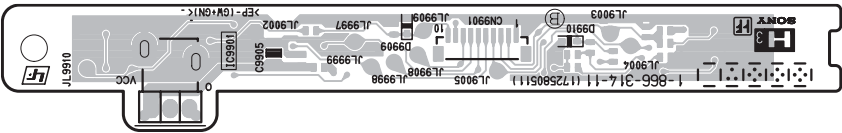


<CONDUCTOR SIDE>

• H3(KLV-S23A10) BOARD SEMICONDUCTOR LOCATION

Ref.	*
Q9902-Q9907	②
D9903, D9906, D9909, D9912	③


※: Refer to Terminal name of semiconductors in  
silk screen printed circuit (see page 4-10)

(6) Schematic Diagram of TU Board

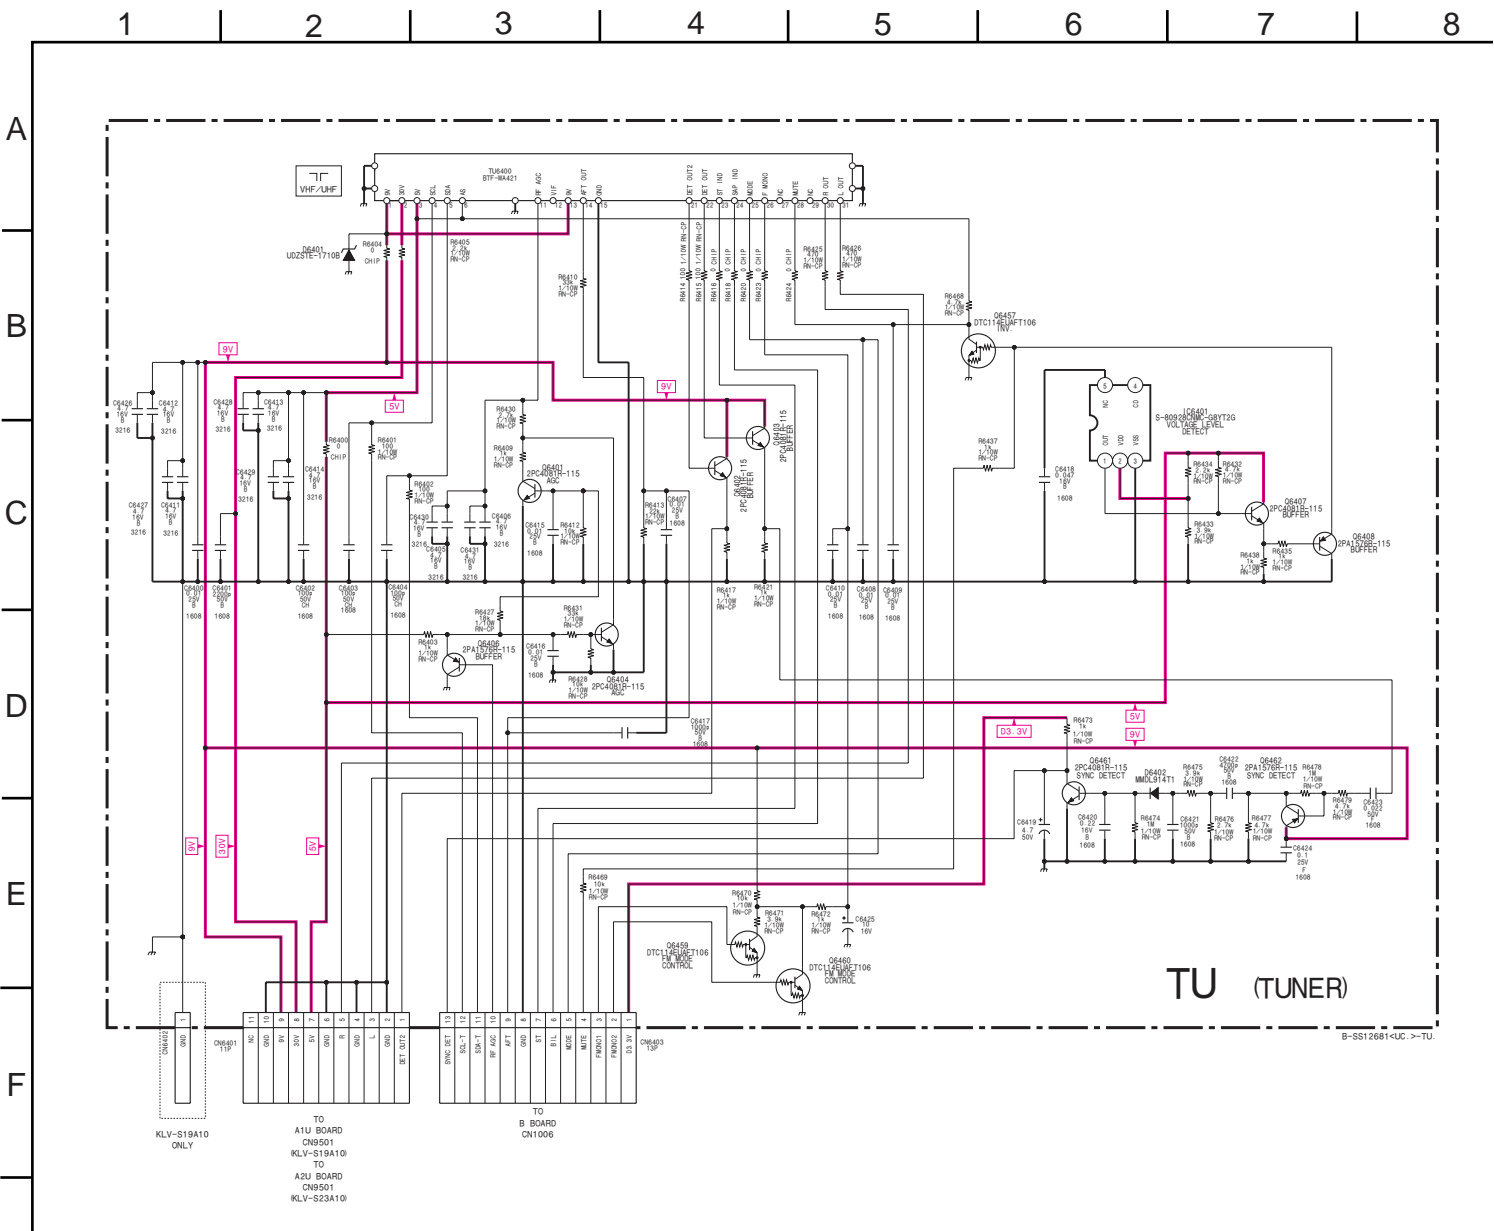


**TU** [TUNER]  
(KLV-S19A10)

— TU BOARD —

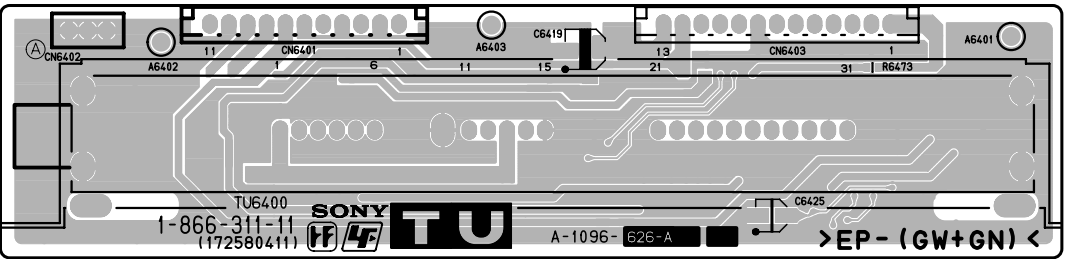

<COMPONENT SIDE>

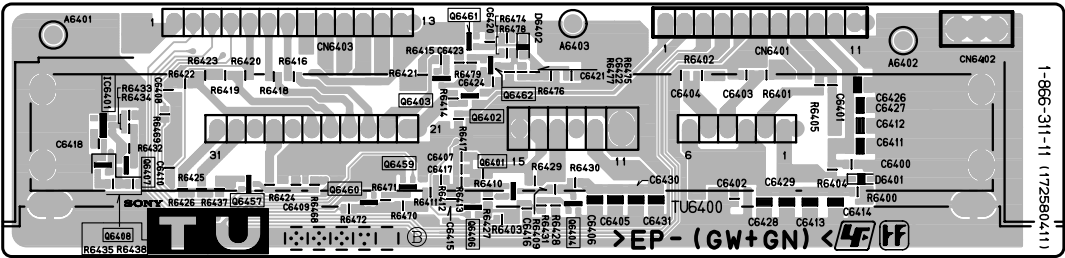


<CONDUCTOR SIDE>

• TU(KLV-S19A10) BOARD SEMICONDUCTOR LOCATION


Ref.	*
Q6401-Q6404, Q6406-Q6408, Q6457, Q6459- Q6462	②
D6401, D6402	③

**TU** [TUNER]  
(KLV-S23A10)

— TU BOARD —

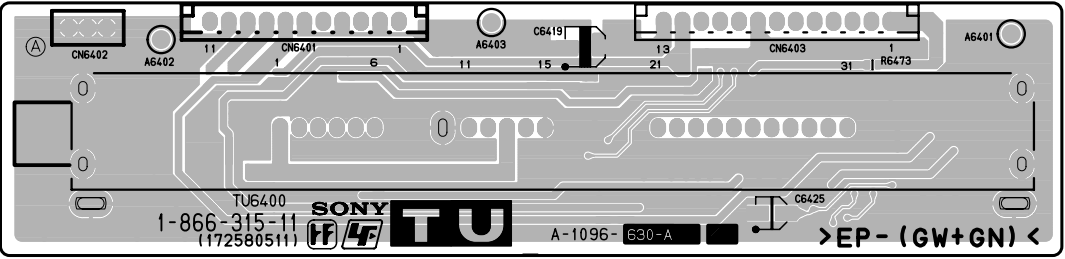

<COMPONENT SIDE>

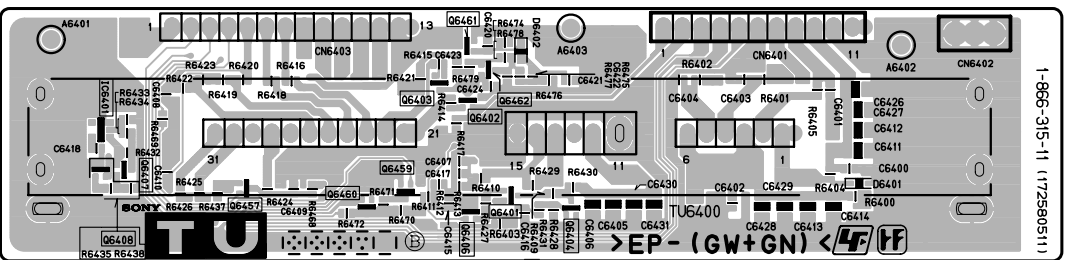


<CONDUCTOR SIDE>


• TU(KLV-S23A10) BOARD SEMICONDUCTOR LOCATION

Ref.	*
Q6401-Q6404, Q6406-Q6408, Q6457, Q6459- Q6462	②
D6401, D6402	③


※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-10)

(7) Schematic Diagram of P Board

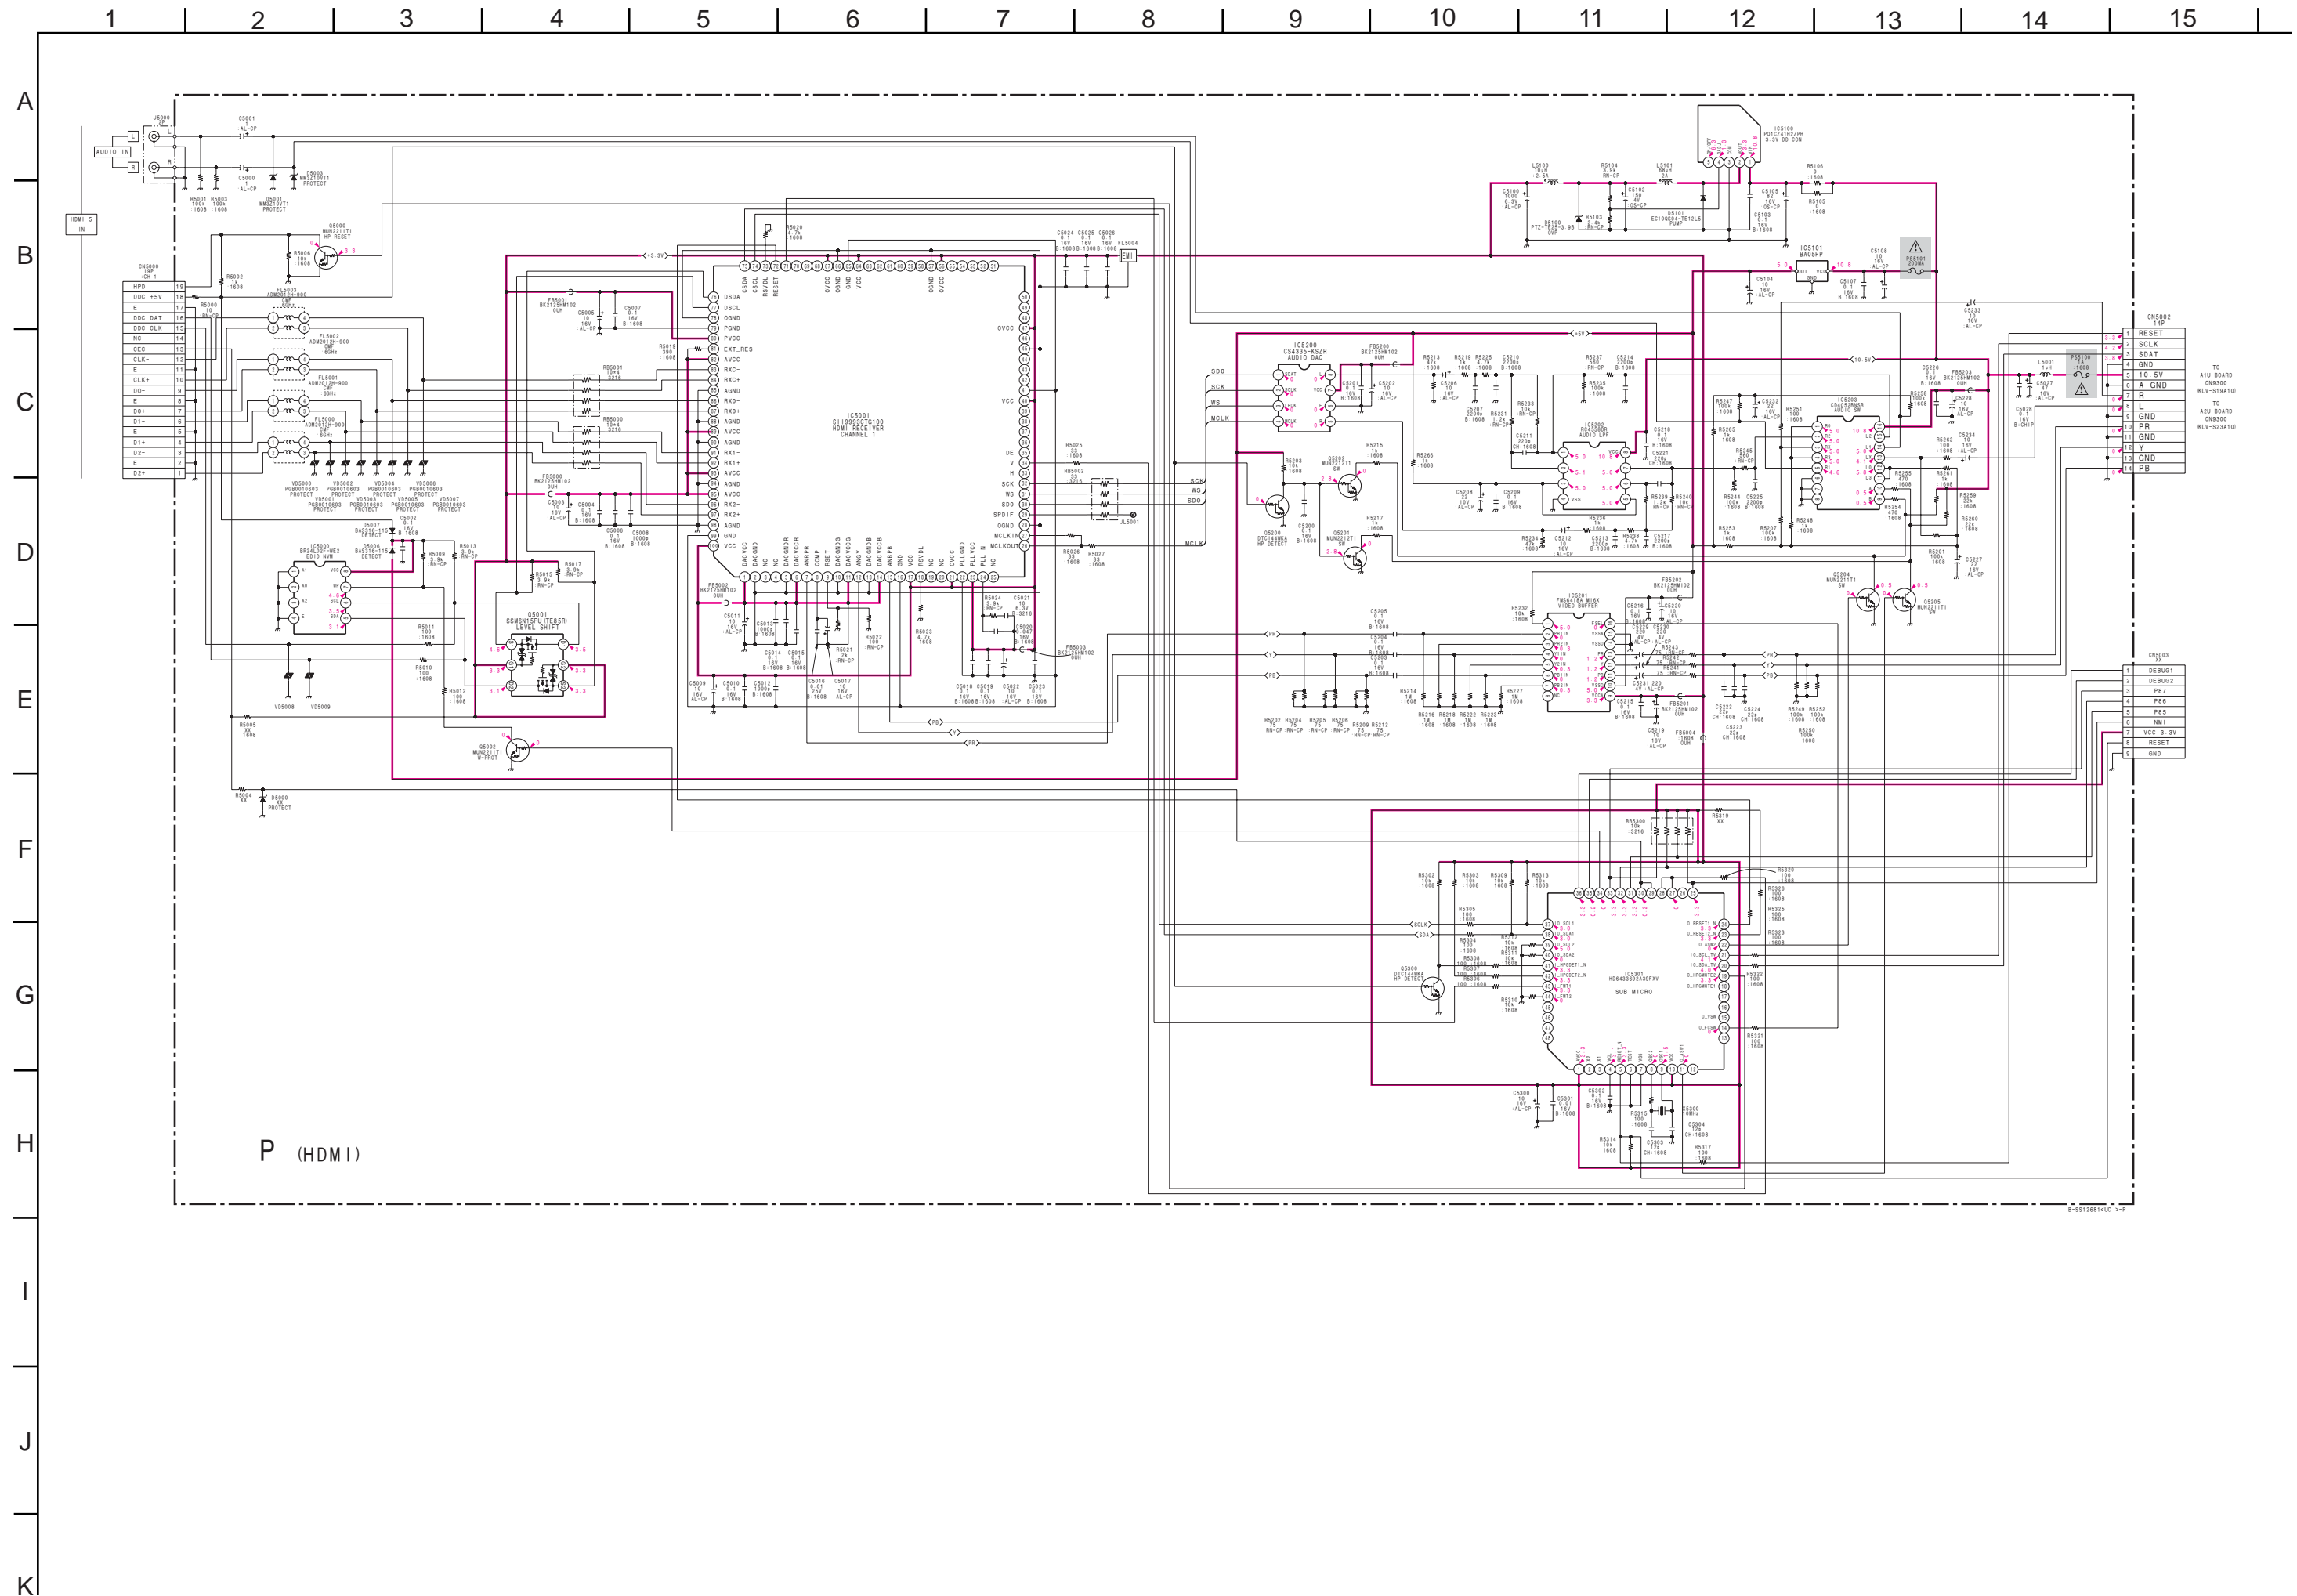

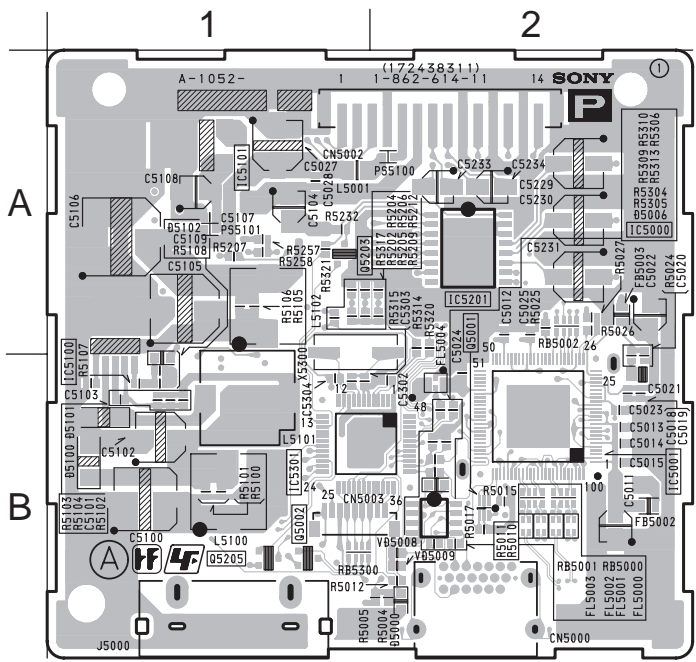

<COMPONENT SIDE>

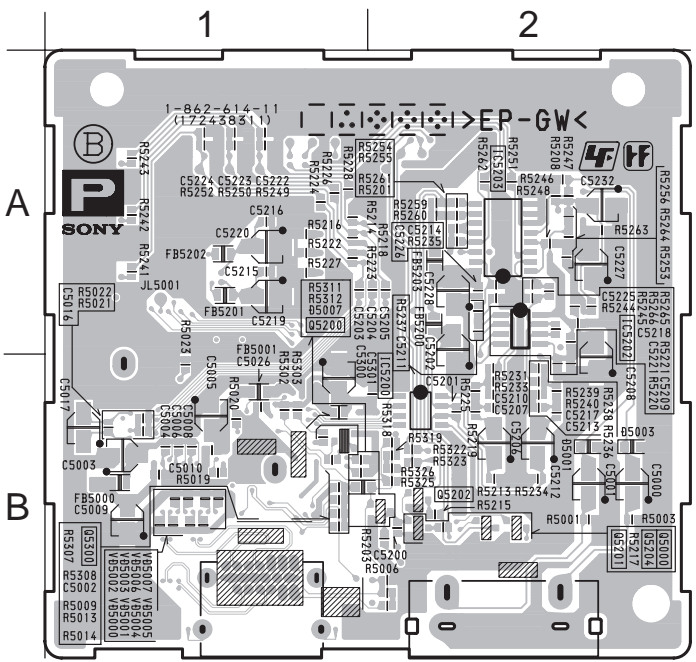

<CONDUCTOR SIDE>

• P BOARD SEMICONDUCTOR LOCATION

IC			
(Component Side)	(Conductor Side)		
IC5000	B-2	Q5201	B-2 ②
IC5001	B-2	Q5202	B-2 ②
IC5100	A-1	Q5204	B-2 ②
IC5101	A-1	Q5205	B-1 ②
IC5200	B-2	Q5300	B-1 ②
IC5201	A-2	DIODE	
IC5202	A-2	(Component Side)	(Conductor Side) *
IC5203	A-2	D5000	B-2 ③
IC5301	B-1	D5001	B-2 ③
TRANSISTOR		D5003	B-2 ③
(Component Side)	(Conductor Side) *	D5006	B-2 ③
Q5000	B-2 ②	D5007	B-1 ③
Q5001	B-2	D5100	B-1 ③
Q5002	B-1 ②	D5101	B-1 ③
Q5200	B-2 ②	D5102	B-1 ③


※: Refer to Terminal name of semiconductors in silk screen printed circuit (see page 4-10)




4-5. SEMICONDUCTORS

IC

BA00AST-V5




BA05FP-E2  
BA09FP-E2  
S-1111B33MC-NYSTFG  
S-80928CNMC-G8YT2G  
TC7SZ125FU(TE85R)




5Pin CHIP

BA18BC0FP-E2  
BA25BC0FP-E2




BR24L02F-WE2  
CS4335-KSZR  
FA5501N-TE1  
LM75CIMX-3  
M24128-BWMN6T(A)  
M24C02-WMN6T(B)  
NJM2521V(TE2)  
NJM3414AV(TE2)  
RC4558DR  
RC4558PWR




8Pin SOP

CD4052BNSR  
FMS6418AM16X




16Pin SOP

CXA2188Q-T4




40Pin QFP

EM6A9320BI-5MG




144Pin PGA

HD6433692A39FXV  
HD64F3694FXV-DA4  
TPA3004D2PHPR




48Pin QFP

HD64F2378-12681-01




144Pin QFP

L88M05T-FA-TL



M52347FP-TE




20Pin SOP


MM1431ATT




NJW1149AFH1




PQ1CY1032ZP




PQ1CZ41H2ZPH



RV5C387A-E2-FB




SII9993CTG100



100Pin QFP

SN74LV132APWR  
SN74LVC14APWR




14Pin SOP

STR-A6169



8Pin DIP


TK11819MTL




6Pin CHIP

TRANSISTOR


DTC114EU  
DTC114EUAFT106




DTC114EUA-T106  
DTC115EUA-T106  
DTC144WKA-T146  
DTC314TK-T-146  
DTC323TK  
DTC323TKT146  
MUN2211T1  
MUN2212T1  
MUN5213T1  
PDTC114EK-115  
UN2211  
2PA1576R-115  
2PC4081R-115  
2PD601AR-115  
2SA1037AK-T146-QR  
2SA1037AK-T146-R  
2SA1576A-T106-QR  
2SA1774R  
2SA1774TL-QR  
2SC1623-L5L6  
2SC2412K-T-146-QR  
2SC4081-R  
2SC4081T106R  
2SC4617R  
2SC4617TL-QR  
2SD2114K  
2SD601A-Q-TX




FDS6690A




HN1B01FU-TE85R




SSM6N15FU(TE85R)



2SB1122-S  
2SB1122-ST-TD-E  
2SD1621-ST  
2SD1621ST-TD-E



2SD2114KT146




2SK2158-T2B




DIODE


BAS316-115  
EP05FA20  
MM3Z10VT1  
MM3Z11VT1  
MM3Z13VT1  
MM3Z18VST1  
MM3Z22VT1  
MM3Z2V4T1  
MM3Z5V6ST1  
MM3Z6V8ST1  
MM3Z8V2ST1




BAT54HT1  
DTZ10B  
HZU5.6GTRF  
MA113-(TX)  
MMDL914T1  
RD5.6SB-T1  
UDZ-TE-17-18B  
UDZ-TE-17-6.2B  
UDZ-TE-17-6.8B




D10SBS4  
D10SBS4F  
D2SB60A-F04  
D4SB60L



D10SC6M




D1NL40-TA2  
D1NL40-TR2  
ERA22-08




D1NS6  
D1NS6-TR  
ERA22-06AVRBT  
UF4005PKG23  
10ERB20-TB3  
1N5404TU



EC10QS-04  
EC10QS04-TE12L5




EC21QS03L-TE12L  
P6SMBJ30A-5  
PTZ-TE25-3.9B




ERA22-08KFLB




FSF05A60




HN1D03FU-TE85L  
HN1D03FU-TE85R




M1FM3




MA132WK  
MA132WK-TX  
MA151WK-TX  
1SS184




UDZSTE-1710B




UMZ16NT106




1PS302



SML-020MVT-T86



SML-310LTT86



## SECTION 5

### EXPLODED VIEWS

#### NOTE:

The components identified ⚠ marked are critical for safety.  
Replace only with the part number specified.


Les composants identifiés par la marque ⚠ sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.



## 5-1. KLV-S19A10


### 5-1-1. REAR CABINET ASSY AND STAND ASSY

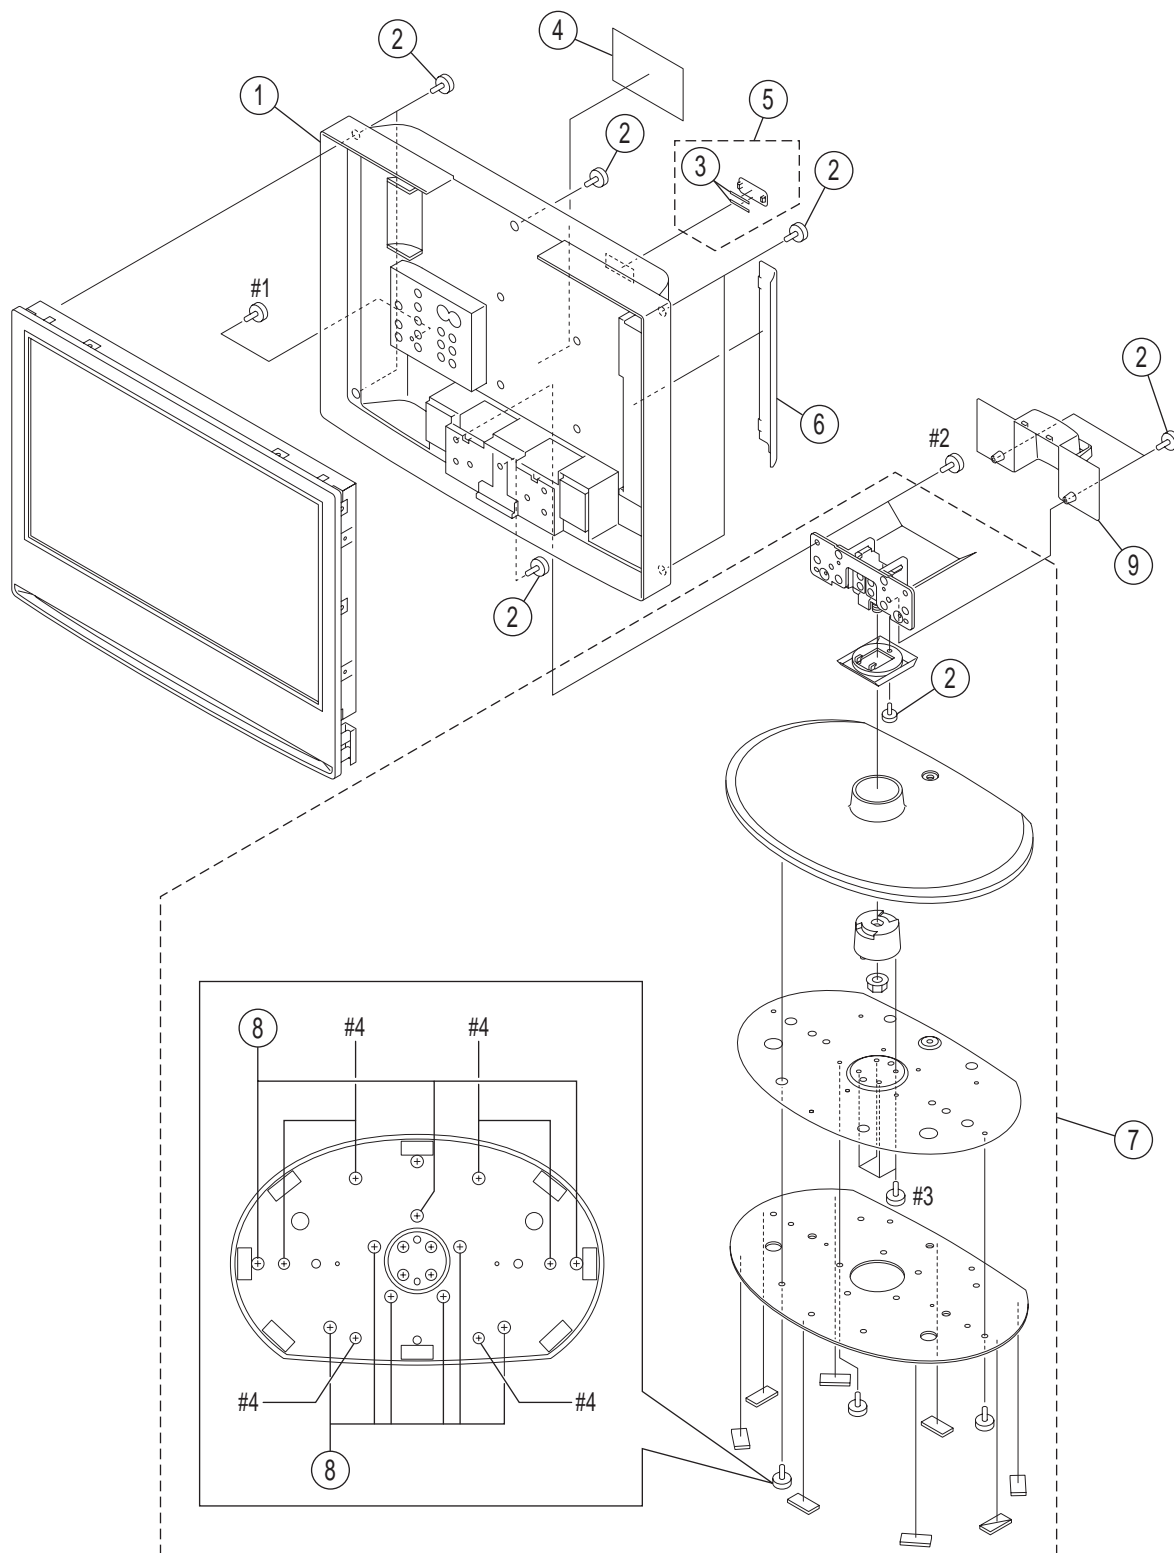

REF. No.	PART No.	DESCRIPTIONRE	MARK
1	X-2050-886-1	CABINET REAR ASSY (19U)	
2	2-320-333-01	SCREW +B M4X6	
3	4-660-752-01	TAPE (LCD)	
4	* 2-548-454-01	LABEL, INFORMATION (U)	
5	X-2055-564-1	ECS COVER ASSY	3
6	X-2055-565-1	JACK COVER (S) ASSY	
7	X-2025-222-3	STAND ASSY (S)	2,8
8	2-102-561-02	SCREW +K M5X8	
9	2-584-340-01	COVER, HINGE (19)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#1	7-685-647-79	SCREW +BVTP 3X10 TYPE2 IT-3	
#2	7-682-663-09	SCREW +PSW 4X12	
#3	7-682-963-09	SCREW +PSW 4X12	
#4	7-685-259-19	SCREW +KTP 4X8 TYPE2 NON-SLIT	


**KLV-S19A10**  
**5-1-2. CHASSIS-1**

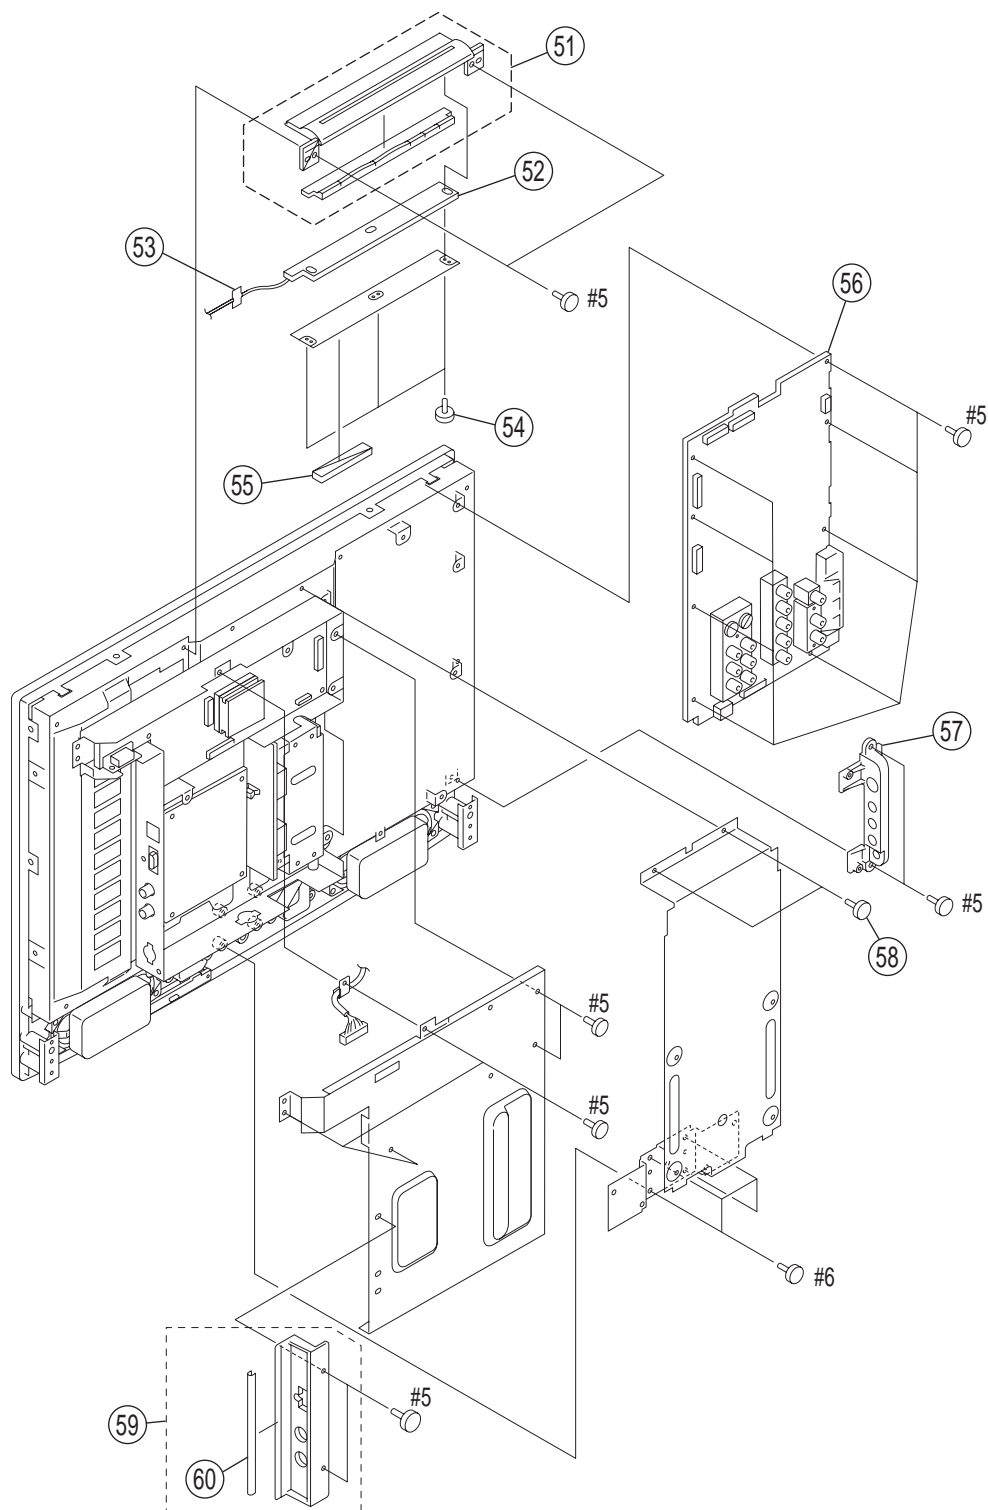

REF. No.	PART No.	DESCRIPTIONRE	MARK
51	X-2050-816-1	BUTTON, MULTI ASSY (19U)	
52	* A-1080-915-A	H1 MOUNT	
53	4-660-752-01	TAPE (LCD)	
54	4-908-792-41	SCREW (B2)	
55	* 4-082-873-01	GASKET (2X4)	
56	* A-1096-624-A	A1U MOUNT	
57	X-2050-882-1	HOLDER SIDE JACK ASSY	
58	2-320-333-01	SCREW +B M4X6	
59	X-2055-266-1	BRACKET SIDE ASSY (U)	60
60	4-099-816-11	TAPE (SP C2)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#5	7-685-871-01	SCREW +BVTT 3X6 (S)	
#6	7-685-661-79	SCREW +BVTP 4X12 TYPE2 N-S	


**KLVS19A10**  
**5-1-3. CHASSIS-2**

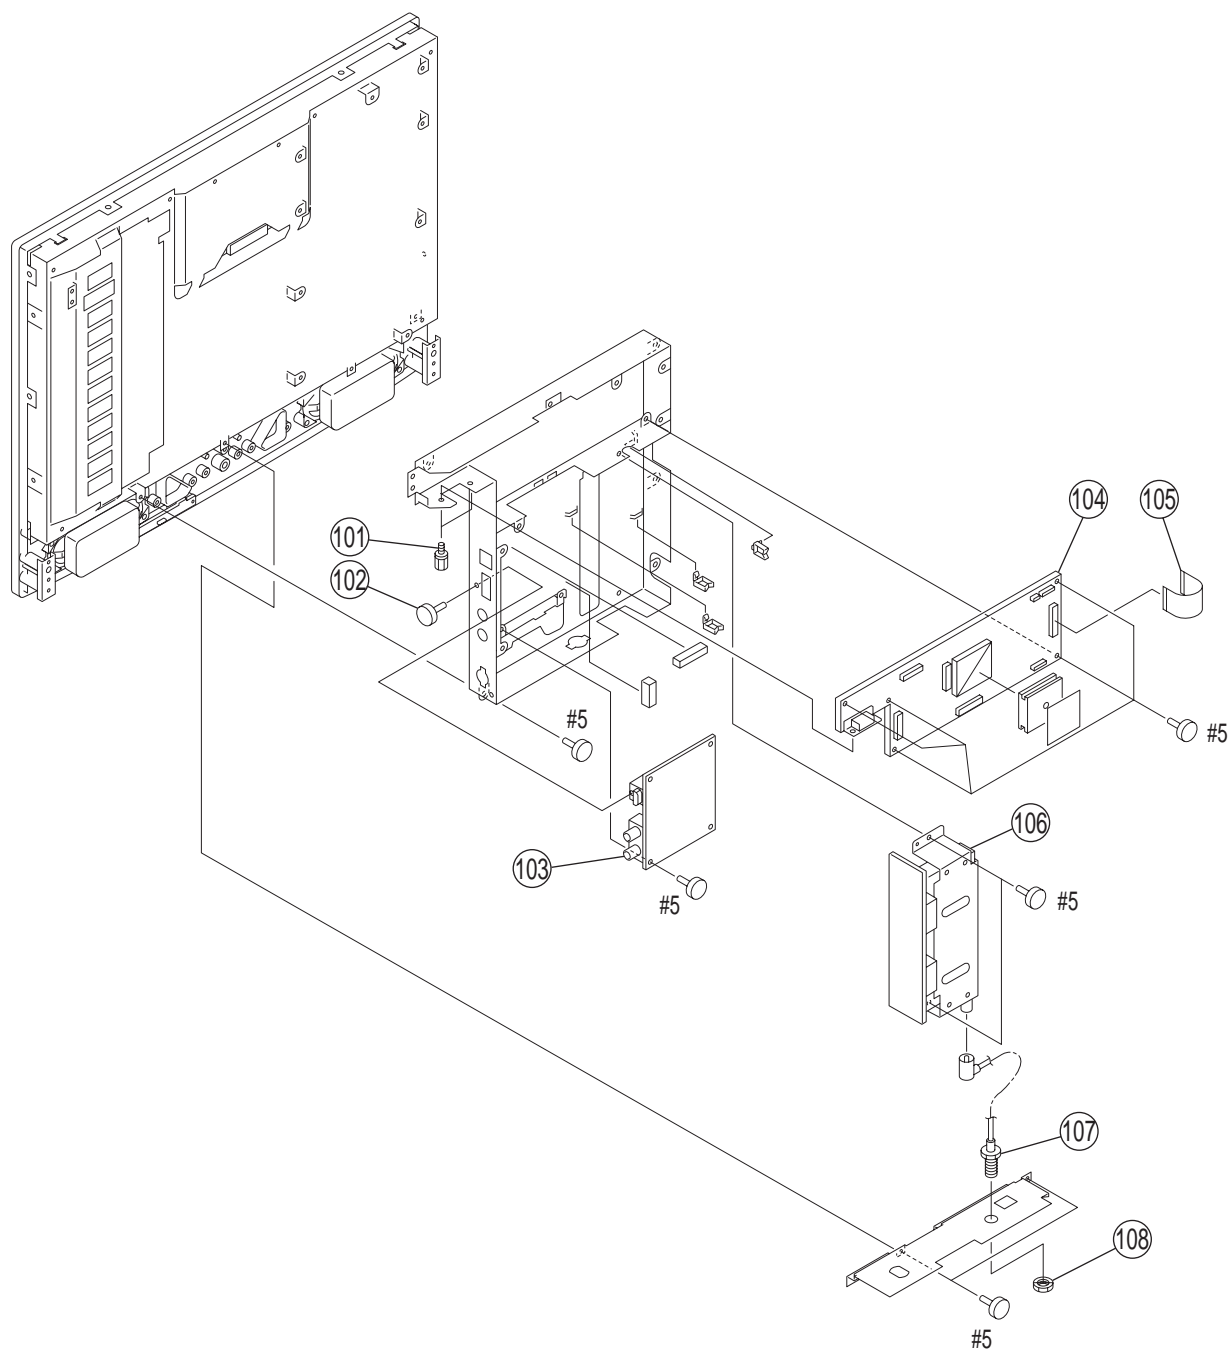

REF. No.	PART No.	DESCRIPTIONRE	MARK
101	4-635-966-01	SCREW (HEX)	
102	2-588-756-01	SCREW +B 3X4 WITH SCOTCHGRIP	
103	* A-1052-776-A	P MOUNT	
104	* A-1107-289-A	B MOUNT (NVM)	
105	1-910-012-88	CONNECTOR ASSY 50P	

REF. No.	PART No.	DESCRIPTIONRE	MARK
106	* A-1096-626-A	TU MOUNT	
107	1-827-467-41	CORD, CONNECTION	
108	3-682-691-00	NUT, WASHER HEXAGON	
#5	7-685-871-01	SCREW +BVTT 3X6 (S)	


**KLVS19A10**  
**5-1-4. CHASSIS-3**

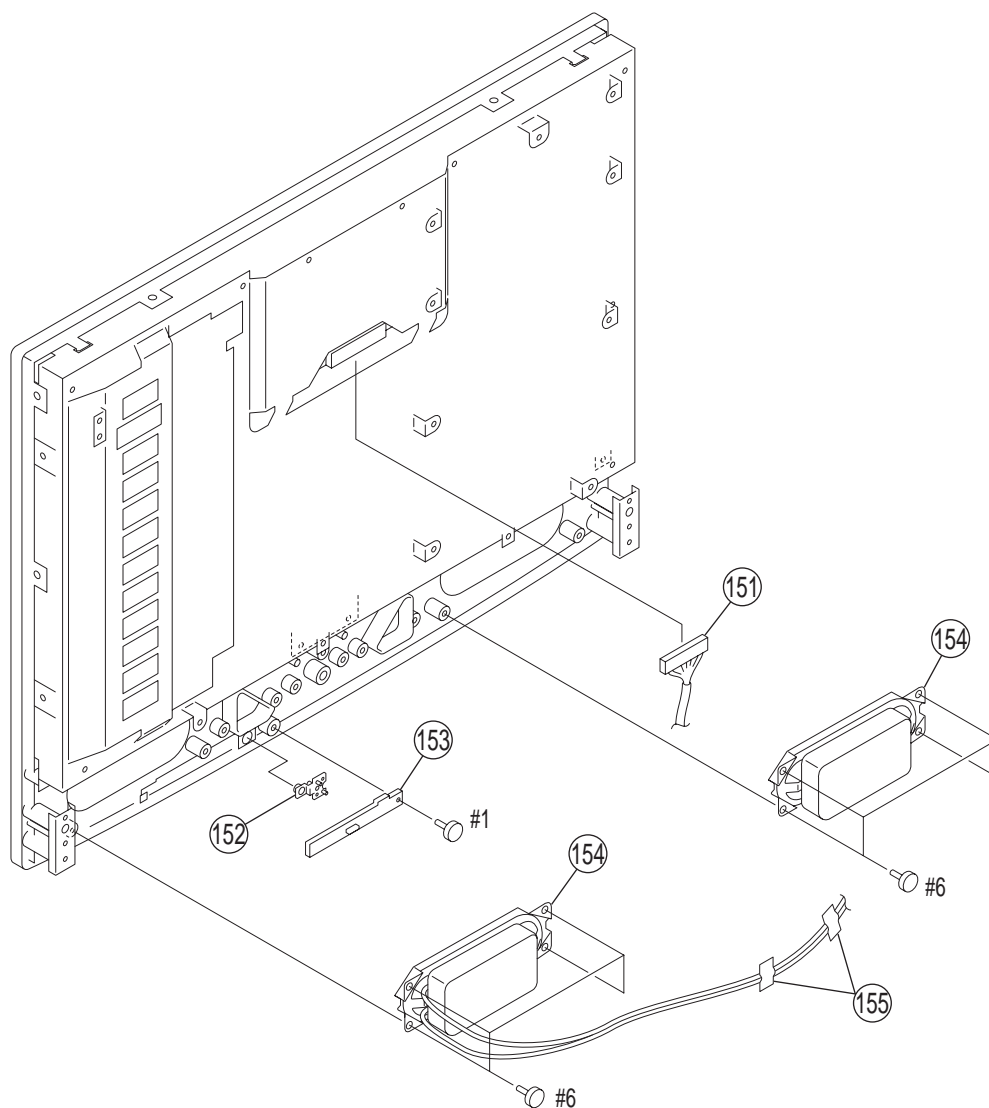

REF. No.	PART No.	DESCRIPTIONRE	MARK
151	1-830-355-11	HARNESS WITH CONNECTOR (LVDS)	
152	* 2-515-684-01	GUIDE, LIGHT SENSOR	
153	* A-1096-625-A	H3 MOUNT	
154	1-826-062-11	LOUDSPEAKER (4X10CM)	
155	4-660-752-01	TAPE (LCD)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#1	7-685-647-79	SCREW +BVTP 3X10 TYPE2 IT-3	
#6	7-685-661-79	SCREW +BVTP 4X12 TYPE2 N-S	


**KLV-S19A10**  
**5-1-5. LCD PANEL**

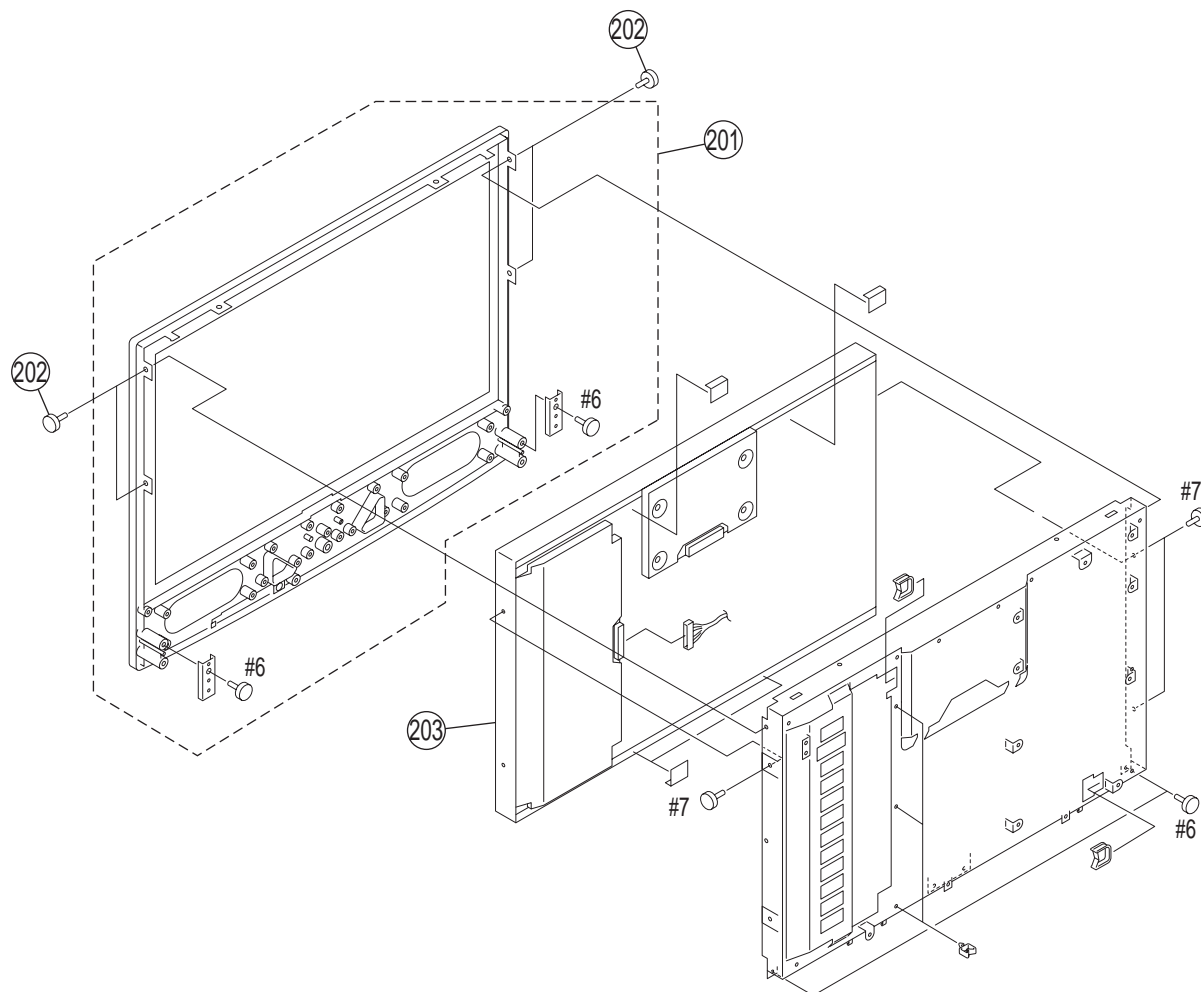

REF. No.	PART No.	DESCRIPTIONRE	MARK
201	X-2050-210-1	BEZEL ASSY (19U)	
202	2-588-756-01	SCREW +B 3X4WITH SCOTCHGRIP	
203	1-805-802-11	LCD PANEL (19INCH WXGA TFT)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#6	7-685-661-79	SCREW +BVTP 4X12 TYPE2 N-S	
#7	7-682-948-01	SCREW +PSW 3X8	

# **KLV-S19A10** **5-1-6. PACKING MATERIALS**

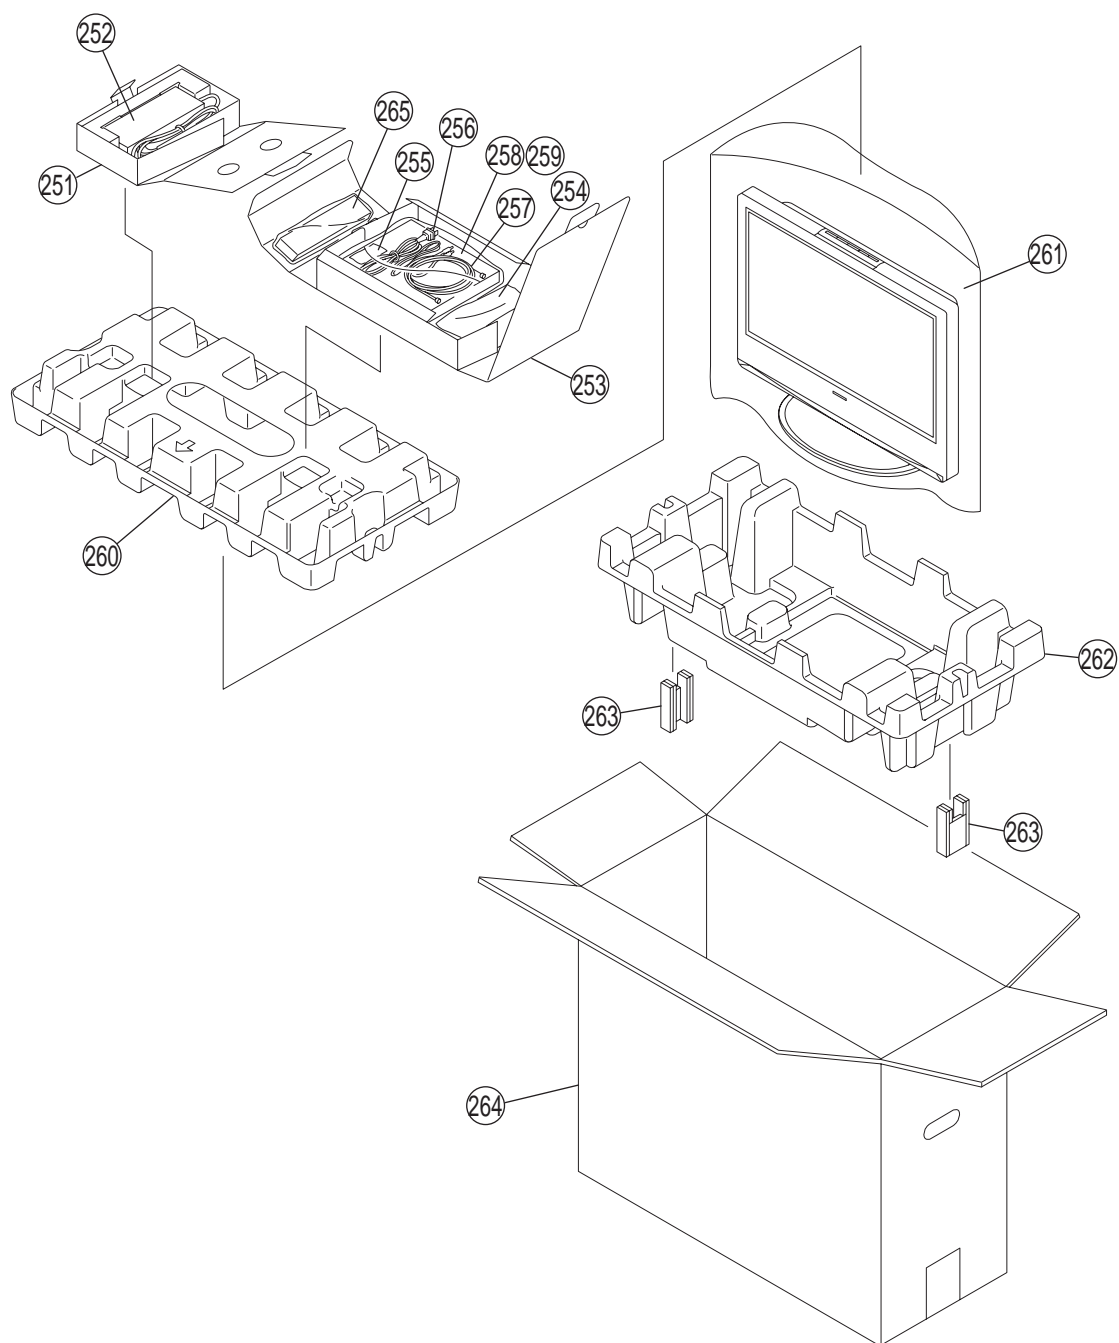


REF. No.	PART No.	DESCRIPTIONRE	MARK
251	* 2-584-249-02	BOX, ADAPTER	
252	△ 1-479-235-11	D.C. POWER SUPPLY	
253	* 2-548-159-01	BOX, ACCESSORY	
254	X-2055-287-2	BAG ASSY, RUDDER LOCK	
255	7-621-853-30	SCREW,WOOD +R 3.1X13	
256	1-790-107-22	CORD, POWER	
257	1-757-319-52	CABLE, COAXIAL (WITH (F) PLUG)	
258	2-589-826-11	MANUAL,INSTRUCTION (UC)	
	2-589-826-21	MANUAL,INSTRUCTION (FR)	
	2-589-826-31	MANUAL,INSTRUCTION (ES)	
259	2-589-827-11	GUIDE,QUICK SETUP (UC)	
	2-589-827-21	GUIDE,QUICK SETUP (FR)	
	2-589-827-31	GUIDE,QUICK SETUP (ES)	
260	* 2-548-157-01	CUSHION UPPER	

REF. No.	PART No.	DESCRIPTIONRE	MARK
261	2-629-958-01	BAG, PROTECTION	
262	* 2-548-158-02	CUSHION LOWER	
263	* 2-591-461-01	REINFORCEMENT (SIDE)	
264	* 2-589-825-01	INDIVIDUAL CARTON	
265	1-479-278-11	REMOTE COMMANDER (RM-YA001)	

## 5-2. KLV-S23A10


### 5-2-1. REAR CABINET ASSY AND STAND ASSY

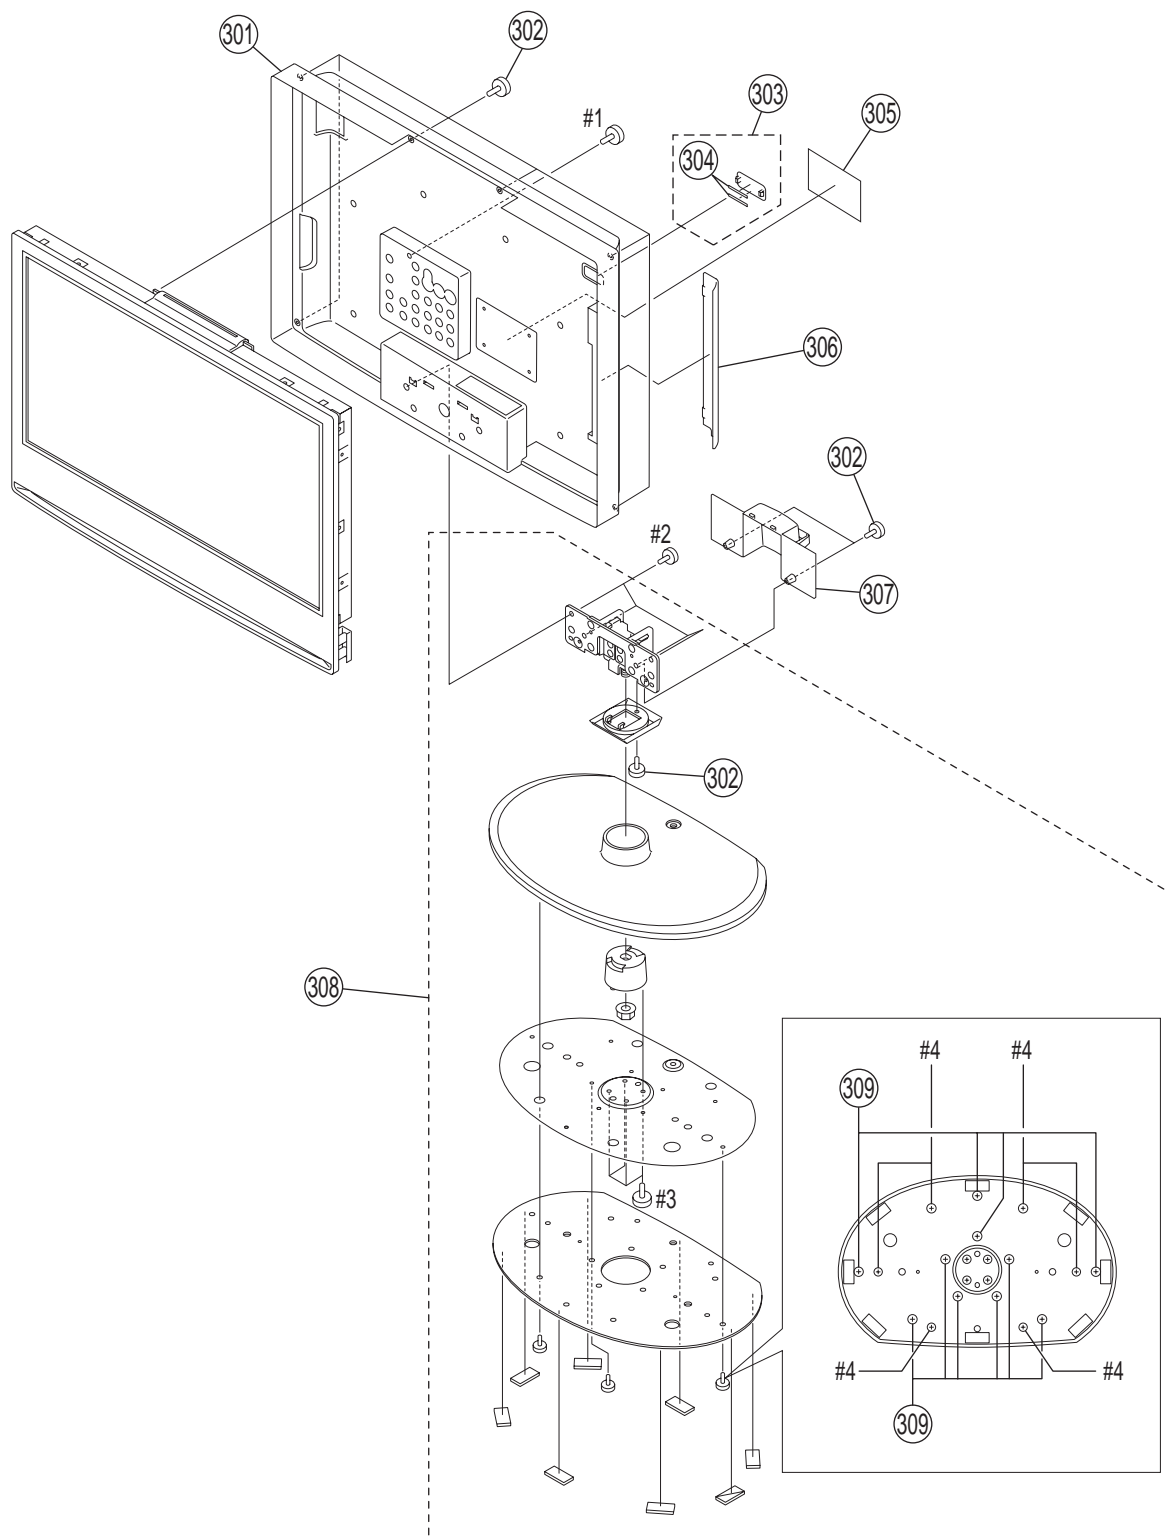

REF. No.	PART No.	DESCRIPTIONRE	MARK
301	X-2050-883-1	CABINET REAR ASSY (23U)	
302	2-320-333-01	SCREW +B M4X6	
303	X-2055-564-1	ECS COVER ASSY	304
304	4-660-752-01	TAPE (LCD)	
305	* 2-548-454-11	LABEL, INFORMATION (U)	
306	X-2055-565-1	JACK COVER (S) ASSY	
307	2-515-688-03	COVER, HINGE (23)	
308	X-2025-222-3	STAND ASSY (S)	302,308
309	2-102-561-02	SCREW +K M5X8	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#1	7-685-647-79	SCREW +BVTP 3X10 TYPE2 IT-3	
#2	7-682-663-09	SCREW +PSW 4X12	
#3	7-682-963-09	SCREW +PSW 4X12	
#4	7-685-259-19	SCREW +KTP 4X8 TYPE2 NON-SLIT	

**KLV-S23A10**  
**5-2-2. CHASSIS-1**

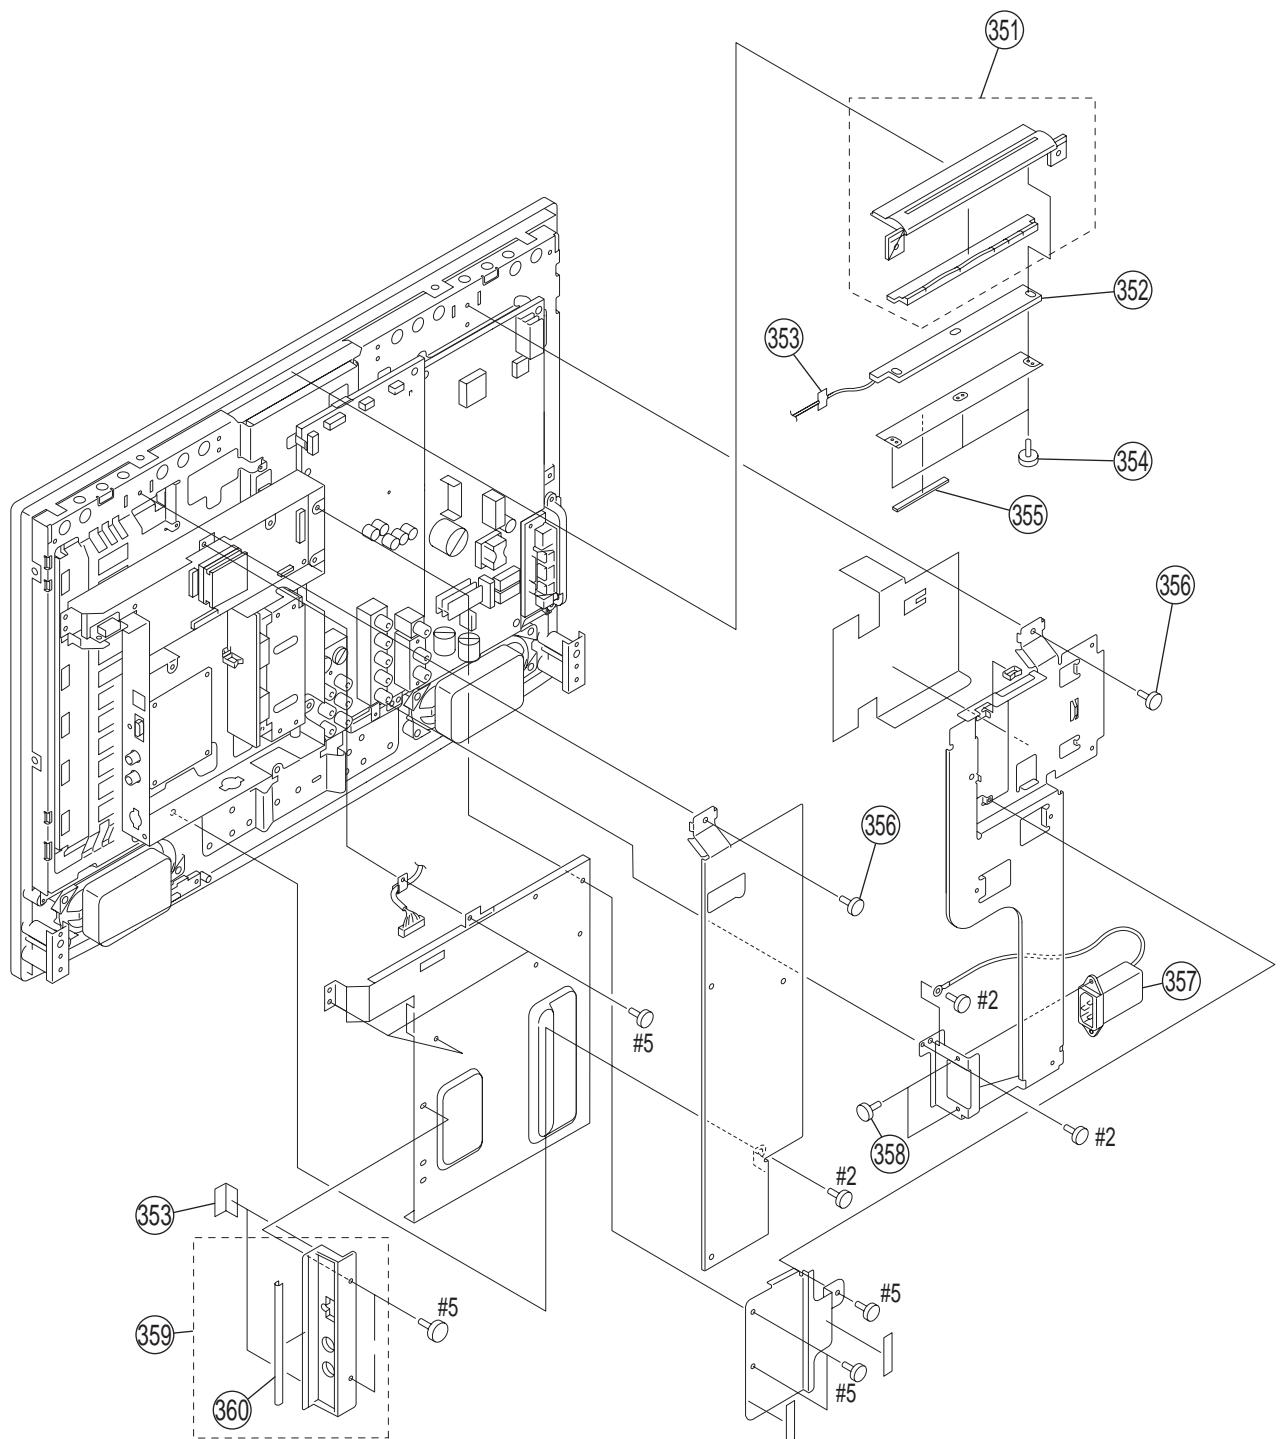


REF. No.	PART No.	DESCRIPTIONRE	MARK
351	X-2050-815-1	ASSY, BUTTON MULTI (23U)	
352	* A-1080-915-A	H1 MOUNT	
353	4-660-752-01	TAPE (LCD)	
354	4-908-792-41	SCREW (B2)	
355	* 4-082-873-01	GASKET (2X4)	
356	2-320-333-01	SCREW +B M4X6	
357	1-251-382-21	INLET, AC 3P(WITH NOISE FILTE)	
358	2-596-649-01	SCREW +KTT 3X10 (S TYPE)	
359	X-2055-266-1	BRACKET SIDE ASSY (U)	360
360	4-099-816-11	TAPE (SP C2)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#2	7-682-663-09	SCREW +PSW 4X12	
#5	7-685-871-01	SCREW +BVTT 3X6 (S)	




**KLVS23A10**  
**5-2-3. CHASSIS-2**

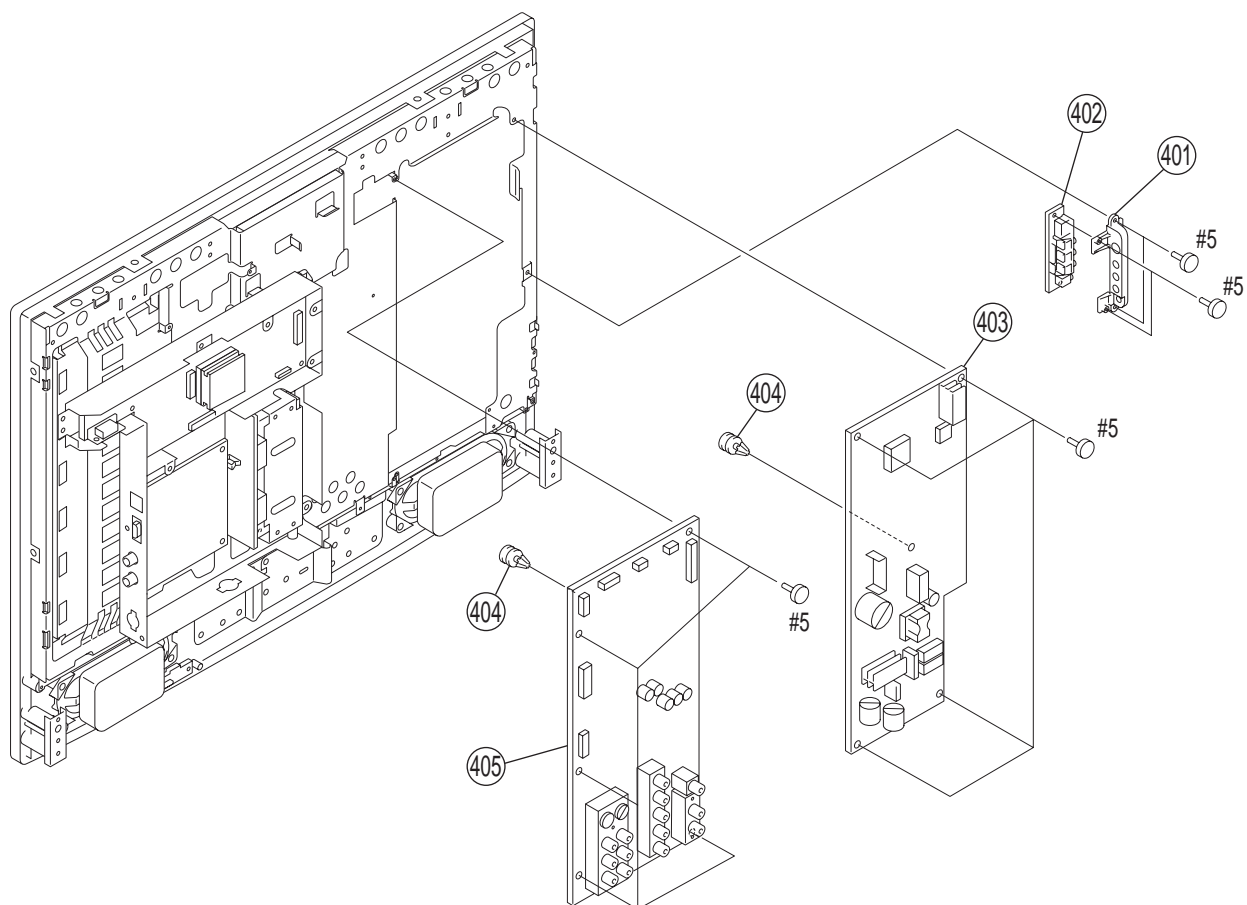

REF. No.	PART No.	DESCRIPTIONRE	MARK
401	X-2050-882-1	HOLDER SIDE JACK ASSY	
402	* A-1096-628-A	H2 MOUNT	
403	* A-1085-893-A	G1 MOUNT	
404	4-056-942-01	SPACER, MINIATURE CARD	
405	* A-1096-627-A	A2U MOUNT	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#5	7-685-871-01	SCREW +BVTT 3X6 (S)	


**KLV-S23A10**  
**5-2-4. CHASSIS-3**

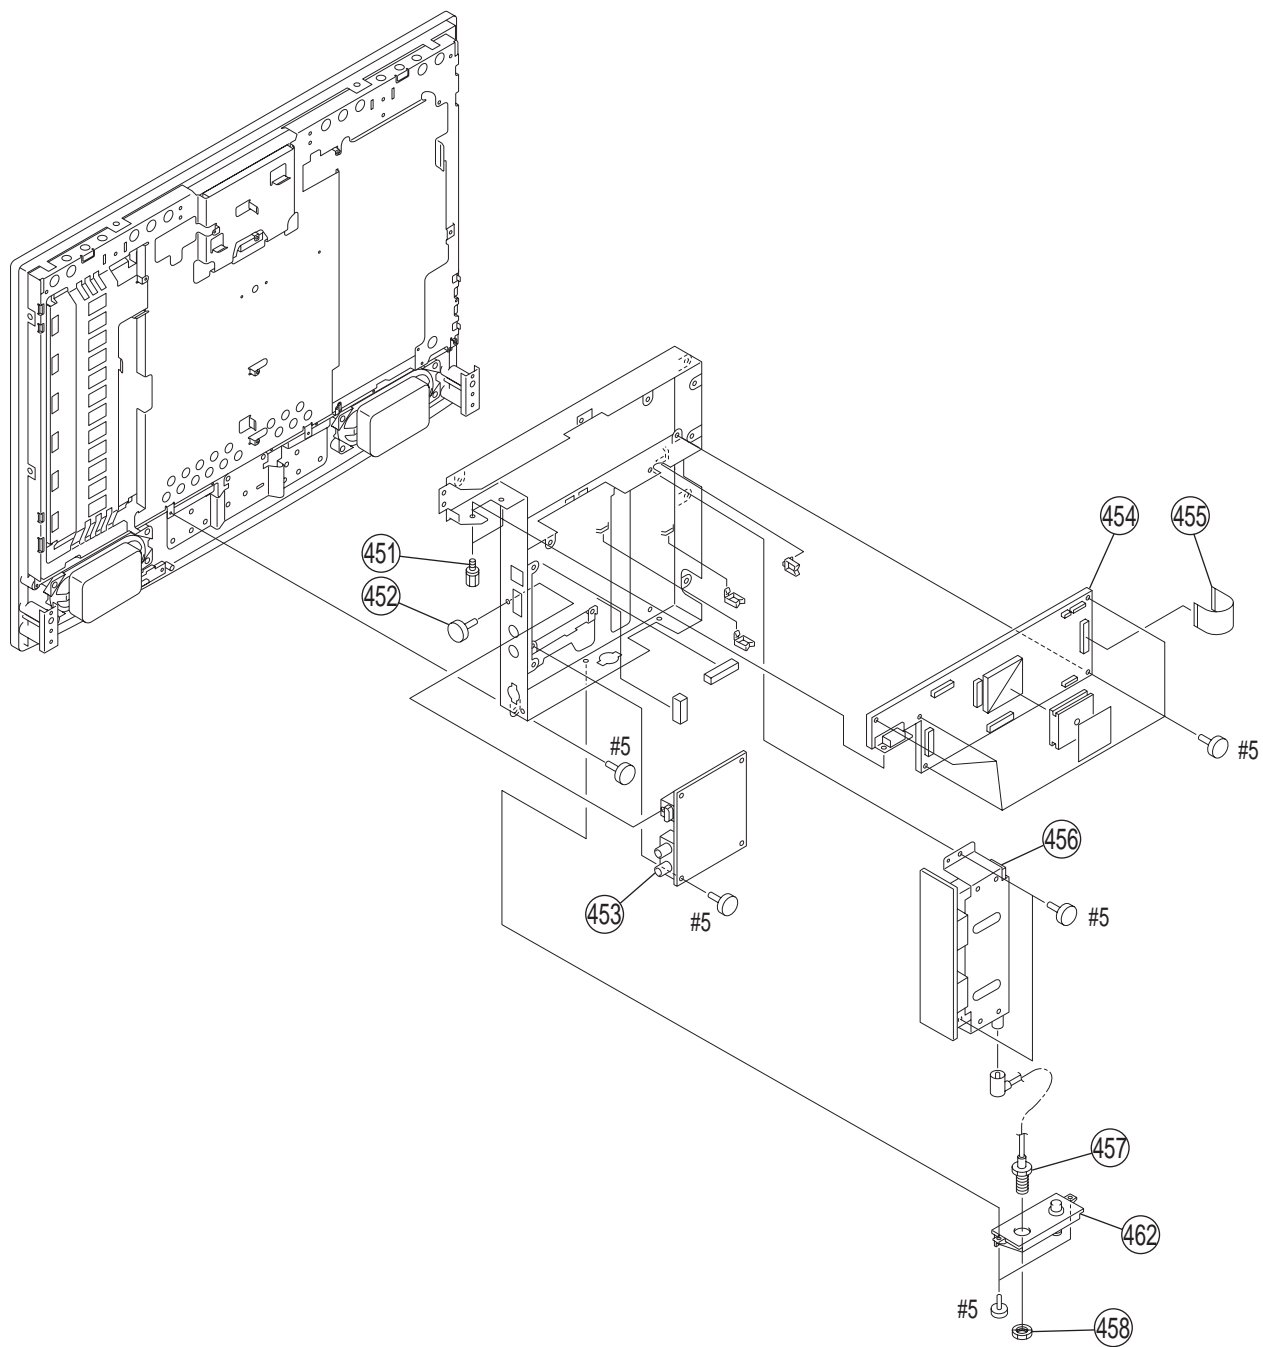

REF. No.	PART No.	DESCRIPTIONRE	MARK
451	4-635-966-01	SCREW (HEX)	
452	2-588-756-01	SCREW +B 3X4 SCREW WITH SCOTCHGRIP	
453	* A-1052-776-A	P MOUNT	
454	* A-1107-290-A	B MOUNT (NVM)	
455	1-910-012-88	CONNECTOR ASSY 50P	

REF. No.	PART No.	DESCRIPTIONRE	MARK
456	* A-1096-630-A	TU MOUNT	
457	1-827-467-61	CORD, CONNECTION	
458	3-682-691-00	NUT, WASHER HEXAGON	
462	2-515-741-11	BRACKET BOTTOM (23)	
#5	7-685-871-01	SCREW +BVTT 3X6 (S)	

**KLV-S23A10**  
**5-2-5. CHASSIS-4**

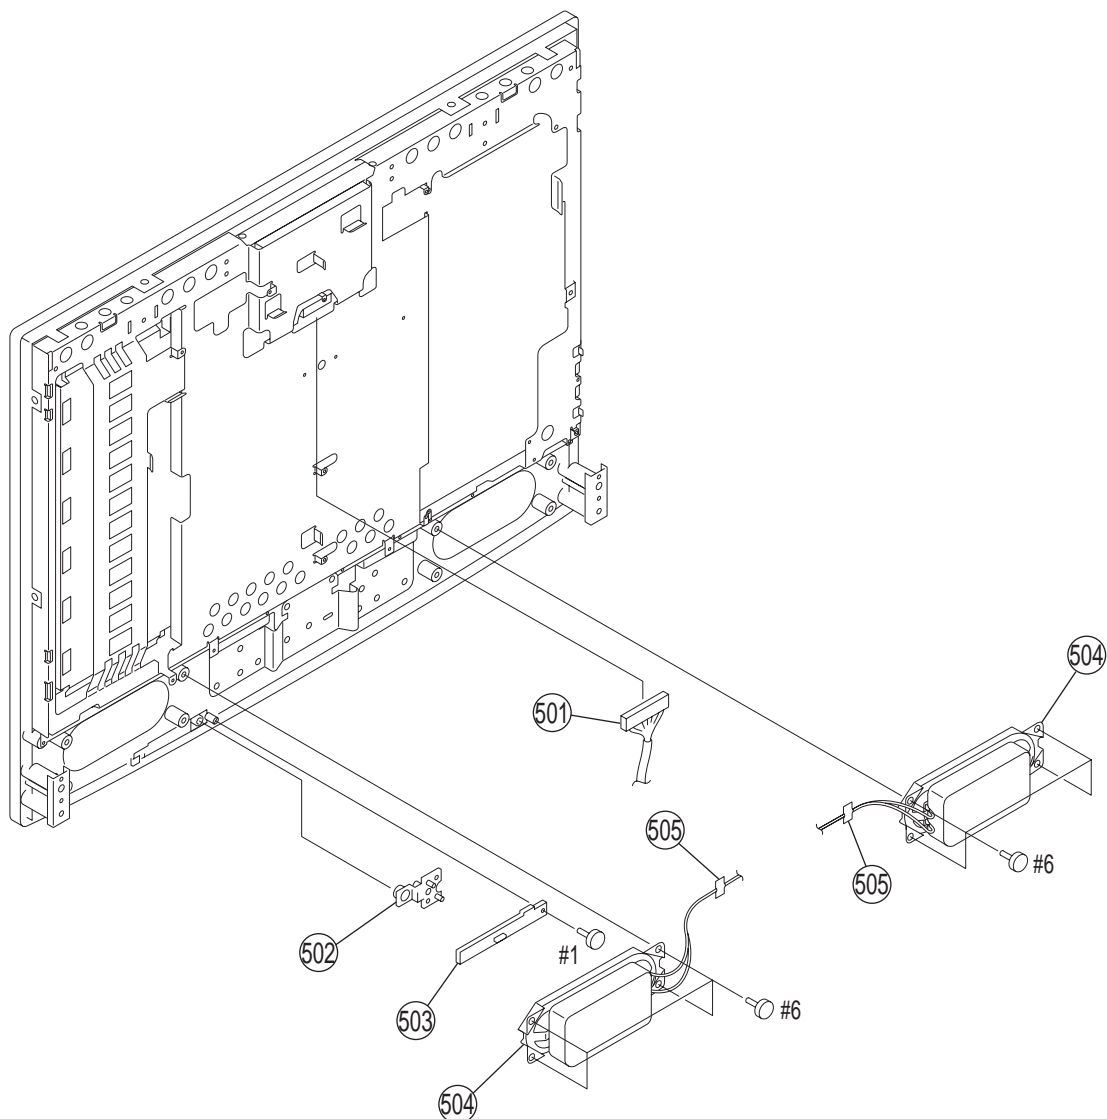


REF. No.	PART No.	DESCRIPTIONRE	MARK
501	1-830-355-11	HARNESS WITH CONNECTOR (LVDS)	
502	* 2-515-684-01	GUIDE, LIGHT SENSOR	
503	* A-1096-629-A	H3 MOUNT	
504	1-826-062-11	LOUDSPEAKER (4X10CM)	
505	4-660-752-01	TAPE (LCD)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#1	7-685-647-79	SCREW +BVTP 3X10 TYPE2 IT-3	
#6	7-685-661-79	SCREW +BVTP 4X12 TYPE2 N-S	

## KLV-S23A10


### 5-2-6. LCD PANEL

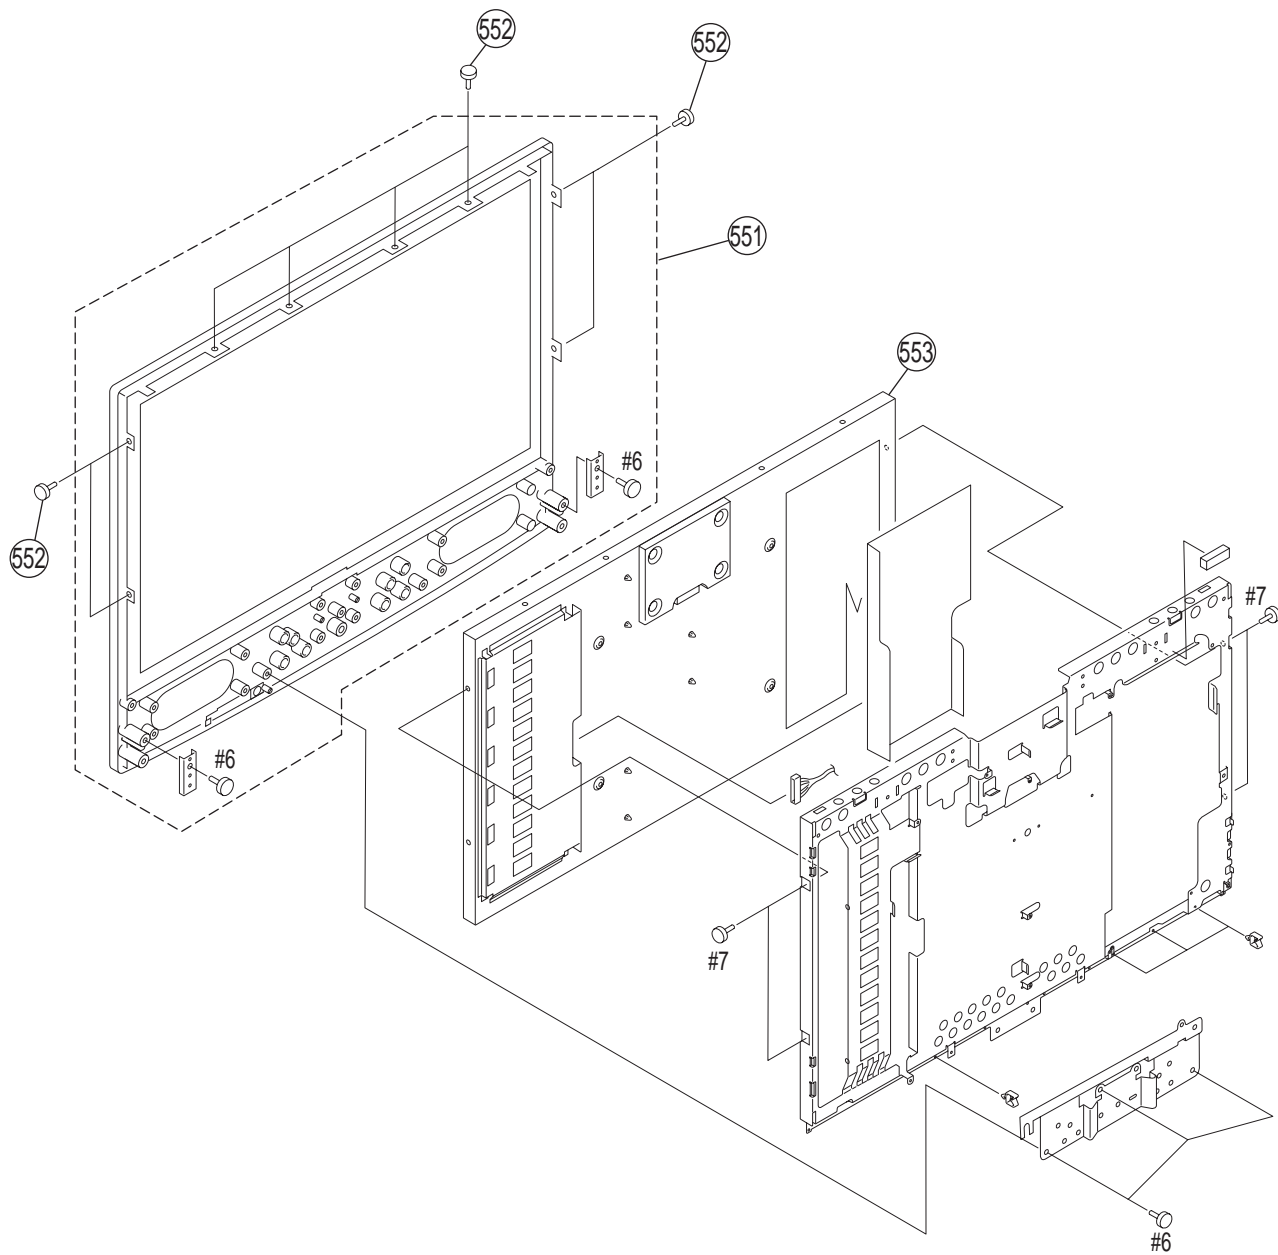

REF. No.	PART No.	DESCRIPTIONRE	MARK
551	X-2050-211-1	BEZEL ASSY (23)	
552	2-588-756-01	SCREW +B 3X4 WITH SCOTCHGRIP	
553	1-805-803-11	LCD PANEL (23INCH WXGA+TFT)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
#6	7-685-661-79	SCREW +BVTP 4X12 TYPE2 N-S	
#7	7-682-948-01	SCREW +PSW 3X8	

**KLV-S23A10**  
**5-2-7. PACKING MATERIALS**

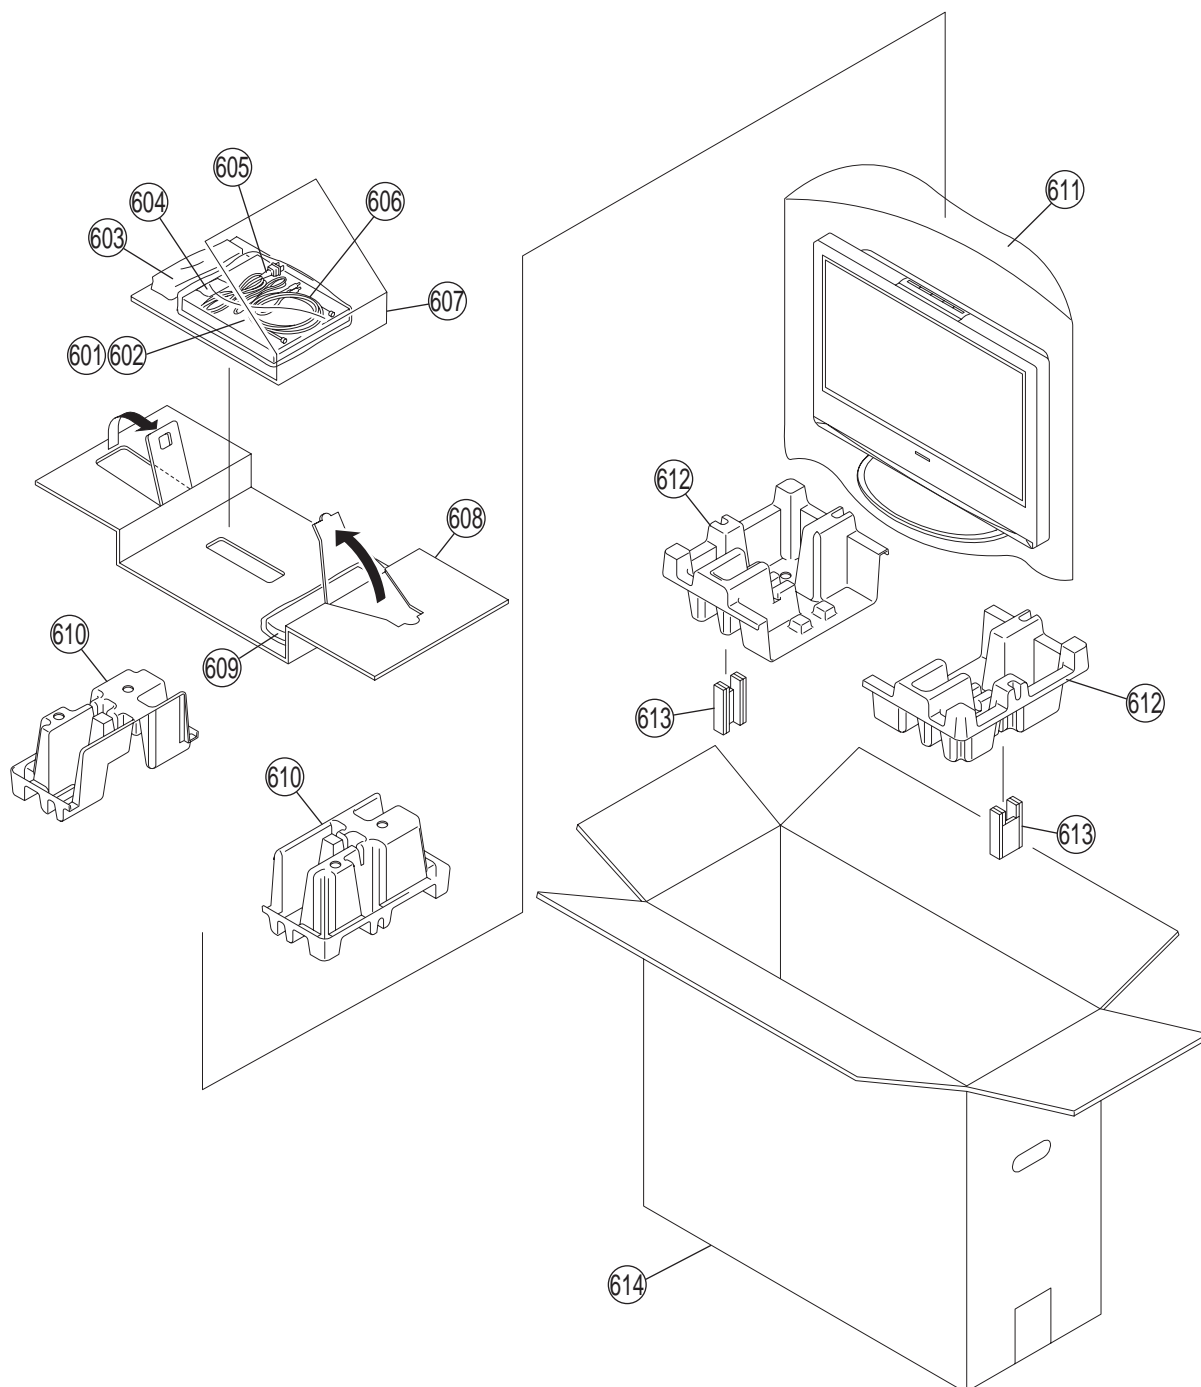

REF. No.	PART No.	DESCRIPTIONRE	MARK
601	2-589-826-11	MANUAL, INSTRUCTION (UC)	
	2-589-826-21	MANUAL, INSTRUCTION (FR)	
	2-589-826-31	MANUAL, INSTRUCTION (ES)	
602	2-589-827-11	GUIDE, QUICK SETUP (UC)	
	2-589-827-21	GUIDE, QUICK SETUP (FR)	
	2-589-827-31	GUIDE, QUICK SETUP (ES)	
603	X-2055-287-2	BAG ASSY, RUDDER LOCK	
604	7-621-853-30	SCREW, WOOD +R 3.1X13	
605	△ 1-827-924-21	CORD, AC	
606	1-757-319-52	CABLE, COAXIAL (WITH (F) PLUG)	
607	2-629-081-01	SPACER	
608	* 2-546-981-01	BOARD, TOP	
609	1-479-278-11	REMOTE COMMANDER (RM-YA001)	
610	* 2-541-967-02	CUSHION (UPPER)	

REF. No.	PART No.	DESCRIPTIONRE	MARK
611	2-629-958-01	BAG, PROTECTION	
612	* 2-541-968-02	CUSHION (LOWER)	
613	2-592-170-01	REINFORCEMENT SIDE	
614	* 2-589-824-01	INDIVIDUAL CARTON	

## SECTION 6

### ELECTRICAL PARTS LIST

#### NOTE:

The components identified  $\triangle$  marked are critical for safety.  
Replace only with the part number specified.

Les composants identifiés par la marque  $\triangle$  sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

Electrical parts list of the specified boards for board replacement service are not included in this section.  
See Appendix of this manual if you need them.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

#### RESISTORS

- All resistors are in ohms
- F : nonflammable

No.	#	Board	Type	△/△	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1		A1U	CAPACITOR		C2518	1-126-206-11	ELECT CHIP 100UF 20.00% 6.3V	KLV-S19A10	
2		A1U	CAPACITOR		C2519	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
3		A1U	CAPACITOR		C2520	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
4		A1U	CAPACITOR		C2525	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
5		A1U	CAPACITOR		C2526	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
6		A1U	CAPACITOR		C2527	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
7		A1U	CAPACITOR		C2528	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
8		A1U	CAPACITOR		C2529	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
9		A1U	CAPACITOR		C2530	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
10		A1U	CAPACITOR		C2531	1-126-206-11	ELECT CHIP 100UF 20.00% 6.3V	KLV-S19A10	
11		A1U	CAPACITOR		C2532	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
12		A1U	CAPACITOR		C2533	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
13		A1U	CAPACITOR		C2534	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
14		A1U	CAPACITOR		C2535	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
15		A1U	CAPACITOR		C2536	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
16		A1U	CAPACITOR		C2538	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
17		A1U	CAPACITOR		C2539	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
18		A1U	CAPACITOR		C2540	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
19		A1U	CAPACITOR		C2541	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
20		A1U	CAPACITOR		C2543	1-126-206-11	ELECT CHIP 100UF 20.00% 6.3V	KLV-S19A10	
21		A1U	CAPACITOR		C2544	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
22		A1U	CAPACITOR		C2549	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V	KLV-S19A10	
23		A1U	CAPACITOR		C2550	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V	KLV-S19A10	
24		A1U	CAPACITOR		C2553	1-117-681-11	ELECT CHIP 100UF 20.00% 16V	KLV-S19A10	
25		A1U	CAPACITOR		C2555	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
26		A1U	CAPACITOR		C2801	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
27		A1U	CAPACITOR		C2802	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
28		A1U	CAPACITOR		C2803	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
29		A1U	CAPACITOR		C2804	1-131-661-21	ELECT CHIP 100UF 20% 10V	KLV-S19A10	
30		A1U	CAPACITOR		C2805	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
31		A1U	CAPACITOR		C2811	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
32		A1U	CAPACITOR		C2812	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
33		A1U	CAPACITOR		C2813	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
34		A1U	CAPACITOR		C2814	1-126-402-11	ELECT CHIP 2.2UF 20.00% 50V	KLV-S19A10	
35		A1U	CAPACITOR		C7002	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
36		A1U	CAPACITOR		C7005	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
37		A1U	CAPACITOR		C7007	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
38		A1U	CAPACITOR		C7008	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	
39		A1U	CAPACITOR		C7101	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
40		A1U	CAPACITOR		C7102	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
41		A1U	CAPACITOR		C7107	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
42		A1U	CAPACITOR		C7108	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
43		A1U	CAPACITOR		C7109	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
44		A1U	CAPACITOR		C7112	1-117-681-11	ELECT CHIP 100UF 20.00% 16V	KLV-S19A10	
45		A1U	CAPACITOR		C7113	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
46		A1U	CAPACITOR		C7115	1-117-681-11	ELECT CHIP 100UF 20.00% 16V	KLV-S19A10	
47		A1U	CAPACITOR		C7116	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
48		A1U	CAPACITOR		C7315	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
49		A1U	CAPACITOR		C7316	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
50		A1U	CAPACITOR		C7317	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
51		A1U	CAPACITOR		C7318	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
52		A1U	CAPACITOR		C7319	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V	KLV-S19A10	
53		A1U	CAPACITOR		C7320	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V	KLV-S19A10	
54		A1U	CAPACITOR		C7321	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V	KLV-S19A10	
55		A1U	CAPACITOR		C7322	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V	KLV-S19A10	
56		A1U	CAPACITOR		C7323	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V	KLV-S19A10	
57		A1U	CAPACITOR		C7324	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
58		A1U	CAPACITOR		C7325	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
59		A1U	CAPACITOR		C7326	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
60		A1U	CAPACITOR		C7327	1-117-681-11	ELECT CHIP 100UF 20.00% 16V	KLV-S19A10	
61		A1U	CAPACITOR		C7328	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V	KLV-S19A10	
62		A1U	CAPACITOR		C7329	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
63		A1U	CAPACITOR		C7330	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
64		A1U	CAPACITOR		C7331	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
65		A1U	CAPACITOR		C7333	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
66		A1U	CAPACITOR		C7334	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
67		A1U	CAPACITOR		C7335	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
68		A1U	CAPACITOR		C7336	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V	KLV-S19A10	
69		A1U	CAPACITOR		C7337	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
70		A1U	CAPACITOR		C7338	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
71		A1U	CAPACITOR		C7339	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
72		A1U	CAPACITOR		C7340	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
73		A1U	CAPACITOR		C7341	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
74		A1U	CAPACITOR		C7342	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
75		A1U	CAPACITOR		C7343	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
76		A1U	CAPACITOR		C7344	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
77		A1U	CAPACITOR		C7345	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
78		A1U	CAPACITOR		C7346	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
79		A1U	CAPACITOR		C7347	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
80		A1U	CAPACITOR		C7348	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V	KLV-S19A10	
81		A1U	CAPACITOR		C7349	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V	KLV-S19A10	
82		A1U	CAPACITOR		C7350	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V	KLV-S19A10	
83		A1U	CAPACITOR		C7351	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V	KLV-S19A10	
84		A1U	CAPACITOR		C7352	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
85		A1U	CAPACITOR		C7401	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
86		A1U	CAPACITOR		C7404	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
87		A1U	CAPACITOR		C7406	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
88		A1U	CAPACITOR		C7422	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
89		A1U	CAPACITOR		C7423	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
90		A1U	CAPACITOR		C7424	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
91		A1U	CAPACITOR		C7425	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
92		A1U	CAPACITOR		C7426	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
93		A1U	CAPACITOR		C7427	1-126-395-11	ELECT CHIP 22UF 20.00% 16V	KLV-S19A10	
94		A1U	CAPACITOR		C7428	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
95		A1U	CAPACITOR		C7429	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
96		A1U	CAPACITOR		C7430	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
97		A1U	CAPACITOR		C7602	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
98		A1U	CAPACITOR		C7603	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
99		A1U	CAPACITOR		C7604	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V	KLV-S19A10	
100		A1U	CAPACITOR		C7605	1-126-394-11	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
101		A1U	CAPACITOR		C7606	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
102		A1U	CAPACITOR		C7607	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
103		A1U	CAPACITOR		C7608	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
104		A1U	CAPACITOR		C7609	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
105		A1U	CAPACITOR		C7610	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V	KLV-S19A10	
106		A1U	CAPACITOR		C7726	1-126-394-11	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
107		A1U	CAPACITOR		C7727	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
108		A1U	CAPACITOR		C7728	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
109		A1U	CAPACITOR		C7729	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
110		A1U	CAPACITOR		C7730	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
111		A1U	CAPACITOR		C7731	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
112		A1U	CAPACITOR		C7732	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
113		A1U	CAPACITOR		C7733	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S19A10	
114		A1U	CAPACITOR		C7736	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
115		A1U	CAPACITOR		C7737	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
116		A1U	CAPACITOR		C7738	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
117		A1U	CAPACITOR		C7739	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
118		A1U	CAPACITOR		C7740	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
119		A1U	CAPACITOR		C7741	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
120		A1U	CAPACITOR		C7742	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
121		A1U	CAPACITOR		C7743	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
122		A1U	CAPACITOR		C7751	1-126-394-11	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
123		A1U	CAPACITOR		C7752	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
124		A1U	CAPACITOR		C7753	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
125		A1U	CAPACITOR		C7754	1-126-394-11	ELECT CHIP 10UF 20.00% 16V	KLV-S19A10	
126		A1U	CAPACITOR		C7756	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
127		A1U	CAPACITOR		C7757	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
128		A1U	CAPACITOR		C7758	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S19A10	
129		A1U	CAPACITOR		C7760	1-137-894-21	ELECT CHIP 470UF 20% 25V	KLV-S19A10	
130		A1U	CAPACITOR		C7761	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
131		A1U	CAPACITOR		C7762	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
132		A1U	CAPACITOR		C7763	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
133		A1U	CAPACITOR		C7764	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
134		A1U	CAPACITOR		C7765	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
135		A1U	CAPACITOR		C7766	1-100-591-91	CERAMIC CHIP 1UF 10% 25V	KLV-S19A10	
136		A1U	CAPACITOR		C7768	1-100-591-91	CERAMIC CHIP 1UF 10% 25V	KLV-S19A10	
137		A1U	CAPACITOR		C7770	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
138		A1U	CAPACITOR		C7771	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
139		A1U	CAPACITOR		C7772	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
140		A1U	CAPACITOR		C7773	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
141		A1U	CAPACITOR		C7776	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	
142		A1U	CAPACITOR		C7777	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	
143		A1U	CAPACITOR		C7779	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
144		A1U	CAPACITOR		C7780	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
145		A1U	CAPACITOR		C7784	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
146		A1U	CAPACITOR		C7785	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	
147		A1U	CAPACITOR		C7786	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	
148		A1U	CAPACITOR		C7787	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	



No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
149		A1U	CAPACITOR		C7788	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
150		A1U	CAPACITOR		C7789	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
151		A1U	CAPACITOR		C7790	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
152		A1U	CAPACITOR		C7791	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
153		A1U	CAPACITOR		C7792	1-100-912-11	CERAMIC CHIP 1UF 10% 25V	KLV-S19A10	
154		A1U	CAPACITOR		C7793	1-100-912-11	CERAMIC CHIP 1UF 10% 25V	KLV-S19A10	
155		A1U	CAPACITOR		C7794	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
156		A1U	CAPACITOR		C7795	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	
157		A1U	CAPACITOR		C7796	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
158		A1U	CAPACITOR		C7797	1-164-816-11	CERAMIC CHIP 220PF 2.00% 50V	KLV-S19A10	
159		A1U	CAPACITOR		C7798	1-100-591-91	CERAMIC CHIP 1UF 10% 25V	KLV-S19A10	
160		A1U	CAPACITOR		C7799	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V	KLV-S19A10	
161		A1U	CAPACITOR		C7800	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V	KLV-S19A10	
162		A1U	CAPACITOR		C7801	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V	KLV-S19A10	
163		A1U	CAPACITOR		C7802	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V	KLV-S19A10	
164		A1U	CAPACITOR		C7803	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
165		A1U	CAPACITOR		C7804	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
166		A1U	CAPACITOR		C7805	1-137-980-91	CERAMIC CHIP 0.47UF 10% 50V	KLV-S19A10	
167		A1U	CAPACITOR		C7806	1-137-980-91	CERAMIC CHIP 0.47UF 10% 50V	KLV-S19A10	
168		A1U	CAPACITOR		C7807	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S19A10	
169		A1U	CAPACITOR		C7808	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
170		A1U	CAPACITOR		C7810	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	
171		A1U	CAPACITOR		C8429	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
172		A1U	CAPACITOR		C8430	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
173		A1U	CAPACITOR		C8431	1-163-037-11	CERAMIC CHIP 0.022UF 10.00% 50V	KLV-S19A10	
174		A1U	CAPACITOR		C8432	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V	KLV-S19A10	
175		A1U	CAPACITOR		C8434	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V	KLV-S19A10	
176		A1U	CAPACITOR		C8501	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S19A10	
177		A1U	CAPACITOR		C8502	1-100-911-11	CERAMIC CHIP 4.7UF 10% 25V	KLV-S19A10	
178		A1U	CAPACITOR		C8503	1-128-528-11	ELECT 470UF 20% 25V	KLV-S19A10	
179		A1U	CAPACITOR		C8505	1-135-372-31	ELECT 470UF 20% 10V	KLV-S19A10	
180		A1U	CAPACITOR		C8508	1-100-911-11	CERAMIC CHIP 4.7UF 10% 25V	KLV-S19A10	
181		A1U	CAPACITOR		C8509	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
182		A1U	CAPACITOR		C8510	1-165-728-31	ELECT 330UF 20% 16V	KLV-S19A10	
183		A1U	CAPACITOR		C8512	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
184		A1U	CAPACITOR		C8513	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
185		A1U	CAPACITOR		C8528	1-126-941-11	ELECT 470UF 20.00% 25V	KLV-S19A10	
186		A1U	CAPACITOR		C8555	1-100-911-11	CERAMIC CHIP 4.7UF 10% 25V	KLV-S19A10	
187		A1U	CAPACITOR		C8556	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
188		A1U	CAPACITOR		C8557	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
189		A1U	CAPACITOR		C8558	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
190		A1U	CAPACITOR		C8559	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
191		A1U	CAPACITOR		C8561	1-135-372-31	ELECT 470UF 20% 10V	KLV-S19A10	
192		A1U	CAPACITOR		C8566	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
193		A1U	CAPACITOR		C8569	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
194		A1U	CAPACITOR		C8570	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
195		A1U	CAPACITOR		C8571	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
196		A1U	CAPACITOR		C8572	1-104-665-11	ELECT 100UF 20.00% 25V	KLV-S19A10	
197		A1U	CAPACITOR		C8573	1-126-941-11	ELECT 470UF 20.00% 25V	KLV-S19A10	
198		A1U	CAPACITOR		C8576	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
199		A1U	CAPACITOR		C8577	1-128-952-31	ELECT 220UF 20% 25V	KLV-S19A10	
200		A1U	CAPACITOR		C8578	1-100-911-11	CERAMIC CHIP 4.7UF 10% 25V	KLV-S19A10	
201		A1U	CAPACITOR		C8579	1-100-911-11	CERAMIC CHIP 4.7UF 10% 25V	KLV-S19A10	
202		A1U	CAPACITOR		C8580	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
203		A1U	CAPACITOR		C8581	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
204		A1U	CAPACITOR		C8582	1-165-728-31	ELECT 330UF 20% 16V	KLV-S19A10	
205		A1U	CAPACITOR		C8583	1-165-728-31	ELECT 330UF 20% 16V	KLV-S19A10	
206		A1U	CAPACITOR		C8586	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
207		A1U	CAPACITOR		C8587	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
208		A1U	CAPACITOR		C8588	1-126-941-11	ELECT 470UF 20.00% 25V	KLV-S19A10	
209		A1U	CAPACITOR		C8589	1-165-728-31	ELECT 330UF 20% 16V	KLV-S19A10	
210		A1U	CAPACITOR		C8592	1-135-372-31	ELECT 470UF 20% 10V	KLV-S19A10	
211		A1U	CAPACITOR		C8593	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
212		A1U	CAPACITOR		C8594	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
213		A1U	CAPACITOR		C8595	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
214		A1U	CAPACITOR		C8605	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V	KLV-S19A10	
215		A1U	CAPACITOR		C8606	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
216		A1U	CAPACITOR		C8608	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V	KLV-S19A10	
217		A1U	CAPACITOR		C8609	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
218		A1U	CAPACITOR		C8655	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
219		A1U	CAPACITOR		C8656	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
220		A1U	CAPACITOR		C8657	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
221		A1U	CAPACITOR		C8658	1-104-652-11	ELECT 470UF 20% 10V	KLV-S19A10	
222		A1U	CAPACITOR		C8660	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
223		A1U	CAPACITOR		C8661	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S19A10	
224		A1U	CAPACITOR		C8662	1-128-528-11	ELECT 470UF 20% 25V	KLV-S19A10	
225		A1U	CAPACITOR		C8690	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
226		A1U	CAPACITOR		C8691	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S19A10	
227		A1U	CAPACITOR		C8692	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
228		A1U	CAPACITOR		C8693	1-107-882-91	ELECT 100UF 20% 16V	KLV-S19A10	
229		A1U	CAPACITOR		C9001	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	KLV-S19A10	
230		A1U	CAPACITOR		C9002	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	KLV-S19A10	
231		A1U	CAPACITOR		C9003	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
232		A1U	CAPACITOR		C9004	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
233		A1U	CAPACITOR		C9005	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
234		A1U	CAPACITOR		C9006	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
235		A1U	CAPACITOR		C9007	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
236		A1U	CAPACITOR		C9008	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
237		A1U	CAPACITOR		C9009	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
238		A1U	CAPACITOR		C9010	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
239		A1U	CAPACITOR		C9011	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
240		A1U	CAPACITOR		C9012	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
241		A1U	CAPACITOR		C9041	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	KLV-S19A10	
242		A1U	CAPACITOR		C9048	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
243		A1U	CAPACITOR		C9049	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
244		A1U	CAPACITOR		C9050	1-100-743-91	CERAMIC CHIP 2.2UF 20% 16V	KLV-S19A10	
245		A1U	CAPACITOR		C9060	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
246		A1U	CAPACITOR		C9061	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
247		A1U	CAPACITOR		C9062	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
248		A1U	CAPACITOR		C9063	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
249		A1U	CAPACITOR		C9064	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
250		A1U	CAPACITOR		C9065	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
251		A1U	CAPACITOR		C9066	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
252		A1U	CAPACITOR		C9067	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
253		A1U	CAPACITOR		C9073	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
254		A1U	CAPACITOR		C9074	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
255		A1U	CAPACITOR		C9075	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
256		A1U	CAPACITOR		C9076	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
257		A1U	CAPACITOR		C9077	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
258		A1U	CAPACITOR		C9078	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
259		A1U	CAPACITOR		C9079	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S19A10	
260		A1U	CAPACITOR		C9080	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S19A10	
261		A1U	CAPACITOR		C9306	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
262		A1U	CAPACITOR		C9307	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S19A10	
263		A1U	CAPACITOR		C9308	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
264		A1U	CAPACITOR		C9407	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
265		A1U	CAPACITOR		C9409	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S19A10	
266		A1U	CAPACITOR		C9412	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S19A10	
267		A1U	CAPACITOR		C9413	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
268		A1U	CAPACITOR		C9414	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
269		A1U	CAPACITOR		C9415	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S19A10	
270		A1U	CONNECTOR	*	CN7750	1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P	KLV-S19A10	
271		A1U	CONNECTOR		CN9001	1-695-915-11	TAB (CONTACT)	KLV-S19A10	
272		A1U	CONNECTOR		CN9002	1-695-915-11	TAB (CONTACT)	KLV-S19A10	
273		A1U	CONNECTOR		CN9300	1-794-519-21	PIN, CONNECTOR (PC BOARD) 14P	KLV-S19A10	
274		A1U	CONNECTOR		CN9401	1-778-652-11	CONNECTOR, FFC (ZIF) 50P	KLV-S19A10	
275		A1U	CONNECTOR		CN9405	1-816-296-21	PIN, CONNECTOR (PC BOARD) 9P	KLV-S19A10	
276		A1U	CONNECTOR	*	CN9501	1-764-333-11	PLUG, CONNECTOR 10P	KLV-S19A10	
277		A1U	DIODE		D7409	8-719-085-31	DIODE MM3Z2V4T1	KLV-S19A10	
278		A1U	DIODE		D7410	8-719-085-31	DIODE MM3Z2V4T1	KLV-S19A10	
279		A1U	DIODE		D7411	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
280		A1U	DIODE		D7412	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
281		A1U	DIODE		D7413	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
282		A1U	DIODE		D7415	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
283		A1U	DIODE		D7416	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
284		A1U	DIODE		D7603	8-719-085-31	DIODE MM3Z2V4T1	KLV-S19A10	
285		A1U	DIODE		D7604	8-719-085-31	DIODE MM3Z2V4T1	KLV-S19A10	
286		A1U	DIODE		D7605	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
287		A1U	DIODE		D7754	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
288		A1U	DIODE		D7755	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
289		A1U	DIODE		D7756	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
290		A1U	DIODE		D7757	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
291		A1U	DIODE		D7758	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
292		A1U	DIODE		D7759	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
293		A1U	DIODE		D7767	6-500-884-01	DIODE P6SMBJ30A-5	KLV-S19A10	
294		A1U	DIODE		D7768	6-500-884-01	DIODE P6SMBJ30A-5	KLV-S19A10	
295		A1U	DIODE		D7769	6-500-884-01	DIODE P6SMBJ30A-5	KLV-S19A10	
296		A1U	DIODE		D7770	6-500-884-01	DIODE P6SMBJ30A-5	KLV-S19A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
297		A1U	DIODE		D7775	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
298		A1U	DIODE		D7832	8-719-085-31	DIODE MM3Z2V4T1	KLV-S19A10	
299		A1U	DIODE		D7833	8-719-085-31	DIODE MM3Z2V4T1	KLV-S19A10	
300		A1U	DIODE		D8501	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S19A10	
301		A1U	DIODE		D8503	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S19A10	
302		A1U	DIODE		D8507	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S19A10	
303		A1U	DIODE		D8509	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S19A10	
304		A1U	DIODE		D8510	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S19A10	
305		A1U	DIODE		D8551	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S19A10	
306		A1U	DIODE		D8553	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S19A10	
307		A1U	DIODE		D8558	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
308		A1U	DIODE		D8560	8-719-056-82	DIODE UDZ-TE-17-6.2B	KLV-S19A10	
309		A1U	DIODE		D8567	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
310		A1U	DIODE		D8568	8-719-049-38	DIODE 1N5404TU	KLV-S19A10	
311		A1U	DIODE		D8570	8-719-056-83	DIODE UDZ-TE-17-6.8B	KLV-S19A10	
312		A1U	DIODE		D8571	6-500-551-01	DIODE MM3Z11VT1	KLV-S19A10	
313		A1U	DIODE		D8572	8-719-081-99	DIODE MM3Z13VT1	KLV-S19A10	
314		A1U	DIODE		D8573	8-719-081-97	DIODE MMDL914T1	KLV-S19A10	
315		A1U	DIODE		D8575	8-719-081-99	DIODE MM3Z13VT1	KLV-S19A10	
316		A1U	DIODE		D9009	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
317		A1U	DIODE		D9010	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
318		A1U	DIODE		D9011	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
319		A1U	DIODE		D9012	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
320		A1U	DIODE		D9013	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
321		A1U	DIODE		D9014	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
322		A1U	DIODE		D9015	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
323		A1U	DIODE		D9016	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
324		A1U	DIODE		D9035	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
325		A1U	DIODE		D9036	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
326		A1U	DIODE		D9037	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
327		A1U	DIODE		D9038	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
328		A1U	DIODE		D9050	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
329		A1U	DIODE		D9051	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
330		A1U	DIODE		D9052	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
331		A1U	DIODE		D9053	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
332		A1U	DIODE		D9056	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
333		A1U	DIODE		D9057	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
334		A1U	DIODE		D9058	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
335		A1U	DIODE		D9059	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
336		A1U	DIODE		D9302	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
337		A1U	DIODE		D9303	8-719-977-28	DIODE DTZ10B	KLV-S19A10	
338		A1U	FUSE	△	F8601	1-532-506-32	FUSE 6.3A 250V	KLV-S19A10	
339		A1U	FERRITE BEAD		FB7750	1-469-185-11	FERRITE 0UH	KLV-S19A10	
340		A1U	FERRITE BEAD		FB7751	1-469-185-11	FERRITE 0UH	KLV-S19A10	
341		A1U	FERRITE BEAD		FB7752	1-469-185-11	FERRITE 0UH	KLV-S19A10	
342		A1U	FERRITE BEAD		FB7753	1-469-185-11	FERRITE 0UH	KLV-S19A10	
343		A1U	FERRITE BEAD		FB7754	1-469-185-11	FERRITE 0UH	KLV-S19A10	
344		A1U	FERRITE BEAD		FB7755	1-469-185-11	FERRITE 0UH	KLV-S19A10	
345		A1U	FERRITE BEAD		FB7756	1-469-185-11	FERRITE 0UH	KLV-S19A10	
346		A1U	FERRITE BEAD		FB7757	1-469-185-11	FERRITE 0UH	KLV-S19A10	
347		A1U	FERRITE BEAD		FB8501	1-469-775-21	FERRITE 0UH	KLV-S19A10	
348		A1U	FERRITE BEAD		FB8552	1-469-775-21	FERRITE 0UH	KLV-S19A10	
349		A1U	FERRITE BEAD		FB8553	1-469-775-21	FERRITE 0UH	KLV-S19A10	
350		A1U	FERRITE BEAD		FB8554	1-469-775-21	FERRITE 0UH	KLV-S19A10	
351		A1U	FERRITE BEAD		FB8609	1-414-445-11	FERRITE 0UH	KLV-S19A10	
352		A1U	FERRITE BEAD		FB8610	1-414-445-11	FERRITE 0UH	KLV-S19A10	
353		A1U	FERRITE BEAD		FB8611	1-414-445-11	FERRITE 0UH	KLV-S19A10	
354		A1U	FERRITE BEAD		FB8651	1-469-775-21	FERRITE 0UH	KLV-S19A10	
355		A1U	FUSE HOLDER		FH8601	1-533-217-31	FUSE HOLDER 0A 0V	KLV-S19A10	
356		A1U	FUSE HOLDER		FH8602	1-533-217-31	FUSE HOLDER 0A 0V	KLV-S19A10	
357		A1U	IC		IC2505	8-753-232-63	IC CXA2229Q-T6	KLV-S19A10	
358		A1U	IC		IC7001	8-759-460-79	IC BA09FP-E2	KLV-S19A10	
359		A1U	IC		IC7103	8-752-107-98	IC CXA2188Q-T4	KLV-S19A10	
360		A1U	IC		IC7301	6-707-724-01	IC NJW1149AFH1	KLV-S19A10	
361		A1U	IC		IC7404	6-705-679-01	IC RC4558PWR	KLV-S19A10	
362		A1U	IC		IC7405	6-703-042-01	IC CD4052BNSR	KLV-S19A10	
363		A1U	IC		IC7601	8-759-359-49	IC NJM3414AV(TE2)	KLV-S19A10	
364		A1U	IC		IC7702	6-705-679-01	IC RC4558PWR	KLV-S19A10	
365		A1U	IC		IC7703	8-759-836-72	IC NJM2521V(TE2)	KLV-S19A10	
366		A1U	IC		IC7704	8-759-836-72	IC NJM2521V(TE2)	KLV-S19A10	
367		A1U	IC		IC7750	6-705-679-01	IC RC4558PWR	KLV-S19A10	
368		A1U	IC		IC7802	6-707-708-01	IC TPA3004D2PHPR	KLV-S19A10	
369		A1U	IC		IC8401	8-749-925-00	IC TK11819MTL	KLV-S19A10	
370		A1U	IC		IC8501	6-704-407-01	IC PQ1CZ41H2ZPH	KLV-S19A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
371		A1U	IC		IC8502	6-704-407-01	IC PQ1CZ41H2ZPH	KLV-S19A10	
372		A1U	IC		IC8552	6-702-142-01	IC PQ1CY1032ZP	KLV-S19A10	
373		A1U	IC		IC8553	6-704-407-01	IC PQ1CZ41H2ZPH	KLV-S19A10	
374		A1U	IC		IC8554	6-702-142-01	IC PQ1CY1032ZP	KLV-S19A10	
375		A1U	IC		IC8652	8-759-592-79	IC BA00AST-V5	KLV-S19A10	
376		A1U	IC		IC8653	6-706-740-01	IC BA00BC0WFP-E2	KLV-S19A10	
377		A1U	IC		IC8690	6-703-883-01	IC MM1575ANLEG	KLV-S19A10	
378		A1U	JACK		J8601	1-793-890-11	JACK, DC	KLV-S19A10	
379		A1U	JACK		J9001	1-815-015-11	JACK BLOCK, PIN	KLV-S19A10	
380		A1U	JACK		J9002	1-780-243-11	TERMINAL BLOCK, S 6P	KLV-S19A10	
381		A1U	JACK		J9004	1-793-725-11	JACK BLOCK, PIN 2P	KLV-S19A10	
382		A1U	JACK		J9006	1-780-244-11	TERMINAL BLOCK, S(RIGHT ANGLE)	KLV-S19A10	
383		A1U	JACK		J9011	1-507-792-00	JACK	KLV-S19A10	
384		A1U	JACK		J9852	1-568-267-11	JACK	KLV-S19A10	
385		A1U	SHORT CHIP		JR7001	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
386		A1U	SHORT CHIP		JR7002	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
387		A1U	SHORT CHIP		JR7003	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
388		A1U	SHORT CHIP		JR7004	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
389		A1U	SHORT CHIP		JR7005	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
390		A1U	SHORT CHIP		JR7006	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
391		A1U	SHORT CHIP		JR7007	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
392		A1U	SHORT CHIP		JR7008	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
393		A1U	SHORT CHIP		JR7009	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
394		A1U	SHORT CHIP		JR7010	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
395		A1U	SHORT CHIP		JR7011	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
396		A1U	SHORT CHIP		JR7012	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
397		A1U	SHORT CHIP		JR7013	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
398		A1U	SHORT CHIP		JR7014	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
399		A1U	SHORT CHIP		JR7015	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
400		A1U	SHORT CHIP		JR7016	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
401		A1U	SHORT CHIP		JR8501	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
402		A1U	SHORT CHIP		JR8502	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
403		A1U	SHORT CHIP		JR8503	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
404		A1U	SHORT CHIP		JR8504	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
405		A1U	SHORT CHIP		JR8505	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
406		A1U	SHORT CHIP		JR8506	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
407		A1U	SHORT CHIP		JR8507	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
408		A1U	SHORT CHIP		JR8508	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
409		A1U	SHORT CHIP		JR8509	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
410		A1U	SHORT CHIP		JR8510	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
411		A1U	SHORT CHIP		JR8511	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
412		A1U	SHORT CHIP		JR8512	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
413		A1U	SHORT CHIP		JR8513	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
414		A1U	SHORT CHIP		JR8514	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
415		A1U	SHORT CHIP		JR8515	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
416		A1U	SHORT CHIP		JR8516	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
417		A1U	COIL		L2501	1-412-058-11	INDUCTOR 10UH	KLV-S19A10	
418		A1U	COIL		L2502	1-412-058-11	INDUCTOR 10UH	KLV-S19A10	
419		A1U	COIL		L2503	1-412-058-11	INDUCTOR 10UH	KLV-S19A10	
420		A1U	COIL		L2504	1-412-058-11	INDUCTOR 10UH	KLV-S19A10	
421		A1U	COIL		L2505	1-412-058-11	INDUCTOR 10UH	KLV-S19A10	
422		A1U	COIL		L2801	1-412-030-11	INDUCTOR 22UH	KLV-S19A10	
423		A1U	COIL		L2802	1-412-030-11	INDUCTOR 22UH	KLV-S19A10	
424		A1U	COIL		L2803	1-412-030-11	INDUCTOR 22UH	KLV-S19A10	
425		A1U	COIL		L2804	1-412-030-11	INDUCTOR 22UH	KLV-S19A10	
426		A1U	COIL		L7001	1-412-549-31	INDUCTOR 1MH	KLV-S19A10	
427		A1U	COIL		L7401	1-412-058-11	INDUCTOR 10UH	KLV-S19A10	
428		A1U	COIL		L7750	1-400-472-11	INDUCTOR 33UH	KLV-S19A10	
429		A1U	COIL		L7751	1-400-472-11	INDUCTOR 33UH	KLV-S19A10	
430		A1U	COIL		L7752	1-400-472-11	INDUCTOR 33UH	KLV-S19A10	
431		A1U	COIL		L7753	1-400-472-11	INDUCTOR 33UH	KLV-S19A10	
432		A1U	COIL		L7801	1-424-976-21	INDUCTOR 47UH	KLV-S19A10	
433		A1U	COIL		L8401	1-469-528-91	INDUCTOR 100UH	KLV-S19A10	
434		A1U	COIL		L8402	1-412-550-11	INDUCTOR 1.2MH	KLV-S19A10	
435		A1U	COIL		L8501	1-412-525-31	INDUCTOR 10UH	KLV-S19A10	
436		A1U	COIL		L8502	1-456-786-21	INDUCTOR 47UH	KLV-S19A10	
437		A1U	COIL		L8504	1-456-786-21	INDUCTOR 47UH	KLV-S19A10	
438		A1U	COIL		L8505	1-406-659-11	INDUCTOR 10UH	KLV-S19A10	
439		A1U	COIL		L8506	1-424-916-21	INDUCTOR 10UH	KLV-S19A10	
440		A1U	COIL		L8507	1-456-786-21	INDUCTOR 47UH	KLV-S19A10	
441		A1U	COIL		L8508	1-424-976-21	INDUCTOR 47UH	KLV-S19A10	
442		A1U	COIL		L8509	1-412-525-31	INDUCTOR 10UH	KLV-S19A10	
443		A1U	COIL		L8553	1-424-976-21	INDUCTOR 47UH	KLV-S19A10	
444		A1U	COIL		L9401	1-406-671-11	INDUCTOR 1MH	KLV-S19A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
445		A1U	COIL		L9402	1-412-549-31	INDUCTOR 1MH	KLV-S19A10	
446		A1U	IC LINK	△	PS7754	1-576-873-11	IC LINK 3.15A 35V	KLV-S19A10	
447		A1U	IC LINK	△	PS8401	1-576-646-11	FUSE 0.5A 50V	KLV-S19A10	
448		A1U	IC LINK	△	PS8501	1-533-595-42	IC LINK 3.15A 90V	KLV-S19A10	
449		A1U	IC LINK	△	PS8502	1-533-596-11	IC LINK 4A 90V	KLV-S19A10	
450		A1U	TRANSISTOR		Q2503	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S19A10	
451		A1U	TRANSISTOR		Q2504	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S19A10	
452		A1U	TRANSISTOR		Q2507	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
453		A1U	TRANSISTOR		Q2508	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
454		A1U	TRANSISTOR		Q2509	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
455		A1U	TRANSISTOR		Q2512	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
456		A1U	TRANSISTOR		Q2513	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
457		A1U	TRANSISTOR		Q2514	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
458		A1U	TRANSISTOR		Q2801	6-550-585-01	TRANSISTOR 2PC4081R-115	KLV-S19A10	
459		A1U	TRANSISTOR		Q2802	6-550-586-01	TRANSISTOR 2PA1576R-115	KLV-S19A10	
460		A1U	TRANSISTOR		Q7001	8-729-029-00	TRANSISTOR DTC115EUA-T106	KLV-S19A10	
461		A1U	TRANSISTOR		Q7406	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S19A10	
462		A1U	TRANSISTOR		Q7407	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S19A10	
463		A1U	TRANSISTOR		Q7411	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S19A10	
464		A1U	TRANSISTOR		Q7413	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S19A10	
465		A1U	TRANSISTOR		Q7601	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S19A10	
466		A1U	TRANSISTOR		Q7602	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S19A10	
467		A1U	TRANSISTOR		Q7605	8-729-015-39	TRANSISTOR DTC323TK	KLV-S19A10	
468		A1U	TRANSISTOR		Q7606	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S19A10	
469		A1U	TRANSISTOR		Q7740	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
470		A1U	TRANSISTOR		Q7741	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
471		A1U	TRANSISTOR		Q7742	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
472		A1U	TRANSISTOR		Q7743	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
473		A1U	TRANSISTOR		Q7744	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S19A10	
474		A1U	TRANSISTOR		Q7752	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S19A10	
475		A1U	TRANSISTOR		Q7753	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S19A10	
476		A1U	TRANSISTOR		Q7754	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S19A10	
477		A1U	TRANSISTOR		Q7755	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S19A10	
478		A1U	TRANSISTOR		Q7757	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S19A10	
479		A1U	TRANSISTOR		Q7758	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S19A10	
480		A1U	TRANSISTOR		Q8510	8-729-046-04	TRANSISTOR FDS6690A	KLV-S19A10	
481		A1U	TRANSISTOR		Q8511	8-729-046-04	TRANSISTOR FDS6690A	KLV-S19A10	
482		A1U	TRANSISTOR		Q8552	8-729-907-00	TRANSISTOR DTC114EU	KLV-S19A10	
483		A1U	TRANSISTOR		Q8555	8-729-907-00	TRANSISTOR DTC114EU	KLV-S19A10	
484		A1U	TRANSISTOR		Q8556	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	KLV-S19A10	
485		A1U	TRANSISTOR		Q8562	8-729-907-00	TRANSISTOR DTC114EU	KLV-S19A10	
486		A1U	TRANSISTOR		Q8563	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	KLV-S19A10	
487		A1U	TRANSISTOR		Q8615	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S19A10	
488		A1U	TRANSISTOR		Q8616	8-729-907-00	TRANSISTOR DTC114EU	KLV-S19A10	
489		A1U	RESISTOR		R2501	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
490		A1U	RESISTOR		R2502	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
491		A1U	RESISTOR		R2506	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
492		A1U	RESISTOR		R2507	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
493		A1U	RESISTOR		R2508	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S19A10	
494		A1U	RESISTOR		R2510	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S19A10	
495		A1U	RESISTOR		R2514	1-216-806-11	METAL CHIP 56 5% 1/10W	KLV-S19A10	
496		A1U	RESISTOR		R2515	1-216-806-11	METAL CHIP 56 5% 1/10W	KLV-S19A10	
497		A1U	RESISTOR		R2516	1-216-806-11	METAL CHIP 56 5% 1/10W	KLV-S19A10	
498		A1U	RESISTOR		R2532	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S19A10	
499		A1U	RESISTOR		R2533	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
500		A1U	RESISTOR		R2534	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S19A10	
501		A1U	RESISTOR		R2536	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
502		A1U	RESISTOR		R2537	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S19A10	
503		A1U	RESISTOR		R2540	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
504		A1U	RESISTOR		R2546	1-216-843-11	METAL CHIP 68K 5% 1/10W	KLV-S19A10	
505		A1U	RESISTOR		R2550	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S19A10	
506		A1U	RESISTOR		R2552	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
507		A1U	RESISTOR		R2554	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S19A10	
508		A1U	RESISTOR		R2555	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S19A10	
509		A1U	RESISTOR		R2556	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S19A10	
510		A1U	RESISTOR		R2559	1-216-843-11	METAL CHIP 68K 5% 1/10W	KLV-S19A10	
511		A1U	RESISTOR		R2560	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S19A10	
512		A1U	RESISTOR		R2562	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
513		A1U	RESISTOR		R2564	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
514		A1U	RESISTOR		R2565	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
515		A1U	RESISTOR		R2567	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
516		A1U	RESISTOR		R2569	1-216-861-11	METAL CHIP 2.2M 5% 1/10W	KLV-S19A10	
517		A1U	RESISTOR		R2573	1-216-861-11	METAL CHIP 2.2M 5% 1/10W	KLV-S19A10	
518		A1U	RESISTOR		R2577	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
519		A1U	RESISTOR		R2578	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
520		A1U	RESISTOR		R2579	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
521		A1U	RESISTOR		R2580	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S19A10	
522		A1U	RESISTOR		R2581	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
523		A1U	RESISTOR		R2582	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S19A10	
524		A1U	RESISTOR		R2583	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
525		A1U	RESISTOR		R2596	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
526		A1U	RESISTOR		R2597	1-216-815-11	METAL CHIP 330 5% 1/10W	KLV-S19A10	
527		A1U	RESISTOR		R2801	1-218-849-11	METAL CHIP 1.2K 0.5% 1/10W	KLV-S19A10	
528		A1U	RESISTOR		R2802	1-218-851-11	METAL CHIP 1.5K 0.5% 1/10W	KLV-S19A10	
529		A1U	RESISTOR		R2803	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
530		A1U	RESISTOR		R2804	1-216-813-11	METAL CHIP 220 5% 1/10W	KLV-S19A10	
531		A1U	RESISTOR		R2805	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
532		A1U	RESISTOR		R2806	1-218-689-11	METAL CHIP 750 0.5% 1/10W	KLV-S19A10	
533		A1U	RESISTOR		R2807	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
534		A1U	RESISTOR		R2817	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
535		A1U	RESISTOR		R7001	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
536		A1U	RESISTOR		R7002	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S19A10	
537		A1U	RESISTOR		R7003	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S19A10	
538		A1U	RESISTOR		R7004	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
539		A1U	RESISTOR		R7005	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
540		A1U	RESISTOR		R7006	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
541		A1U	RESISTOR		R7007	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
542		A1U	RESISTOR		R7008	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
543		A1U	RESISTOR		R7028	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
544		A1U	RESISTOR		R7029	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
545		A1U	RESISTOR		R7101	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
546		A1U	RESISTOR		R7102	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
547		A1U	RESISTOR		R7103	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
548		A1U	RESISTOR		R7104	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
549		A1U	RESISTOR		R7105	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
550		A1U	RESISTOR		R7106	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
551		A1U	RESISTOR		R7107	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
552		A1U	RESISTOR		R7108	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
553		A1U	RESISTOR		R7113	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S19A10	
554		A1U	RESISTOR		R7114	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S19A10	
555		A1U	RESISTOR		R7117	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
556		A1U	RESISTOR		R7118	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
557		A1U	RESISTOR		R7122	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
558		A1U	RESISTOR		R7123	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
559		A1U	RESISTOR		R7124	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
560		A1U	RESISTOR		R7125	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
561		A1U	RESISTOR		R7126	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
562		A1U	RESISTOR		R7127	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
563		A1U	RESISTOR		R7313	1-218-856-11	METAL CHIP 2.4K 0.5% 1/10W	KLV-S19A10	
564		A1U	RESISTOR		R7314	1-218-856-11	METAL CHIP 2.4K 0.5% 1/10W	KLV-S19A10	
565		A1U	RESISTOR		R7315	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S19A10	
566		A1U	RESISTOR		R7316	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S19A10	
567		A1U	RESISTOR		R7317	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
568		A1U	RESISTOR		R7318	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
569		A1U	RESISTOR		R7320	1-218-292-11	METAL CHIP 20K 5% 1/10W	KLV-S19A10	
570		A1U	RESISTOR		R7321	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S19A10	
571		A1U	RESISTOR		R7322	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S19A10	
572		A1U	RESISTOR		R7323	1-218-292-11	METAL CHIP 20K 5% 1/10W	KLV-S19A10	
573		A1U	RESISTOR		R7324	1-218-292-11	METAL CHIP 20K 5% 1/10W	KLV-S19A10	
574		A1U	RESISTOR		R7325	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
575		A1U	RESISTOR		R7401	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
576		A1U	RESISTOR		R7402	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S19A10	
577		A1U	RESISTOR		R7409	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
578		A1U	RESISTOR		R7412	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
579		A1U	RESISTOR		R7423	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S19A10	
580		A1U	RESISTOR		R7424	1-218-889-11	METAL CHIP 56K 0.5% 1/10W	KLV-S19A10	
581		A1U	RESISTOR		R7425	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S19A10	
582		A1U	RESISTOR		R7431	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
583		A1U	RESISTOR		R7432	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
584		A1U	RESISTOR		R7437	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S19A10	
585		A1U	RESISTOR		R7438	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S19A10	
586		A1U	RESISTOR		R7439	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S19A10	
587		A1U	RESISTOR		R7440	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S19A10	
588		A1U	RESISTOR		R7443	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
589		A1U	RESISTOR		R7445	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
590		A1U	RESISTOR		R7447	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
591		A1U	RESISTOR		R7451	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
592		A1U	RESISTOR		R7452	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
593		A1U	RESISTOR		R7453	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
594		A1U	RESISTOR		R7454	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
595		A1U	RESISTOR		R7455	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S19A10	
596		A1U	RESISTOR		R7456	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S19A10	
597		A1U	RESISTOR		R7459	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S19A10	
598		A1U	RESISTOR		R7460	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S19A10	
599		A1U	RESISTOR		R7601	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
600		A1U	RESISTOR		R7603	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S19A10	
601		A1U	RESISTOR		R7604	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S19A10	
602		A1U	RESISTOR		R7606	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
603		A1U	RESISTOR		R7607	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
604		A1U	RESISTOR		R7608	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
605		A1U	RESISTOR		R7609	1-218-873-11	METAL CHIP 12K 0.5% 1/10W	KLV-S19A10	
606		A1U	RESISTOR		R7610	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
607		A1U	RESISTOR		R7611	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
608		A1U	RESISTOR		R7612	1-216-839-11	METAL CHIP 33K 5% 1/10W	KLV-S19A10	
609		A1U	RESISTOR		R7613	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	KLV-S19A10	
610		A1U	RESISTOR		R7614	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	KLV-S19A10	
611		A1U	RESISTOR		R7615	1-216-839-11	METAL CHIP 33K 5% 1/10W	KLV-S19A10	
612		A1U	RESISTOR		R7616	1-216-813-11	METAL CHIP 220 5% 1/10W	KLV-S19A10	
613		A1U	RESISTOR		R7617	1-216-813-11	METAL CHIP 220 5% 1/10W	KLV-S19A10	
614		A1U	RESISTOR		R7619	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
615		A1U	RESISTOR		R7620	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
616		A1U	RESISTOR		R7621	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
617		A1U	RESISTOR		R7622	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
618		A1U	RESISTOR		R7623	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
619		A1U	RESISTOR		R7624	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
620		A1U	RESISTOR		R7726	1-218-873-11	METAL CHIP 12K 0.5% 1/10W	KLV-S19A10	
621		A1U	RESISTOR		R7727	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
622		A1U	RESISTOR		R7728	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S19A10	
623		A1U	RESISTOR		R7729	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S19A10	
624		A1U	RESISTOR		R7730	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S19A10	
625		A1U	RESISTOR		R7731	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S19A10	
626		A1U	RESISTOR		R7732	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S19A10	
627		A1U	RESISTOR		R7733	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S19A10	
628		A1U	RESISTOR		R7734	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W	KLV-S19A10	
629		A1U	RESISTOR		R7735	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W	KLV-S19A10	
630		A1U	RESISTOR		R7736	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S19A10	
631		A1U	RESISTOR		R7740	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
632		A1U	RESISTOR		R7741	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
633		A1U	RESISTOR		R7742	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S19A10	
634		A1U	RESISTOR		R7743	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
635		A1U	RESISTOR		R7744	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
636		A1U	RESISTOR		R7759	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S19A10	
637		A1U	RESISTOR		R7760	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S19A10	
638		A1U	RESISTOR		R7761	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
639		A1U	RESISTOR		R7762	1-218-873-11	METAL CHIP 12K 0.5% 1/10W	KLV-S19A10	
640		A1U	RESISTOR		R7763	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
641		A1U	RESISTOR		R7764	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S19A10	
642		A1U	RESISTOR		R7765	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
643		A1U	RESISTOR		R7766	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
644		A1U	RESISTOR		R7767	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
645		A1U	RESISTOR		R7768	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S19A10	
646		A1U	RESISTOR		R7769	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S19A10	
647		A1U	RESISTOR		R7770	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
648		A1U	RESISTOR		R7771	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
649		A1U	RESISTOR		R7772	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S19A10	
650		A1U	RESISTOR		R7773	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S19A10	
651		A1U	RESISTOR		R7774	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S19A10	
652		A1U	RESISTOR		R7775	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S19A10	
653		A1U	RESISTOR		R7776	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S19A10	
654		A1U	RESISTOR		R7777	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
655		A1U	RESISTOR		R7778	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
656		A1U	RESISTOR		R7779	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
657		A1U	RESISTOR		R7780	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
658		A1U	RESISTOR		R7781	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
659		A1U	RESISTOR		R7782	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
660		A1U	RESISTOR		R7783	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
661		A1U	RESISTOR		R7787	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
662		A1U	RESISTOR		R7789	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
663		A1U	RESISTOR		R7790	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S19A10	
664		A1U	RESISTOR		R7791	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S19A10	
665		A1U	RESISTOR		R7792	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
666		A1U	RESISTOR		R7793	1-216-864-11	SHORT CHIP 0	KLV-S19A10	

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
667		A1U	RESISTOR		R7794	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
668		A1U	RESISTOR		R7795	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
669		A1U	RESISTOR		R7799	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
670		A1U	RESISTOR		R7800	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
671		A1U	RESISTOR		R7801	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
672		A1U	RESISTOR		R7802	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
673		A1U	RESISTOR		R7803	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
674		A1U	RESISTOR		R7804	1-218-898-11	METAL CHIP 130K 0.5% 1/10W	KLV-S19A10	
675		A1U	RESISTOR		R7805	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
676		A1U	RESISTOR		R7806	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
677		A1U	RESISTOR		R7807	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
678		A1U	RESISTOR		R7808	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
679		A1U	RESISTOR		R7809	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
680		A1U	RESISTOR		R7810	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
681		A1U	RESISTOR		R7811	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
682		A1U	RESISTOR		R7812	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
683		A1U	RESISTOR		R7813	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
684		A1U	RESISTOR		R7814	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
685		A1U	RESISTOR		R7831	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
686		A1U	RESISTOR		R8437	1-218-692-11	METAL CHIP 1K 0.5% 1/10W	KLV-S19A10	
687		A1U	RESISTOR		R8438	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S19A10	
688		A1U	RESISTOR		R8439	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S19A10	
689		A1U	RESISTOR		R8504	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S19A10	
690		A1U	RESISTOR		R8505	1-218-849-11	METAL CHIP 1.2K 0.5% 1/10W	KLV-S19A10	
691		A1U	RESISTOR		R8508	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
692		A1U	RESISTOR		R8510	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
693		A1U	RESISTOR		R8511	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W	KLV-S19A10	
694		A1U	RESISTOR		R8512	1-218-839-11	METAL CHIP 470 0.5% 1/10W	KLV-S19A10	
695		A1U	RESISTOR		R8530	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
696		A1U	RESISTOR		R8531	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
697		A1U	RESISTOR		R8553	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
698		A1U	RESISTOR		R8554	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
699		A1U	RESISTOR		R8556	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
700		A1U	RESISTOR		R8557	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
701		A1U	RESISTOR		R8560	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S19A10	
702		A1U	RESISTOR		R8561	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W	KLV-S19A10	
703		A1U	RESISTOR		R8565	1-218-889-11	METAL CHIP 56K 0.5% 1/10W	KLV-S19A10	
704		A1U	RESISTOR		R8569	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
705		A1U	RESISTOR		R8572	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
706		A1U	RESISTOR		R8573	1-218-881-11	METAL CHIP 27K 0.5% 1/10W	KLV-S19A10	
707		A1U	RESISTOR		R8574	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
708		A1U	RESISTOR		R8575	1-218-877-11	METAL CHIP 18K 0.5% 1/10W	KLV-S19A10	
709		A1U	RESISTOR		R8579	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S19A10	
710		A1U	RESISTOR		R8582	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
711		A1U	RESISTOR		R8585	1-218-851-11	METAL CHIP 1.5K 0.5% 1/10W	KLV-S19A10	
712		A1U	RESISTOR		R8586	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
713		A1U	RESISTOR		R8587	1-216-843-11	METAL CHIP 68K 5% 1/10W	KLV-S19A10	
714		A1U	RESISTOR		R8588	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
715		A1U	RESISTOR		R8589	1-216-847-11	METAL CHIP 150K 5% 1/10W	KLV-S19A10	
716		A1U	RESISTOR		R8590	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S19A10	
717		A1U	RESISTOR		R8591	1-216-839-11	METAL CHIP 33K 5% 1/10W	KLV-S19A10	
718		A1U	RESISTOR		R8592	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
719		A1U	RESISTOR		R8594	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W	KLV-S19A10	
720		A1U	RESISTOR		R8605	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S19A10	
721		A1U	RESISTOR		R8614	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S19A10	
722		A1U	RESISTOR		R8615	1-218-712-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S19A10	
723		A1U	RESISTOR		R8616	1-218-712-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S19A10	
724		A1U	RESISTOR		R8617	1-218-688-11	METAL CHIP 680 0.5% 1/10W	KLV-S19A10	
725		A1U	RESISTOR		R8618	1-218-688-11	METAL CHIP 680 0.5% 1/10W	KLV-S19A10	
726		A1U	RESISTOR		R8619	1-216-843-11	METAL CHIP 68K 5% 1/10W	KLV-S19A10	
727		A1U	RESISTOR		R8620	1-216-851-11	METAL CHIP 330K 5% 1/10W	KLV-S19A10	
728		A1U	RESISTOR		R8622	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
729		A1U	RESISTOR		R8623	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
730		A1U	RESISTOR		R8624	1-216-835-11	METAL CHIP 15K 5% 1/10W	KLV-S19A10	
731		A1U	RESISTOR		R8625	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
732		A1U	RESISTOR		R8633	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
733		A1U	RESISTOR		R8653	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
734		A1U	RESISTOR		R8655	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
735		A1U	RESISTOR		R8656	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
736		A1U	RESISTOR		R8658	1-216-295-91	SHORT CHIP 0	KLV-S19A10	
737		A1U	RESISTOR		R8659	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S19A10	
738		A1U	RESISTOR		R8660	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	KLV-S19A10	
739		A1U	RESISTOR		R8661	1-218-883-11	METAL CHIP 33K 0.5% 1/10W	KLV-S19A10	
740		A1U	RESISTOR		R8662	1-218-907-11	METAL CHIP 330K 0.5% 1/10W	KLV-S19A10	



No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
741		A1U	RESISTOR		R8663	1-218-913-91	METAL CHIP 560K 0.5% 1/10W	KLV-S19A10	
742		A1U	RESISTOR		R8667	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S19A10	
743		A1U	RESISTOR		R8668	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S19A10	
744		A1U	RESISTOR		R8669	1-218-881-11	METAL CHIP 27K 0.5% 1/10W	KLV-S19A10	
745		A1U	RESISTOR		R8830	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S19A10	
746		A1U	RESISTOR		R9002	1-216-849-11	METAL CHIP 220K 5% 1/10W	KLV-S19A10	
747		A1U	RESISTOR		R9003	1-216-849-11	METAL CHIP 220K 5% 1/10W	KLV-S19A10	
748		A1U	RESISTOR		R9004	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
749		A1U	RESISTOR		R9005	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
750		A1U	RESISTOR		R9006	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
751		A1U	RESISTOR		R9007	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
752		A1U	RESISTOR		R9009	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
753		A1U	RESISTOR		R9010	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S19A10	
754		A1U	RESISTOR		R9011	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
755		A1U	RESISTOR		R9012	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
756		A1U	RESISTOR		R9013	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S19A10	
757		A1U	RESISTOR		R9014	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
758		A1U	RESISTOR		R9015	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
759		A1U	RESISTOR		R9016	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
760		A1U	RESISTOR		R9017	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
761		A1U	RESISTOR		R9018	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
762		A1U	RESISTOR		R9019	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
763		A1U	RESISTOR		R9021	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
764		A1U	RESISTOR		R9023	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
765		A1U	RESISTOR		R9024	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
766		A1U	RESISTOR		R9026	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
767		A1U	RESISTOR		R9030	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
768		A1U	RESISTOR		R9047	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
769		A1U	RESISTOR		R9048	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
770		A1U	RESISTOR		R9049	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
771		A1U	RESISTOR		R9050	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
772		A1U	RESISTOR		R9051	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
773		A1U	RESISTOR		R9052	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
774		A1U	RESISTOR		R9053	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
775		A1U	RESISTOR		R9054	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
776		A1U	RESISTOR		R9055	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
777		A1U	RESISTOR		R9056	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
778		A1U	RESISTOR		R9103	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
779		A1U	RESISTOR		R9104	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S19A10	
780		A1U	RESISTOR		R9105	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
781		A1U	RESISTOR		R9108	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
782		A1U	RESISTOR		R9109	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S19A10	
783		A1U	RESISTOR		R9112	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
784		A1U	RESISTOR		R9113	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
785		A1U	RESISTOR		R9114	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
786		A1U	RESISTOR		R9115	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
787		A1U	RESISTOR		R9116	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S19A10	
788		A1U	RESISTOR		R9120	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
789		A1U	RESISTOR		R9121	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
790		A1U	RESISTOR		R9122	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
791		A1U	RESISTOR		R9123	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
792		A1U	RESISTOR		R9124	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
793		A1U	RESISTOR		R9125	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
794		A1U	RESISTOR		R9126	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
795		A1U	RESISTOR		R9127	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
796		A1U	RESISTOR		R9132	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
797		A1U	RESISTOR		R9133	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
798		A1U	RESISTOR		R9134	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
799		A1U	RESISTOR		R9135	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
800		A1U	RESISTOR		R9136	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
801		A1U	RESISTOR		R9137	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
802		A1U	RESISTOR		R9138	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
803		A1U	RESISTOR		R9139	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S19A10	
804		A1U	RESISTOR		R9308	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S19A10	
805		A1U	RESISTOR		R9309	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S19A10	
806		A1U	RESISTOR		R9310	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S19A10	
807		A1U	RESISTOR		R9327	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
808		A1U	RESISTOR		R9329	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S19A10	
809		A1U	RESISTOR		R9401	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
810		A1U	RESISTOR		R9402	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
811		A1U	RESISTOR		R9403	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
812		A1U	RESISTOR		R9404	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
813		A1U	RESISTOR		R9406	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
814		A1U	RESISTOR		R9407	1-216-864-11	SHORT CHIP 0	KLV-S19A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
815		A1U	RESISTOR		R9408	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
816		A1U	RESISTOR		R9409	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
817		A1U	RESISTOR		R9411	1-216-864-11	SHORT CHIP 0	KLV-S19A10	
818		A1U	RESISTOR		R9474	1-218-889-11	METAL CHIP 56K 0.5% 1/10W	KLV-S19A10	
819		A1U	RESISTOR		R9479	1-218-883-11	METAL CHIP 33K 0.5% 1/10W	KLV-S19A10	
820		A1U	VARISTOR		VD7601	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
821		A1U	VARISTOR		VD7750	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S19A10	
822		A1U	VARISTOR		VD7751	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S19A10	
823		A1U	VARISTOR		VD7752	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S19A10	
824		A1U	VARISTOR		VD7753	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S19A10	
825		A1U	VARISTOR		VD9001	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
826		A1U	VARISTOR		VD9002	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
827		A1U	VARISTOR		VD9003	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
828		A1U	VARISTOR		VD9004	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
829		A1U	VARISTOR		VD9005	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
830		A1U	VARISTOR		VD9006	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
831		A1U	VARISTOR		VD9007	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
832		A1U	VARISTOR		VD9009	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
833		A1U	VARISTOR		VD9011	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
834		A1U	VARISTOR		VD9013	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
835		A1U	VARISTOR		VD9015	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
836		A1U	VARISTOR		VD9017	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
837		A1U	VARISTOR		VD9022	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
838		A1U	VARISTOR		VD9023	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
839		A1U	VARISTOR		VD9024	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
840		A1U	VARISTOR		VD9050	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
841		A1U	VARISTOR		VD9051	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
842		A1U	VARISTOR		VD9052	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
843		A1U	VARISTOR		VD9053	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
844		A1U	VARISTOR		VD9056	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
845		A1U	VARISTOR		VD9057	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
846		A1U	VARISTOR		VD9058	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
847		A1U	VARISTOR		VD9059	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
848		A1U	VARISTOR		VD9060	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
849		A1U	VARISTOR		VD9061	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
850		A1U	VARISTOR		VD9851	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S19A10	
851		A1U	VARISTOR		VD9852	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S19A10	
852		A1U	VARISTOR		VD9853	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S19A10	
853		A1U	CRYSTAL		X2501	1-781-922-21	VIBRATOR, CERAMIC	KLV-S19A10	
854		H3	CAPACITOR		C9902	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V		
855		H3	CAPACITOR		C9904	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
856		H3	CAPACITOR		C9905	1-119-667-11	CERAMIC CHIP 22UF 10V		
857		H3	CAPACITOR		C9907	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
858		H3	CAPACITOR		C9908	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
859		H3	CONNECTOR		CN9901	1-784-254-11	CONNECTOR 10P		
860		H3	DIODE		D9903	6-500-861-01	DIODE SML-020MVT-T86		
861		H3	DIODE		D9906	6-500-861-01	DIODE SML-020MVT-T86		
862		H3	DIODE		D9909	8-719-036-94	DIODE RD5.6SB-T1		
863		H3	DIODE		D9912	8-719-064-07	DIODE SML-310LT86		
864		H3	IC		IC9901	6-600-271-01	IC RPM7140-H8		
865		H3	IC		IC9902	6-600-418-01	IC TPS851(A.SONY)		
866		H3	TRANSISTOR		Q9902	8-729-907-00	TRANSISTOR DTC114EU		
867		H3	TRANSISTOR		Q9903	8-729-907-00	TRANSISTOR DTC114EU		
868		H3	TRANSISTOR		Q9904	8-729-907-00	TRANSISTOR DTC114EU		
869		H3	TRANSISTOR		Q9905	8-729-907-00	TRANSISTOR DTC114EU		
870		H3	TRANSISTOR		Q9906	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR		
871		H3	TRANSISTOR		Q9907	8-729-907-00	TRANSISTOR DTC114EU		
872		H3	RESISTOR		R9902	1-216-818-11	METAL CHIP 560 5% 1/10W		
873		H3	RESISTOR		R9903	1-216-817-11	METAL CHIP 470 5% 1/10W		
874		H3	RESISTOR		R9904	1-216-818-11	METAL CHIP 560 5% 1/10W		
875		H3	RESISTOR		R9906	1-216-823-11	METAL CHIP 1.5K 5% 1/10W		
876		H3	RESISTOR		R9907	1-216-817-11	METAL CHIP 470 5% 1/10W		
877		H3	RESISTOR		R9908	1-216-805-11	METAL CHIP 47 5% 1/10W		
878		H3	RESISTOR		R9910	1-216-821-11	METAL CHIP 1K 5% 1/10W		
879		H3	RESISTOR		R9911	1-216-839-11	METAL CHIP 33K 5% 1/10W		
880		H3	RESISTOR		R9912	1-216-833-11	METAL CHIP 10K 5% 1/10W		
881		H3	RESISTOR		R9914	1-216-849-11	METAL CHIP 220K 5% 1/10W		
882		H3	RESISTOR		R9915	1-216-849-11	METAL CHIP 220K 5% 1/10W		
883		H3	RESISTOR		R9916	1-216-827-11	METAL CHIP 3.3K 5% 1/10W		
884		H3	RESISTOR		R9917	1-216-817-11	METAL CHIP 470 5% 1/10W		
885		H3	RESISTOR		R9918	1-216-864-11	SHORT CHIP 0		
886		P	CAPACITOR		C5000	1-126-193-11	ELECT CHIP 1UF 20.00% 50V		
887		P	CAPACITOR		C5001	1-126-193-11	ELECT CHIP 1UF 20.00% 50V		
888		P	CAPACITOR		C5002	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
889		P	CAPACITOR		C5003	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
890		P	CAPACITOR		C5004	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
891		P	CAPACITOR		C5005	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
892		P	CAPACITOR		C5006	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
893		P	CAPACITOR		C5007	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
894		P	CAPACITOR		C5008	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
895		P	CAPACITOR		C5009	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
896		P	CAPACITOR		C5010	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
897		P	CAPACITOR		C5011	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
898		P	CAPACITOR		C5012	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
899		P	CAPACITOR		C5013	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
900		P	CAPACITOR		C5014	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
901		P	CAPACITOR		C5015	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
902		P	CAPACITOR		C5016	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
903		P	CAPACITOR		C5017	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
904		P	CAPACITOR		C5018	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
905		P	CAPACITOR		C5019	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
906		P	CAPACITOR		C5020	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
907		P	CAPACITOR		C5021	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
908		P	CAPACITOR		C5022	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
909		P	CAPACITOR		C5023	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
910		P	CAPACITOR		C5024	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
911		P	CAPACITOR		C5025	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
912		P	CAPACITOR		C5026	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
913		P	CAPACITOR		C5027	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
914		P	CAPACITOR		C5028	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
915		P	CAPACITOR		C5100	1-100-588-21	ELECT CHIP 1000UF 20% 6.3V		
916		P	CAPACITOR		C5102	1-137-897-21	ELECT CHIP 150UF 20% 4V		
917		P	CAPACITOR		C5103	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
918		P	CAPACITOR		C5104	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
919		P	CAPACITOR		C5105	1-100-118-21	ELECT CHIP 82UF 20% 16V		
920		P	CAPACITOR		C5107	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
921		P	CAPACITOR		C5108	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
922		P	CAPACITOR		C5200	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
923		P	CAPACITOR		C5201	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
924		P	CAPACITOR		C5202	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
925		P	CAPACITOR		C5203	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
926		P	CAPACITOR		C5204	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
927		P	CAPACITOR		C5205	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
928		P	CAPACITOR		C5206	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
929		P	CAPACITOR		C5207	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
930		P	CAPACITOR		C5208	1-128-993-21	ELECT CHIP 22UF 20% 10V		
931		P	CAPACITOR		C5209	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
932		P	CAPACITOR		C5210	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
933		P	CAPACITOR		C5211	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V		
934		P	CAPACITOR		C5212	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
935		P	CAPACITOR		C5213	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
936		P	CAPACITOR		C5214	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
937		P	CAPACITOR		C5215	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
938		P	CAPACITOR		C5216	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
939		P	CAPACITOR		C5217	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
940		P	CAPACITOR		C5218	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
941		P	CAPACITOR		C5219	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
942		P	CAPACITOR		C5220	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
943		P	CAPACITOR		C5221	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V		
944		P	CAPACITOR		C5222	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
945		P	CAPACITOR		C5223	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
946		P	CAPACITOR		C5224	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
947		P	CAPACITOR		C5225	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
948		P	CAPACITOR		C5226	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
949		P	CAPACITOR		C5227	1-128-993-21	ELECT CHIP 22UF 20% 10V		
950		P	CAPACITOR		C5228	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
951		P	CAPACITOR		C5229	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
952		P	CAPACITOR		C5230	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
953		P	CAPACITOR		C5231	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
954		P	CAPACITOR		C5232	1-128-993-21	ELECT CHIP 22UF 20% 10V		
955		P	CAPACITOR		C5233	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
956		P	CAPACITOR		C5234	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
957		P	CAPACITOR		C5300	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
958		P	CAPACITOR		C5301	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
959		P	CAPACITOR		C5302	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
960		P	CAPACITOR		C5303	1-162-916-11	CERAMIC CHIP 12PF 5.00% 50V		
961		P	CAPACITOR		C5304	1-162-916-11	CERAMIC CHIP 12PF 5.00% 50V		
962		P	CONNECTOR	*	CN5000	1-818-400-11	HDMI CONNECTOR		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
963		P	CONNECTOR		CN5002	1-794-519-21	PIN, CONNECTOR (PC BOARD) 14P		
964		P	DIODE		D5001	8-719-977-28	DIODE DTZ10B		
965		P	DIODE		D5003	8-719-977-28	DIODE DTZ10B		
966		P	DIODE		D5006	8-719-074-43	DIODE BAS316-115		
967		P	DIODE		D5007	8-719-074-43	DIODE BAS316-115		
968		P	DIODE		D5100	6-500-294-01	DIODE PTZ-TE25-3.9B		
969		P	DIODE		D5101	8-719-210-39	DIODE EC10QS-04		
970		P	FERRITE BEAD		FB5000	1-414-235-22	FERRITE 0UH		
971		P	FERRITE BEAD		FB5001	1-414-235-22	FERRITE 0UH		
972		P	FERRITE BEAD		FB5002	1-414-235-22	FERRITE 0UH		
973		P	FERRITE BEAD		FB5003	1-414-235-22	FERRITE 0UH		
974		P	FERRITE BEAD		FB5004	1-414-445-11	FERRITE 0UH		
975		P	FERRITE BEAD		FB5200	1-414-235-22	FERRITE 0UH		
976		P	FERRITE BEAD		FB5201	1-414-235-22	FERRITE 0UH		
977		P	FERRITE BEAD		FB5202	1-414-235-22	FERRITE 0UH		
978		P	FERRITE BEAD		FB5203	1-414-235-22	FERRITE 0UH		
979		P	FILTER	*	FL5000	1-813-308-11	INDUCTOR 0UH		
980		P	FILTER	*	FL5001	1-813-308-11	INDUCTOR 0UH		
981		P	FILTER	*	FL5002	1-813-308-11	INDUCTOR 0UH		
982		P	FILTER	*	FL5003	1-813-308-11	INDUCTOR 0UH		
983		P	FILTER		FL5004	1-234-177-21	FERRITE 0UH		
984		P	IC		IC5000	6-704-001-01	IC BR24L02F-WE2		
985		P	IC		IC5001	6-704-499-01	IC SII9993CTG100		
986		P	IC		IC5100	6-704-407-01	IC PQ1CZ41H2ZPH		
987		P	IC		IC5101	8-759-533-85	IC L88M05T-FA-TL		
988		P	IC		IC5200	6-704-819-01	IC CS4335-KSZR		
989		P	IC		IC5201	6-706-257-01	IC FMS6418AM16X		
990		P	IC		IC5202	8-759-382-59	IC RC4558DR		
991		P	IC		IC5203	6-703-042-01	IC CD4052BNSR		
992		P	IC		IC5301	6-804-249-01	IC HD6433692A39FXV		
993		P	JACK		J5000	1-794-623-21	JACK, PIN 2P		
994		P	COIL		L5001	1-412-026-11	INDUCTOR 1UH		
995		P	COIL		L5100	1-456-046-21	INDUCTOR 10UH		
996		P	COIL		L5101	1-400-303-21	INDUCTOR 68UH		
997		P	IC LINK	△	PS5100	1-576-612-21	FUSE 1A 32V		
998		P	IC LINK	△	PS5101	1-576-647-11	FUSE 0.2A 50V		
999		P	TRANSISTOR		Q5000	8-729-421-22	TRANSISTOR UN2211		
1000		P	TRANSISTOR		Q5001	6-550-014-01	TRANSISTOR SSM6N15FU(TE85R)		
1001		P	TRANSISTOR		Q5002	8-729-421-22	TRANSISTOR UN2211		
1002		P	TRANSISTOR		Q5200	8-729-027-62	TRANSISTOR DTC144WKA-T146		
1003		P	TRANSISTOR		Q5201	8-729-024-88	TRANSISTOR MUN2212T1		
1004		P	TRANSISTOR		Q5202	8-729-024-88	TRANSISTOR MUN2212T1		
1005		P	TRANSISTOR		Q5204	8-729-421-22	TRANSISTOR UN2211		
1006		P	TRANSISTOR		Q5205	8-729-421-22	TRANSISTOR UN2211		
1007		P	TRANSISTOR		Q5300	8-729-027-62	TRANSISTOR DTC144WKA-T146		
1008		P	RESISTOR		R5000	1-218-644-11	METAL CHIP 10 0.5% 1/10W		
1009		P	RESISTOR		R5001	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1010		P	RESISTOR		R5002	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1011		P	RESISTOR		R5003	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1012		P	RESISTOR		R5006	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1013		P	RESISTOR		R5009	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1014		P	RESISTOR		R5010	1-216-809-11	METAL CHIP 100 5% 1/10W		
1015		P	RESISTOR		R5011	1-216-809-11	METAL CHIP 100 5% 1/10W		
1016		P	RESISTOR		R5012	1-216-809-11	METAL CHIP 100 5% 1/10W		
1017		P	RESISTOR		R5013	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1018		P	RESISTOR		R5015	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1019		P	RESISTOR		R5017	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1020		P	RESISTOR		R5019	1-216-816-11	METAL CHIP 390 5% 1/10W		
1021		P	RESISTOR		R5020	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1022		P	RESISTOR		R5021	1-218-854-11	METAL CHIP 2K 0.5% 1/10W		
1023		P	RESISTOR		R5022	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
1024		P	RESISTOR		R5023	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1025		P	RESISTOR		R5024	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1026		P	RESISTOR		R5025	1-216-803-11	METAL CHIP 33 5% 1/10W		
1027		P	RESISTOR		R5026	1-216-803-11	METAL CHIP 33 5% 1/10W		
1028		P	RESISTOR		R5027	1-216-803-11	METAL CHIP 33 5% 1/10W		
1029		P	RESISTOR		R5103	1-218-701-11	METAL CHIP 2.4K 0.5% 1/10W		
1030		P	RESISTOR		R5104	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
1031		P	RESISTOR		R5105	1-216-864-11	SHORT CHIP 0		
1032		P	RESISTOR		R5106	1-216-864-11	SHORT CHIP 0		
1033		P	RESISTOR		R5201	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1034		P	RESISTOR		R5202	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1035		P	RESISTOR		R5203	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1036		P	RESISTOR		R5204	1-218-665-11	METAL CHIP 75 0.5% 1/10W		

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1037		P	RESISTOR		R5205	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1038		P	RESISTOR		R5206	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1039		P	RESISTOR		R5207	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1040		P	RESISTOR		R5209	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1041		P	RESISTOR		R5212	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1042		P	RESISTOR		R5213	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1043		P	RESISTOR		R5214	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1044		P	RESISTOR		R5215	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1045		P	RESISTOR		R5216	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1046		P	RESISTOR		R5217	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1047		P	RESISTOR		R5218	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1048		P	RESISTOR		R5219	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1049		P	RESISTOR		R5222	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1050		P	RESISTOR		R5223	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1051		P	RESISTOR		R5225	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1052		P	RESISTOR		R5227	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1053		P	RESISTOR		R5231	1-218-694-11	METAL CHIP 1.2K 0.5% 1/10W		
1054		P	RESISTOR		R5232	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1055		P	RESISTOR		R5233	1-218-716-11	METAL CHIP 10K 0.5% 1/10W		
1056		P	RESISTOR		R5234	1-216-841-11	METAL CHIP 47K 5% 1/10W		
1057		P	RESISTOR		R5235	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1058		P	RESISTOR		R5236	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1059		P	RESISTOR		R5237	1-218-686-11	METAL CHIP 560 0.5% 1/10W		
1060		P	RESISTOR		R5238	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1061		P	RESISTOR		R5239	1-218-694-11	METAL CHIP 1.2K 0.5% 1/10W		
1062		P	RESISTOR		R5240	1-218-716-11	METAL CHIP 10K 0.5% 1/10W		
1063		P	RESISTOR		R5241	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1064		P	RESISTOR		R5242	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1065		P	RESISTOR		R5243	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
1066		P	RESISTOR		R5244	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1067		P	RESISTOR		R5245	1-218-686-11	METAL CHIP 560 0.5% 1/10W		
1068		P	RESISTOR		R5247	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1069		P	RESISTOR		R5248	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1070		P	RESISTOR		R5249	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1071		P	RESISTOR		R5250	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1072		P	RESISTOR		R5251	1-216-809-11	METAL CHIP 100 5% 1/10W		
1073		P	RESISTOR		R5252	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1074		P	RESISTOR		R5253	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1075		P	RESISTOR		R5254	1-216-817-11	METAL CHIP 470 5% 1/10W		
1076		P	RESISTOR		R5255	1-216-817-11	METAL CHIP 470 5% 1/10W		
1077		P	RESISTOR		R5258	1-216-845-11	METAL CHIP 100K 5% 1/10W		
1078		P	RESISTOR		R5259	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1079		P	RESISTOR		R5260	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1080		P	RESISTOR		R5261	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1081		P	RESISTOR		R5262	1-216-809-11	METAL CHIP 100 5% 1/10W		
1082		P	RESISTOR		R5265	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1083		P	RESISTOR		R5266	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1084		P	RESISTOR		R5302	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1085		P	RESISTOR		R5303	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1086		P	RESISTOR		R5304	1-216-809-11	METAL CHIP 100 5% 1/10W		
1087		P	RESISTOR		R5305	1-216-809-11	METAL CHIP 100 5% 1/10W		
1088		P	RESISTOR		R5306	1-216-809-11	METAL CHIP 100 5% 1/10W		
1089		P	RESISTOR		R5307	1-216-809-11	METAL CHIP 100 5% 1/10W		
1090		P	RESISTOR		R5308	1-216-809-11	METAL CHIP 100 5% 1/10W		
1091		P	RESISTOR		R5309	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1092		P	RESISTOR		R5310	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1093		P	RESISTOR		R5311	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1094		P	RESISTOR		R5312	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1095		P	RESISTOR		R5313	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1096		P	RESISTOR		R5314	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1097		P	RESISTOR		R5315	1-216-809-11	METAL CHIP 100 5% 1/10W		
1098		P	RESISTOR		R5317	1-216-809-11	METAL CHIP 100 5% 1/10W		
1099		P	RESISTOR		R5320	1-216-809-11	METAL CHIP 100 5% 1/10W		
1100		P	RESISTOR		R5321	1-216-809-11	METAL CHIP 100 5% 1/10W		
1101		P	RESISTOR		R5322	1-216-809-11	METAL CHIP 100 5% 1/10W		
1102		P	RESISTOR		R5323	1-216-809-11	METAL CHIP 100 5% 1/10W		
1103		P	RESISTOR		R5325	1-216-809-11	METAL CHIP 100 5% 1/10W		
1104		P	RESISTOR		R5326	1-216-809-11	METAL CHIP 100 5% 1/10W		
1105		P	NETWORK		RB5000	1-233-574-11	RES, CHIP NETWORK 10 (3216)		
1106		P	NETWORK		RB5001	1-233-574-11	RES, CHIP NETWORK 10 (3216)		
1107		P	NETWORK		RB5002	1-234-524-21	RES, CHIP NETWORK 33 (3216)		
1108		P	NETWORK		RB5300	1-236-908-11	RES, CHIP NETWORK 10K		
1109		P	VARISTOR		VD5000	1-805-043-11	ABSORBER, CHIP SURGE		
1110		P	VARISTOR		VD5001	1-805-043-11	ABSORBER, CHIP SURGE		

No.	#	Board	Type	$\Delta/\ast$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1111		P	VARISTOR		VD5002	1-805-043-11	ABSORBER, CHIP SURGE		
1112		P	VARISTOR		VD5003	1-805-043-11	ABSORBER, CHIP SURGE		
1113		P	VARISTOR		VD5004	1-805-043-11	ABSORBER, CHIP SURGE		
1114		P	VARISTOR		VD5005	1-805-043-11	ABSORBER, CHIP SURGE		
1115		P	VARISTOR		VD5006	1-805-043-11	ABSORBER, CHIP SURGE		
1116		P	VARISTOR		VD5007	1-805-043-11	ABSORBER, CHIP SURGE		
1117		P	VARISTOR		VD5008	1-805-043-11	ABSORBER, CHIP SURGE		
1118		P	VARISTOR		VD5009	1-805-043-11	ABSORBER, CHIP SURGE		
1119		P	CRYSTAL		X5300	1-767-984-21	VIBRATOR, CRYSTAL		
1120		TU	CAPACITOR		C6400	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1121		TU	CAPACITOR		C6401	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
1122		TU	CAPACITOR		C6402	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1123		TU	CAPACITOR		C6403	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1124		TU	CAPACITOR		C6404	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
1125		TU	CAPACITOR		C6405	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1126		TU	CAPACITOR		C6406	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1127		TU	CAPACITOR		C6407	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1128		TU	CAPACITOR		C6408	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1129		TU	CAPACITOR		C6409	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1130		TU	CAPACITOR		C6410	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1131		TU	CAPACITOR		C6411	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1132		TU	CAPACITOR		C6412	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1133		TU	CAPACITOR		C6413	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1134		TU	CAPACITOR		C6414	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1135		TU	CAPACITOR		C6415	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1136		TU	CAPACITOR		C6416	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
1137		TU	CAPACITOR		C6417	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1138		TU	CAPACITOR		C6418	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
1139		TU	CAPACITOR		C6419	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V		
1140		TU	CAPACITOR		C6420	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V		
1141		TU	CAPACITOR		C6421	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
1142		TU	CAPACITOR		C6422	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
1143		TU	CAPACITOR		C6423	1-162-995-11	CERAMIC CHIP 0.022UF 50V		
1144		TU	CAPACITOR		C6424	1-164-156-11	CERAMIC CHIP 0.1UF 25V		
1145		TU	CAPACITOR		C6425	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
1146		TU	CAPACITOR		C6426	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1147		TU	CAPACITOR		C6427	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1148		TU	CAPACITOR		C6428	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1149		TU	CAPACITOR		C6429	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1150		TU	CAPACITOR		C6430	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1151		TU	CAPACITOR		C6431	1-127-820-11	CERAMIC CHIP 4.7UF 10% 16V		
1152		TU	CONNECTOR	*	CN6401	1-764-334-11	PLUG, CONNECTOR 11P		
1153		TU	CONNECTOR		CN6402	1-695-915-11	TAB (CONTACT)		
1154		TU	CONNECTOR	*	CN6403	1-564-516-11	PLUG, CONNECTOR 13P		
1155		TU	DIODE		D6401	8-719-977-28	DIODE DTZ10B		
1156		TU	DIODE		D6402	8-719-081-97	DIODE MMDL914T1		
1157		TU	IC		IC6401	6-703-225-01	IC S-80928CNMC-G8YT2G		
1158		TU	TRANSISTOR		Q6401	6-550-585-01	TRANSISTOR 2PC4081R-115		
1159		TU	TRANSISTOR		Q6402	6-550-585-01	TRANSISTOR 2PC4081R-115		
1160		TU	TRANSISTOR		Q6403	6-550-585-01	TRANSISTOR 2PC4081R-115		
1161		TU	TRANSISTOR		Q6404	6-550-585-01	TRANSISTOR 2PC4081R-115		
1162		TU	TRANSISTOR		Q6406	6-550-586-01	TRANSISTOR 2PA1576R-115		
1163		TU	TRANSISTOR		Q6407	6-550-585-01	TRANSISTOR 2PC4081R-115		
1164		TU	TRANSISTOR		Q6408	6-550-586-01	TRANSISTOR 2PA1576R-115		
1165		TU	TRANSISTOR		Q6457	6-550-549-01	TRANSISTOR DTC114EUAFT106		
1166		TU	TRANSISTOR		Q6459	6-550-549-01	TRANSISTOR DTC114EUAFT106		
1167		TU	TRANSISTOR		Q6460	6-550-549-01	TRANSISTOR DTC114EUAFT106		
1168		TU	TRANSISTOR		Q6461	6-550-585-01	TRANSISTOR 2PC4081R-115		
1169		TU	TRANSISTOR		Q6462	6-550-586-01	TRANSISTOR 2PA1576R-115		
1170		TU	RESISTOR		R6400	1-216-864-11	SHORT CHIP 0		
1171		TU	RESISTOR		R6401	1-216-809-11	METAL CHIP 100 5% 1/10W		
1172		TU	RESISTOR		R6402	1-216-809-11	METAL CHIP 100 5% 1/10W		
1173		TU	RESISTOR		R6403	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1174		TU	RESISTOR		R6404	1-216-864-11	SHORT CHIP 0		
1175		TU	RESISTOR		R6405	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1176		TU	RESISTOR		R6409	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1177		TU	RESISTOR		R6410	1-216-839-11	METAL CHIP 33K 5% 1/10W		
1178		TU	RESISTOR		R6412	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1179		TU	RESISTOR		R6413	1-216-837-11	METAL CHIP 22K 5% 1/10W		
1180		TU	RESISTOR		R6414	1-216-809-11	METAL CHIP 100 5% 1/10W		
1181		TU	RESISTOR		R6415	1-216-809-11	METAL CHIP 100 5% 1/10W		
1182		TU	RESISTOR		R6416	1-216-864-11	SHORT CHIP 0		
1183		TU	RESISTOR		R6417	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1184		TU	RESISTOR		R6418	1-216-864-11	SHORT CHIP 0		

No.	#	Board	Type	$\Delta/\ast$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1185		TU	RESISTOR		R6420	1-216-864-11	SHORT CHIP 0		
1186		TU	RESISTOR		R6421	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1187		TU	RESISTOR		R6423	1-216-864-11	SHORT CHIP 0		
1188		TU	RESISTOR		R6424	1-216-864-11	SHORT CHIP 0		
1189		TU	RESISTOR		R6425	1-216-817-11	METAL CHIP 470 5% 1/10W		
1190		TU	RESISTOR		R6426	1-216-817-11	METAL CHIP 470 5% 1/10W		
1191		TU	RESISTOR		R6427	1-216-836-11	METAL CHIP 18K 5% 1/10W		
1192		TU	RESISTOR		R6428	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1193		TU	RESISTOR		R6430	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
1194		TU	RESISTOR		R6431	1-216-839-11	METAL CHIP 33K 5% 1/10W		
1195		TU	RESISTOR		R6432	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1196		TU	RESISTOR		R6433	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
1197		TU	RESISTOR		R6434	1-216-825-11	METAL CHIP 2.2K 5% 1/10W		
1198		TU	RESISTOR		R6435	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1199		TU	RESISTOR		R6437	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1200		TU	RESISTOR		R6438	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1201		TU	RESISTOR		R6468	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1202		TU	RESISTOR		R6469	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1203		TU	RESISTOR		R6470	1-216-833-11	METAL CHIP 10K 5% 1/10W		
1204		TU	RESISTOR		R6471	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
1205		TU	RESISTOR		R6472	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1206		TU	RESISTOR		R6473	1-216-821-11	METAL CHIP 1K 5% 1/10W		
1207		TU	RESISTOR		R6474	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1208		TU	RESISTOR		R6475	1-216-828-11	METAL CHIP 3.9K 5% 1/10W		
1209		TU	RESISTOR		R6476	1-216-826-11	METAL CHIP 2.7K 5% 1/10W		
1210		TU	RESISTOR		R6477	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1211		TU	RESISTOR		R6478	1-216-857-11	METAL CHIP 1M 5% 1/10W		
1212		TU	RESISTOR		R6479	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
1213		TU	TUNER		TU6400	8-598-593-60	TUNER, FSS BTF-WA421		
1214		H1	CAPACITOR		C9802	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1215		H1	CAPACITOR		C9803	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
1216		H1	CONNECTOR	*	CN9801	1-793-137-21	PIN, CONNECTOR 3P		
1217		H1	DIODE		D9801	8-719-036-94	DIODE RD5.6SB-T1		
1218		H1	RESISTOR		R9801	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W		
1219		H1	RESISTOR		R9802	1-218-848-11	METAL CHIP 1.1K 0.5% 1/10W		
1220		H1	RESISTOR		R9803	1-218-841-11	METAL CHIP 560 0.5% 1/10W		
1221		H1	RESISTOR		R9804	1-218-835-11	METAL CHIP 330 0.5% 1/10W		
1222		H1	RESISTOR		R9805	1-218-831-11	METAL CHIP 220 0.5% 1/10W		
1223		H1	RESISTOR		R9806	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
1224		H1	SWITCH		S9801	1-771-105-11	SWITCH, TACTILE		
1225		H1	SWITCH		S9802	1-771-105-11	SWITCH, TACTILE		
1226		H1	SWITCH		S9803	1-771-105-11	SWITCH, TACTILE		
1227		H1	SWITCH		S9804	1-771-105-11	SWITCH, TACTILE		
1228		H1	SWITCH		S9805	1-771-105-11	SWITCH, TACTILE		
1229		H1	SWITCH		S9806	1-771-105-11	SWITCH, TACTILE		
1230		H1	SWITCH		S9807	1-771-105-11	SWITCH, TACTILE		
1231		H1	SWITCH		S9808	1-771-105-11	SWITCH, TACTILE		
1232		H1	VARISTOR		VD9801	1-803-974-21	VARISTOR, CHIP (1608)		
1233		H1	VARISTOR		VD9802	1-803-974-21	VARISTOR, CHIP (1608)		
1234		H1	VARISTOR		VD9803	1-803-974-21	VARISTOR, CHIP (1608)		
1235		H1	VARISTOR		VD9804	1-803-974-21	VARISTOR, CHIP (1608)		
1236		H1	VARISTOR		VD9805	1-803-974-21	VARISTOR, CHIP (1608)		
1237		H1	VARISTOR		VD9806	1-803-974-21	VARISTOR, CHIP (1608)		
1238		H1	VARISTOR		VD9807	1-803-974-21	VARISTOR, CHIP (1608)		
1239		H1	VARISTOR		VD9808	1-803-974-21	VARISTOR, CHIP (1608)		
1240		A2U	CAPACITOR		C2518	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V	KLV-S23A10	
1241		A2U	CAPACITOR		C2519	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1242		A2U	CAPACITOR		C2520	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1243		A2U	CAPACITOR		C2525	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1244		A2U	CAPACITOR		C2526	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1245		A2U	CAPACITOR		C2527	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1246		A2U	CAPACITOR		C2528	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1247		A2U	CAPACITOR		C2529	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1248		A2U	CAPACITOR		C2530	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1249		A2U	CAPACITOR		C2531	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V	KLV-S23A10	
1250		A2U	CAPACITOR		C2532	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1251		A2U	CAPACITOR		C2533	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1252		A2U	CAPACITOR		C2534	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1253		A2U	CAPACITOR		C2535	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1254		A2U	CAPACITOR		C2536	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1255		A2U	CAPACITOR		C2538	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1256		A2U	CAPACITOR		C2539	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1257		A2U	CAPACITOR		C2540	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1258		A2U	CAPACITOR		C2541	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1259		A2U	CAPACITOR		C2543	1-126-205-11	ELECT CHIP 47UF 20.00% 6.3V	KLV-S23A10	
1260		A2U	CAPACITOR		C2544	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1261		A2U	CAPACITOR		C2549	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V	KLV-S23A10	
1262		A2U	CAPACITOR		C2550	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V	KLV-S23A10	
1263		A2U	CAPACITOR		C2553	1-126-395-11	ELECT CHIP 22UF 20.00% 16V	KLV-S23A10	
1264		A2U	CAPACITOR		C2555	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1265		A2U	CAPACITOR		C2801	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S23A10	
1266		A2U	CAPACITOR		C2802	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1267		A2U	CAPACITOR		C2803	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S23A10	
1268		A2U	CAPACITOR		C2804	1-131-661-21	ELECT CHIP 100UF 20% 10V	KLV-S23A10	
1269		A2U	CAPACITOR		C2805	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S23A10	
1270		A2U	CAPACITOR		C2811	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1271		A2U	CAPACITOR		C2812	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1272		A2U	CAPACITOR		C2813	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1273		A2U	CAPACITOR		C7002	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1274		A2U	CAPACITOR		C7005	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1275		A2U	CAPACITOR		C7007	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S23A10	
1276		A2U	CAPACITOR		C7101	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1277		A2U	CAPACITOR		C7102	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1278		A2U	CAPACITOR		C7107	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1279		A2U	CAPACITOR		C7108	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1280		A2U	CAPACITOR		C7109	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1281		A2U	CAPACITOR		C7112	1-117-681-11	ELECT CHIP 100UF 20.00% 16V	KLV-S23A10	
1282		A2U	CAPACITOR		C7113	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1283		A2U	CAPACITOR		C7115	1-117-681-11	ELECT CHIP 100UF 20.00% 16V	KLV-S23A10	
1284		A2U	CAPACITOR		C7116	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1285		A2U	CAPACITOR		C7315	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1286		A2U	CAPACITOR		C7316	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1287		A2U	CAPACITOR		C7317	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1288		A2U	CAPACITOR		C7318	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1289		A2U	CAPACITOR		C7319	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V	KLV-S23A10	
1290		A2U	CAPACITOR		C7320	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V	KLV-S23A10	
1291		A2U	CAPACITOR		C7321	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V	KLV-S23A10	
1292		A2U	CAPACITOR		C7322	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V	KLV-S23A10	
1293		A2U	CAPACITOR		C7323	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V	KLV-S23A10	
1294		A2U	CAPACITOR		C7324	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1295		A2U	CAPACITOR		C7325	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1296		A2U	CAPACITOR		C7326	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1297		A2U	CAPACITOR		C7327	1-117-681-11	ELECT CHIP 100UF 20.00% 16V	KLV-S23A10	
1298		A2U	CAPACITOR		C7328	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V	KLV-S23A10	
1299		A2U	CAPACITOR		C7329	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1300		A2U	CAPACITOR		C7330	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1301		A2U	CAPACITOR		C7331	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1302		A2U	CAPACITOR		C7333	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1303		A2U	CAPACITOR		C7334	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1304		A2U	CAPACITOR		C7335	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S23A10	
1305		A2U	CAPACITOR		C7336	1-126-603-11	ELECT CHIP 4.7UF 20.00% 35V	KLV-S23A10	
1306		A2U	CAPACITOR		C7337	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1307		A2U	CAPACITOR		C7338	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1308		A2U	CAPACITOR		C7339	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1309		A2U	CAPACITOR		C7340	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1310		A2U	CAPACITOR		C7341	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1311		A2U	CAPACITOR		C7342	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1312		A2U	CAPACITOR		C7343	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1313		A2U	CAPACITOR		C7344	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1314		A2U	CAPACITOR		C7345	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1315		A2U	CAPACITOR		C7346	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1316		A2U	CAPACITOR		C7347	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1317		A2U	CAPACITOR		C7348	1-162-967-11	CERAMIC CHIP 0.0033UF 10.00% 50V	KLV-S23A10	
1318		A2U	CAPACITOR		C7349	1-164-227-11	CERAMIC CHIP 0.022UF 10.00% 25V	KLV-S23A10	
1319		A2U	CAPACITOR		C7350	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V	KLV-S23A10	
1320		A2U	CAPACITOR		C7351	1-128-934-91	CERAMIC CHIP 0.33UF 20% 10V	KLV-S23A10	
1321		A2U	CAPACITOR		C7352	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1322		A2U	CAPACITOR		C7401	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1323		A2U	CAPACITOR		C7404	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1324		A2U	CAPACITOR		C7406	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1325		A2U	CAPACITOR		C7422	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1326		A2U	CAPACITOR		C7423	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1327		A2U	CAPACITOR		C7424	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1328		A2U	CAPACITOR		C7425	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1329		A2U	CAPACITOR		C7426	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1330		A2U	CAPACITOR		C7427	1-126-395-11	ELECT CHIP 22UF 20.00% 16V	KLV-S23A10	
1331		A2U	CAPACITOR		C7428	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1332		A2U	CAPACITOR		C7429	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	



No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1333		A2U	CAPACITOR		C7430	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1334		A2U	CAPACITOR		C7602	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1335		A2U	CAPACITOR		C7603	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1336		A2U	CAPACITOR		C7604	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V	KLV-S23A10	
1337		A2U	CAPACITOR		C7605	1-126-394-11	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1338		A2U	CAPACITOR		C7606	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1339		A2U	CAPACITOR		C7607	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S23A10	
1340		A2U	CAPACITOR		C7608	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S23A10	
1341		A2U	CAPACITOR		C7609	1-124-779-00	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1342		A2U	CAPACITOR		C7610	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V	KLV-S23A10	
1343		A2U	CAPACITOR		C7726	1-126-394-11	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1344		A2U	CAPACITOR		C7727	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1345		A2U	CAPACITOR		C7728	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1346		A2U	CAPACITOR		C7729	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1347		A2U	CAPACITOR		C7730	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1348		A2U	CAPACITOR		C7731	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1349		A2U	CAPACITOR		C7732	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1350		A2U	CAPACITOR		C7733	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V	KLV-S23A10	
1351		A2U	CAPACITOR		C7736	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1352		A2U	CAPACITOR		C7737	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1353		A2U	CAPACITOR		C7738	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1354		A2U	CAPACITOR		C7739	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1355		A2U	CAPACITOR		C7740	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1356		A2U	CAPACITOR		C7741	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1357		A2U	CAPACITOR		C7742	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1358		A2U	CAPACITOR		C7743	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1359		A2U	CAPACITOR		C7751	1-126-394-11	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1360		A2U	CAPACITOR		C7752	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1361		A2U	CAPACITOR		C7753	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1362		A2U	CAPACITOR		C7754	1-126-394-11	ELECT CHIP 10UF 20.00% 16V	KLV-S23A10	
1363		A2U	CAPACITOR		C7756	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1364		A2U	CAPACITOR		C7757	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1365		A2U	CAPACITOR		C7758	1-127-715-91	CERAMIC CHIP 0.22UF 10% 16V	KLV-S23A10	
1366		A2U	CAPACITOR		C7760	1-128-528-11	ELECT 470UF 20% 25V	KLV-S23A10	
1367		A2U	CAPACITOR		C7761	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1368		A2U	CAPACITOR		C7762	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1369		A2U	CAPACITOR		C7763	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1370		A2U	CAPACITOR		C7764	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1371		A2U	CAPACITOR		C7765	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1372		A2U	CAPACITOR		C7766	1-100-591-91	CERAMIC CHIP 1UF 10% 25V	KLV-S23A10	
1373		A2U	CAPACITOR		C7768	1-100-591-91	CERAMIC CHIP 1UF 10% 25V	KLV-S23A10	
1374		A2U	CAPACITOR		C7770	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1375		A2U	CAPACITOR		C7771	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1376		A2U	CAPACITOR		C7772	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1377		A2U	CAPACITOR		C7773	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1378		A2U	CAPACITOR		C7776	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S23A10	
1379		A2U	CAPACITOR		C7777	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S23A10	
1380		A2U	CAPACITOR		C7779	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1381		A2U	CAPACITOR		C7780	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1382		A2U	CAPACITOR		C7784	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1383		A2U	CAPACITOR		C7785	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S23A10	
1384		A2U	CAPACITOR		C7786	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S23A10	
1385		A2U	CAPACITOR		C7787	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S23A10	
1386		A2U	CAPACITOR		C7788	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1387		A2U	CAPACITOR		C7789	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1388		A2U	CAPACITOR		C7790	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1389		A2U	CAPACITOR		C7791	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1390		A2U	CAPACITOR		C7792	1-100-912-11	CERAMIC CHIP 1UF 10% 25V	KLV-S23A10	
1391		A2U	CAPACITOR		C7793	1-100-912-11	CERAMIC CHIP 1UF 10% 25V	KLV-S23A10	
1392		A2U	CAPACITOR		C7794	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1393		A2U	CAPACITOR		C7795	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S23A10	
1394		A2U	CAPACITOR		C7796	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1395		A2U	CAPACITOR		C7797	1-164-816-11	CERAMIC CHIP 220PF 2.00% 50V	KLV-S23A10	
1396		A2U	CAPACITOR		C7798	1-100-591-91	CERAMIC CHIP 1UF 10% 25V	KLV-S23A10	
1397		A2U	CAPACITOR		C7799	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V	KLV-S23A10	
1398		A2U	CAPACITOR		C7800	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V	KLV-S23A10	
1399		A2U	CAPACITOR		C7801	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V	KLV-S23A10	
1400		A2U	CAPACITOR		C7802	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V	KLV-S23A10	
1401		A2U	CAPACITOR		C7803	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1402		A2U	CAPACITOR		C7804	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1403		A2U	CAPACITOR		C7805	1-137-980-91	CERAMIC CHIP 0.47UF 10% 50V	KLV-S23A10	
1404		A2U	CAPACITOR		C7806	1-137-980-91	CERAMIC CHIP 0.47UF 10% 50V	KLV-S23A10	
1405		A2U	CAPACITOR		C7807	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1406		A2U	CAPACITOR		C7808	1-164-004-11	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1407		A2U	CAPACITOR		C7809	1-128-528-11	ELECT 470UF 20% 25V	KLV-S23A10	
1408		A2U	CAPACITOR		C7810	1-128-536-11	ELECT CHIP 100UF 20.00% 25V	KLV-S23A10	
1409		A2U	CAPACITOR		C8426	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1410		A2U	CAPACITOR		C8427	1-107-905-11	ELECT 4.7UF 20% 50V	KLV-S23A10	
1411		A2U	CAPACITOR		C8435	1-126-404-11	ELECT CHIP 4.7UF 20.00% 50V	KLV-S23A10	
1412		A2U	CAPACITOR		C8436	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1413		A2U	CAPACITOR		C8501	1-128-526-11	ELECT 100UF 20% 25V	KLV-S23A10	
1414		A2U	CAPACITOR		C8502	1-100-911-11	CERAMIC CHIP 4.7UF 10% 25V	KLV-S23A10	
1415		A2U	CAPACITOR		C8503	1-128-953-31	ELECT 470UF 20% 25V	KLV-S23A10	
1416		A2U	CAPACITOR		C8505	1-128-945-31	ELECT 1000UF 20% 10V	KLV-S23A10	
1417		A2U	CAPACITOR		C8507	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1418		A2U	CAPACITOR		C8551	1-128-526-11	ELECT 100UF 20% 25V	KLV-S23A10	
1419		A2U	CAPACITOR		C8552	1-128-953-31	ELECT 470UF 20% 25V	KLV-S23A10	
1420		A2U	CAPACITOR		C8555	1-100-911-11	CERAMIC CHIP 4.7UF 10% 25V	KLV-S23A10	
1421		A2U	CAPACITOR		C8558	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1422		A2U	CAPACITOR		C8561	1-128-945-31	ELECT 1000UF 20% 10V	KLV-S23A10	
1423		A2U	CAPACITOR		C8566	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1424		A2U	CAPACITOR		C8569	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1425		A2U	CAPACITOR		C8570	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1426		A2U	CAPACITOR		C8571	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
1427		A2U	CAPACITOR		C8605	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V	KLV-S23A10	
1428		A2U	CAPACITOR		C8606	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1429		A2U	CAPACITOR		C8608	1-127-760-11	CERAMIC CHIP 4.7UF 10% 6.3V	KLV-S23A10	
1430		A2U	CAPACITOR		C8609	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1431		A2U	CAPACITOR		C8655	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1432		A2U	CAPACITOR		C8656	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1433		A2U	CAPACITOR		C8658	1-135-372-31	ELECT 470UF 20% 10V	KLV-S23A10	
1434		A2U	CAPACITOR		C8659	1-128-528-11	ELECT 470UF 20% 25V	KLV-S23A10	
1435		A2U	CAPACITOR		C8660	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1436		A2U	CAPACITOR		C8662	1-128-528-11	ELECT 470UF 20% 25V	KLV-S23A10	
1437		A2U	CAPACITOR		C8663	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1438		A2U	CAPACITOR		C9001	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	KLV-S23A10	
1439		A2U	CAPACITOR		C9002	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	KLV-S23A10	
1440		A2U	CAPACITOR		C9003	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1441		A2U	CAPACITOR		C9004	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1442		A2U	CAPACITOR		C9005	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1443		A2U	CAPACITOR		C9006	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1444		A2U	CAPACITOR		C9007	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1445		A2U	CAPACITOR		C9008	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
1446		A2U	CAPACITOR		C9009	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
1447		A2U	CAPACITOR		C9010	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
1448		A2U	CAPACITOR		C9011	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1449		A2U	CAPACITOR		C9012	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1450		A2U	CAPACITOR		C9060	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
1451		A2U	CAPACITOR		C9061	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1452		A2U	CAPACITOR		C9062	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
1453		A2U	CAPACITOR		C9063	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1454		A2U	CAPACITOR		C9064	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
1455		A2U	CAPACITOR		C9065	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1456		A2U	CAPACITOR		C9066	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
1457		A2U	CAPACITOR		C9067	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1458		A2U	CAPACITOR		C9073	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
1459		A2U	CAPACITOR		C9074	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1460		A2U	CAPACITOR		C9075	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
1461		A2U	CAPACITOR		C9076	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
1462		A2U	CAPACITOR		C9306	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1463		A2U	CAPACITOR		C9307	1-127-573-11	CERAMIC CHIP 1UF 10% 16V	KLV-S23A10	
1464		A2U	CAPACITOR		C9308	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1465		A2U	CAPACITOR		C9407	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1466		A2U	CAPACITOR		C9409	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V	KLV-S23A10	
1467		A2U	CAPACITOR		C9412	1-126-396-11	ELECT CHIP 47UF 20.00% 16V	KLV-S23A10	
1468		A2U	CAPACITOR		C9413	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1469		A2U	CAPACITOR		C9414	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1470		A2U	CAPACITOR		C9415	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
1471		A2U	CONNECTOR		CN7503	1-573-290-21	PIN, CONNECTOR (1.5MM) (SMD)4P	KLV-S23A10	
1472		A2U	CONNECTOR	*	CN7750	1-764-250-11	PIN, CONNECTOR (PC BOARD) 4P	KLV-S23A10	
1473		A2U	CONNECTOR		CN8601	1-794-519-21	PIN, CONNECTOR (PC BOARD) 14P	KLV-S23A10	
1474		A2U	CONNECTOR	*	CN8602	1-573-768-21	PIN, CONNECTOR (1.5MM) (SMD)5P	KLV-S23A10	
1475		A2U	CONNECTOR		CN8603	1-573-806-21	PIN, CONNECTOR (1.5MM) (SMD)6P	KLV-S23A10	
1476		A2U	CONNECTOR		CN9300	1-794-519-21	PIN, CONNECTOR (PC BOARD) 14P	KLV-S23A10	
1477		A2U	CONNECTOR		CN9401	1-778-652-11	CONNECTOR, FFC (ZIF) 50P	KLV-S23A10	
1478		A2U	CONNECTOR		CN9405	1-816-296-21	PIN, CONNECTOR (PC BOARD) 9P	KLV-S23A10	
1479		A2U	CONNECTOR	*	CN9501	1-764-333-11	PLUG, CONNECTOR 10P	KLV-S23A10	
1480		A2U	DIODE		D7409	8-719-085-31	DIODE MM3Z2V4T1	KLV-S23A10	

No.	#	Board	Type	△/△*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1481		A2U	DIODE		D7410	8-719-085-31	DIODE MM3Z2V4T1	KLV-S23A10	
1482		A2U	DIODE		D7411	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1483		A2U	DIODE		D7412	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1484		A2U	DIODE		D7413	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1485		A2U	DIODE		D7415	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1486		A2U	DIODE		D7416	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1487		A2U	DIODE		D7603	8-719-085-31	DIODE MM3Z2V4T1	KLV-S23A10	
1488		A2U	DIODE		D7604	8-719-085-31	DIODE MM3Z2V4T1	KLV-S23A10	
1489		A2U	DIODE		D7605	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1490		A2U	DIODE		D7755	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1491		A2U	DIODE		D7756	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1492		A2U	DIODE		D7757	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1493		A2U	DIODE		D7758	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1494		A2U	DIODE		D7759	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1495		A2U	DIODE		D7767	6-500-884-01	DIODE P6SMBJ30A-5	KLV-S23A10	
1496		A2U	DIODE		D7768	6-500-884-01	DIODE P6SMBJ30A-5	KLV-S23A10	
1497		A2U	DIODE		D7769	6-500-884-01	DIODE P6SMBJ30A-5	KLV-S23A10	
1498		A2U	DIODE		D7770	6-500-884-01	DIODE P6SMBJ30A-5	KLV-S23A10	
1499		A2U	DIODE		D7775	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1500		A2U	DIODE		D7832	8-719-085-31	DIODE MM3Z2V4T1	KLV-S23A10	
1501		A2U	DIODE		D7833	8-719-085-31	DIODE MM3Z2V4T1	KLV-S23A10	
1502		A2U	DIODE		D8413	8-719-056-83	DIODE UDZ-TE-17-6.8B	KLV-S23A10	
1503		A2U	DIODE		D8414	8-719-056-82	DIODE UDZ-TE-17-6.2B	KLV-S23A10	
1504		A2U	DIODE		D8415	8-719-056-93	DIODE UDZ-TE-17-18B	KLV-S23A10	
1505		A2U	DIODE		D8416	8-719-083-52	DIODE UDZSTE-1716B	KLV-S23A10	
1506		A2U	DIODE		D8417	8-719-083-52	DIODE UDZSTE-1716B	KLV-S23A10	
1507		A2U	DIODE		D8501	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S23A10	
1508		A2U	DIODE		D8551	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S23A10	
1509		A2U	DIODE		D8553	8-719-073-34	DIODE EC21QS03L-TE12L	KLV-S23A10	
1510		A2U	DIODE		D8558	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1511		A2U	DIODE		D8565	6-500-027-01	DIODE MM3Z8V2ST1	KLV-S23A10	
1512		A2U	DIODE		D8567	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
1513		A2U	DIODE		D9009	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1514		A2U	DIODE		D9010	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1515		A2U	DIODE		D9011	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1516		A2U	DIODE		D9012	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1517		A2U	DIODE		D9013	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1518		A2U	DIODE		D9014	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1519		A2U	DIODE		D9015	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1520		A2U	DIODE		D9016	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1521		A2U	DIODE		D9050	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1522		A2U	DIODE		D9051	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1523		A2U	DIODE		D9052	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1524		A2U	DIODE		D9053	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1525		A2U	DIODE		D9056	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1526		A2U	DIODE		D9057	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1527		A2U	DIODE		D9302	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1528		A2U	DIODE		D9303	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
1529		A2U	FERRITE BEAD		FB7750	1-469-185-11	FERRITE 0UH	KLV-S23A10	
1530		A2U	FERRITE BEAD		FB7751	1-469-185-11	FERRITE 0UH	KLV-S23A10	
1531		A2U	FERRITE BEAD		FB7752	1-469-185-11	FERRITE 0UH	KLV-S23A10	
1532		A2U	FERRITE BEAD		FB7753	1-469-185-11	FERRITE 0UH	KLV-S23A10	
1533		A2U	FERRITE BEAD		FB7754	1-469-185-11	FERRITE 0UH	KLV-S23A10	
1534		A2U	FERRITE BEAD		FB7755	1-469-185-11	FERRITE 0UH	KLV-S23A10	
1535		A2U	FERRITE BEAD		FB7756	1-469-185-11	FERRITE 0UH	KLV-S23A10	
1536		A2U	FERRITE BEAD		FB7757	1-469-185-11	FERRITE 0UH	KLV-S23A10	
1537		A2U	FERRITE BEAD		FB8501	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1538		A2U	FERRITE BEAD		FB8552	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1539		A2U	FERRITE BEAD		FB8601	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1540		A2U	FERRITE BEAD		FB8602	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1541		A2U	FERRITE BEAD		FB8603	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1542		A2U	FERRITE BEAD		FB8605	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1543		A2U	FERRITE BEAD		FB8606	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1544		A2U	FERRITE BEAD		FB8607	1-414-445-11	FERRITE 0UH	KLV-S23A10	
1545		A2U	FERRITE BEAD		FB8608	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1546		A2U	FERRITE BEAD		FB8609	1-414-445-11	FERRITE 0UH	KLV-S23A10	
1547		A2U	FERRITE BEAD		FB8610	1-414-445-11	FERRITE 0UH	KLV-S23A10	
1548		A2U	FERRITE BEAD		FB8611	1-414-445-11	FERRITE 0UH	KLV-S23A10	
1549		A2U	FERRITE BEAD		FB8620	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1550		A2U	FERRITE BEAD		FB8622	1-414-445-11	FERRITE 0UH	KLV-S23A10	
1551		A2U	FERRITE BEAD		FB8651	1-469-775-21	FERRITE 0UH	KLV-S23A10	
1552		A2U	IC		IC2505	8-753-232-63	IC CXA2229Q-T6	KLV-S23A10	
1553		A2U	IC		IC7001	8-759-460-79	IC BA09FP-E2	KLV-S23A10	
1554		A2U	IC		IC7103	8-752-107-98	IC CXA2188Q-T4	KLV-S23A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1555		A2U	IC		IC7301	6-707-724-01	IC NJW1149AFH1	KLV-S23A10	
1556		A2U	IC		IC7404	6-705-679-01	IC RC4558PWR	KLV-S23A10	
1557		A2U	IC		IC7405	6-703-042-01	IC CD4052BNSR	KLV-S23A10	
1558		A2U	IC		IC7601	8-759-359-49	IC NJM3414AV(TE2)	KLV-S23A10	
1559		A2U	IC		IC7702	6-705-679-01	IC RC4558PWR	KLV-S23A10	
1560		A2U	IC		IC7703	8-759-836-72	IC NJM2521V(TE2)	KLV-S23A10	
1561		A2U	IC		IC7704	8-759-836-72	IC NJM2521V(TE2)	KLV-S23A10	
1562		A2U	IC		IC7750	6-705-679-01	IC RC4558PWR	KLV-S23A10	
1563		A2U	IC		IC7802	6-707-708-01	IC TPA3004D2PHPR	KLV-S23A10	
1564		A2U	IC		IC8501	6-704-407-01	IC PQ1CZ41H2ZPH	KLV-S23A10	
1565		A2U	IC		IC8552	6-702-142-01	IC PQ1CY1032ZP	KLV-S23A10	
1566		A2U	IC		IC8652	8-759-592-79	IC BA00AST-V5	KLV-S23A10	
1567		A2U	IC		IC8653	8-759-592-79	IC BA00AST-V5	KLV-S23A10	
1568		A2U	JACK		J9001	1-815-015-11	JACK BLOCK, PIN	KLV-S23A10	
1569		A2U	JACK		J9002	1-780-243-11	TERMINAL BLOCK, S 6P	KLV-S23A10	
1570		A2U	JACK		J9004	1-793-725-11	JACK BLOCK, PIN 2P	KLV-S23A10	
1571		A2U	JACK		J9011	1-507-792-00	JACK	KLV-S23A10	
1572		A2U	COIL		L2501	1-412-058-11	INDUCTOR 10UH	KLV-S23A10	
1573		A2U	COIL		L2502	1-412-058-11	INDUCTOR 10UH	KLV-S23A10	
1574		A2U	COIL		L2503	1-412-058-11	INDUCTOR 10UH	KLV-S23A10	
1575		A2U	COIL		L2504	1-412-058-11	INDUCTOR 10UH	KLV-S23A10	
1576		A2U	COIL		L2505	1-412-058-11	INDUCTOR 10UH	KLV-S23A10	
1577		A2U	COIL		L2801	1-412-030-11	INDUCTOR 22UH	KLV-S23A10	
1578		A2U	COIL		L2802	1-412-030-11	INDUCTOR 22UH	KLV-S23A10	
1579		A2U	COIL		L2803	1-412-030-11	INDUCTOR 22UH	KLV-S23A10	
1580		A2U	COIL		L2804	1-412-030-11	INDUCTOR 22UH	KLV-S23A10	
1581		A2U	COIL		L7001	1-412-549-31	INDUCTOR 1MH	KLV-S23A10	
1582		A2U	COIL		L7401	1-412-058-11	INDUCTOR 10UH	KLV-S23A10	
1583		A2U	COIL		L7750	1-400-472-11	INDUCTOR 33UH	KLV-S23A10	
1584		A2U	COIL		L7751	1-400-472-11	INDUCTOR 33UH	KLV-S23A10	
1585		A2U	COIL		L7752	1-400-472-11	INDUCTOR 33UH	KLV-S23A10	
1586		A2U	COIL		L7753	1-400-472-11	INDUCTOR 33UH	KLV-S23A10	
1587		A2U	COIL		L7801	1-406-663-21	INDUCTOR 47UH	KLV-S23A10	
1588		A2U	COIL		L8501	1-412-525-31	INDUCTOR 10UH	KLV-S23A10	
1589		A2U	COIL		L8502	1-456-786-21	INDUCTOR 47UH	KLV-S23A10	
1590		A2U	COIL		L8551	1-412-525-31	INDUCTOR 10UH	KLV-S23A10	
1591		A2U	COIL		L8553	1-424-976-21	INDUCTOR 47UH	KLV-S23A10	
1592		A2U	COIL		L9400	1-424-922-21	INDUCTOR 10UH	KLV-S23A10	
1593		A2U	IC LINK	△	PS7754	1-576-873-11	IC LINK 3.15A 35V	KLV-S23A10	
1594		A2U	IC LINK	△	PS8401	1-576-646-11	FUSE 0.5A 50V	KLV-S23A10	
1595		A2U	IC LINK	△	PS8501	1-533-593-42	IC LINK 2A 90V	KLV-S23A10	
1596		A2U	IC LINK	△	PS8551	1-533-595-42	IC LINK 3.15A 90V	KLV-S23A10	
1597		A2U	TRANSISTOR		Q2503	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S23A10	
1598		A2U	TRANSISTOR		Q2504	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S23A10	
1599		A2U	TRANSISTOR		Q2507	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1600		A2U	TRANSISTOR		Q2508	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1601		A2U	TRANSISTOR		Q2509	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1602		A2U	TRANSISTOR		Q2512	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1603		A2U	TRANSISTOR		Q2513	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1604		A2U	TRANSISTOR		Q2514	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1605		A2U	TRANSISTOR		Q2801	6-550-585-01	TRANSISTOR 2PC4081R-115	KLV-S23A10	
1606		A2U	TRANSISTOR		Q2802	6-550-586-01	TRANSISTOR 2PA1576R-115	KLV-S23A10	
1607		A2U	TRANSISTOR		Q7001	8-729-029-00	TRANSISTOR DTC115EUA-T106	KLV-S23A10	
1608		A2U	TRANSISTOR		Q7406	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S23A10	
1609		A2U	TRANSISTOR		Q7407	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S23A10	
1610		A2U	TRANSISTOR		Q7411	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S23A10	
1611		A2U	TRANSISTOR		Q7413	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S23A10	
1612		A2U	TRANSISTOR		Q7601	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S23A10	
1613		A2U	TRANSISTOR		Q7602	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S23A10	
1614		A2U	TRANSISTOR		Q7605	8-729-015-39	TRANSISTOR DTC323TK	KLV-S23A10	
1615		A2U	TRANSISTOR		Q7606	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S23A10	
1616		A2U	TRANSISTOR		Q7740	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1617		A2U	TRANSISTOR		Q7741	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1618		A2U	TRANSISTOR		Q7742	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1619		A2U	TRANSISTOR		Q7743	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1620		A2U	TRANSISTOR		Q7744	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S23A10	
1621		A2U	TRANSISTOR		Q7752	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S23A10	
1622		A2U	TRANSISTOR		Q7753	8-729-920-21	TRANSISTOR DTC314TK-T-146	KLV-S23A10	
1623		A2U	TRANSISTOR		Q7754	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S23A10	
1624		A2U	TRANSISTOR		Q7755	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S23A10	
1625		A2U	TRANSISTOR		Q7757	6-550-076-01	TRANSISTOR MUN5213T1	KLV-S23A10	
1626		A2U	TRANSISTOR		Q7758	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1627		A2U	TRANSISTOR		Q8403	8-729-026-53	TRANSISTOR 2SA1576A-T106-QR	KLV-S23A10	
1628		A2U	TRANSISTOR		Q8404	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S23A10	

No.	#	Board	Type	$\Delta$ / <sup>*</sup>	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1629		A2U	TRANSISTOR		Q8405	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S23A10	
1630		A2U	TRANSISTOR		Q8552	8-729-907-00	TRANSISTOR DTC114EU	KLV-S23A10	
1631		A2U	TRANSISTOR		Q8560	8-729-907-00	TRANSISTOR DTC114EU	KLV-S23A10	
1632		A2U	TRANSISTOR		Q8561	8-729-907-00	TRANSISTOR DTC114EU	KLV-S23A10	
1633		A2U	TRANSISTOR		Q8562	8-729-907-00	TRANSISTOR DTC114EU	KLV-S23A10	
1634		A2U	TRANSISTOR		Q8563	8-729-422-33	TRANSISTOR 2SD601A-Q-TX	KLV-S23A10	
1635		A2U	TRANSISTOR		Q8601	8-729-029-00	TRANSISTOR DTC115EUA-T106	KLV-S23A10	
1636		A2U	TRANSISTOR		Q8615	8-729-905-35	TRANSISTOR 2SC4081-R	KLV-S23A10	
1637		A2U	TRANSISTOR		Q8616	8-729-907-00	TRANSISTOR DTC114EU	KLV-S23A10	
1638		A2U	RESISTOR		R2501	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1639		A2U	RESISTOR		R2502	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1640		A2U	RESISTOR		R2506	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1641		A2U	RESISTOR		R2507	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1642		A2U	RESISTOR		R2508	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
1643		A2U	RESISTOR		R2510	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
1644		A2U	RESISTOR		R2514	1-216-806-11	METAL CHIP 56 5% 1/10W	KLV-S23A10	
1645		A2U	RESISTOR		R2515	1-216-806-11	METAL CHIP 56 5% 1/10W	KLV-S23A10	
1646		A2U	RESISTOR		R2516	1-216-806-11	METAL CHIP 56 5% 1/10W	KLV-S23A10	
1647		A2U	RESISTOR		R2532	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S23A10	
1648		A2U	RESISTOR		R2533	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1649		A2U	RESISTOR		R2534	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S23A10	
1650		A2U	RESISTOR		R2536	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1651		A2U	RESISTOR		R2537	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S23A10	
1652		A2U	RESISTOR		R2540	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1653		A2U	RESISTOR		R2546	1-216-843-11	METAL CHIP 68K 5% 1/10W	KLV-S23A10	
1654		A2U	RESISTOR		R2550	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
1655		A2U	RESISTOR		R2552	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1656		A2U	RESISTOR		R2554	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S23A10	
1657		A2U	RESISTOR		R2555	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S23A10	
1658		A2U	RESISTOR		R2556	1-216-820-11	METAL CHIP 820 5% 1/10W	KLV-S23A10	
1659		A2U	RESISTOR		R2559	1-216-843-11	METAL CHIP 68K 5% 1/10W	KLV-S23A10	
1660		A2U	RESISTOR		R2560	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S23A10	
1661		A2U	RESISTOR		R2562	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1662		A2U	RESISTOR		R2564	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1663		A2U	RESISTOR		R2565	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1664		A2U	RESISTOR		R2567	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1665		A2U	RESISTOR		R2569	1-216-861-11	METAL CHIP 2.2M 5% 1/10W	KLV-S23A10	
1666		A2U	RESISTOR		R2573	1-216-861-11	METAL CHIP 2.2M 5% 1/10W	KLV-S23A10	
1667		A2U	RESISTOR		R2577	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1668		A2U	RESISTOR		R2578	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1669		A2U	RESISTOR		R2579	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1670		A2U	RESISTOR		R2580	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S23A10	
1671		A2U	RESISTOR		R2581	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1672		A2U	RESISTOR		R2582	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S23A10	
1673		A2U	RESISTOR		R2583	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1674		A2U	RESISTOR		R2596	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1675		A2U	RESISTOR		R2597	1-216-815-11	METAL CHIP 330 5% 1/10W	KLV-S23A10	
1676		A2U	RESISTOR		R2801	1-218-849-11	METAL CHIP 1.2K 0.5% 1/10W	KLV-S23A10	
1677		A2U	RESISTOR		R2802	1-218-851-11	METAL CHIP 1.5K 0.5% 1/10W	KLV-S23A10	
1678		A2U	RESISTOR		R2803	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1679		A2U	RESISTOR		R2804	1-216-813-11	METAL CHIP 220 5% 1/10W	KLV-S23A10	
1680		A2U	RESISTOR		R2805	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1681		A2U	RESISTOR		R2806	1-218-689-11	METAL CHIP 750 0.5% 1/10W	KLV-S23A10	
1682		A2U	RESISTOR		R2807	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1683		A2U	RESISTOR		R7002	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
1684		A2U	RESISTOR		R7003	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
1685		A2U	RESISTOR		R7004	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1686		A2U	RESISTOR		R7005	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1687		A2U	RESISTOR		R7006	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1688		A2U	RESISTOR		R7007	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1689		A2U	RESISTOR		R7008	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1690		A2U	RESISTOR		R7028	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1691		A2U	RESISTOR		R7101	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1692		A2U	RESISTOR		R7102	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1693		A2U	RESISTOR		R7103	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1694		A2U	RESISTOR		R7104	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1695		A2U	RESISTOR		R7105	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1696		A2U	RESISTOR		R7106	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1697		A2U	RESISTOR		R7107	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1698		A2U	RESISTOR		R7108	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1699		A2U	RESISTOR		R7113	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S23A10	
1700		A2U	RESISTOR		R7114	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S23A10	
1701		A2U	RESISTOR		R7117	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1702		A2U	RESISTOR		R7118	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1703		A2U	RESISTOR		R7122	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1704		A2U	RESISTOR		R7123	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1705		A2U	RESISTOR		R7124	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1706		A2U	RESISTOR		R7125	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1707		A2U	RESISTOR		R7126	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1708		A2U	RESISTOR		R7127	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1709		A2U	RESISTOR		R7313	1-218-856-11	METAL CHIP 2.4K 0.5% 1/10W	KLV-S23A10	
1710		A2U	RESISTOR		R7314	1-218-856-11	METAL CHIP 2.4K 0.5% 1/10W	KLV-S23A10	
1711		A2U	RESISTOR		R7315	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
1712		A2U	RESISTOR		R7316	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
1713		A2U	RESISTOR		R7317	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1714		A2U	RESISTOR		R7318	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1715		A2U	RESISTOR		R7320	1-218-292-11	METAL CHIP 20K 5% 1/10W	KLV-S23A10	
1716		A2U	RESISTOR		R7321	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S23A10	
1717		A2U	RESISTOR		R7322	1-216-805-11	METAL CHIP 47 5% 1/10W	KLV-S23A10	
1718		A2U	RESISTOR		R7323	1-218-292-11	METAL CHIP 20K 5% 1/10W	KLV-S23A10	
1719		A2U	RESISTOR		R7324	1-218-292-11	METAL CHIP 20K 5% 1/10W	KLV-S23A10	
1720		A2U	RESISTOR		R7325	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1721		A2U	RESISTOR		R7401	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1722		A2U	RESISTOR		R7402	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
1723		A2U	RESISTOR		R7409	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1724		A2U	RESISTOR		R7412	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1725		A2U	RESISTOR		R7423	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S23A10	
1726		A2U	RESISTOR		R7424	1-218-889-11	METAL CHIP 56K 0.5% 1/10W	KLV-S23A10	
1727		A2U	RESISTOR		R7425	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S23A10	
1728		A2U	RESISTOR		R7431	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1729		A2U	RESISTOR		R7432	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1730		A2U	RESISTOR		R7437	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S23A10	
1731		A2U	RESISTOR		R7438	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S23A10	
1732		A2U	RESISTOR		R7439	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S23A10	
1733		A2U	RESISTOR		R7440	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S23A10	
1734		A2U	RESISTOR		R7443	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1735		A2U	RESISTOR		R7445	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1736		A2U	RESISTOR		R7447	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1737		A2U	RESISTOR		R7451	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1738		A2U	RESISTOR		R7452	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1739		A2U	RESISTOR		R7453	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1740		A2U	RESISTOR		R7454	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1741		A2U	RESISTOR		R7455	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S23A10	
1742		A2U	RESISTOR		R7456	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S23A10	
1743		A2U	RESISTOR		R7459	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
1744		A2U	RESISTOR		R7460	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
1745		A2U	RESISTOR		R7601	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1746		A2U	RESISTOR		R7603	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
1747		A2U	RESISTOR		R7604	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
1748		A2U	RESISTOR		R7606	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1749		A2U	RESISTOR		R7607	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1750		A2U	RESISTOR		R7608	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1751		A2U	RESISTOR		R7609	1-218-873-11	METAL CHIP 12K 0.5% 1/10W	KLV-S23A10	
1752		A2U	RESISTOR		R7610	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1753		A2U	RESISTOR		R7611	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1754		A2U	RESISTOR		R7612	1-216-839-11	METAL CHIP 33K 5% 1/10W	KLV-S23A10	
1755		A2U	RESISTOR		R7613	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	KLV-S23A10	
1756		A2U	RESISTOR		R7614	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	KLV-S23A10	
1757		A2U	RESISTOR		R7615	1-216-839-11	METAL CHIP 33K 5% 1/10W	KLV-S23A10	
1758		A2U	RESISTOR		R7616	1-216-813-11	METAL CHIP 220 5% 1/10W	KLV-S23A10	
1759		A2U	RESISTOR		R7617	1-216-813-11	METAL CHIP 220 5% 1/10W	KLV-S23A10	
1760		A2U	RESISTOR		R7619	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1761		A2U	RESISTOR		R7620	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1762		A2U	RESISTOR		R7621	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1763		A2U	RESISTOR		R7622	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1764		A2U	RESISTOR		R7623	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1765		A2U	RESISTOR		R7624	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1766		A2U	RESISTOR		R7625	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1767		A2U	RESISTOR		R7626	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1768		A2U	RESISTOR		R7726	1-218-873-11	METAL CHIP 12K 0.5% 1/10W	KLV-S23A10	
1769		A2U	RESISTOR		R7727	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1770		A2U	RESISTOR		R7728	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S23A10	
1771		A2U	RESISTOR		R7729	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S23A10	
1772		A2U	RESISTOR		R7730	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1773		A2U	RESISTOR		R7731	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1774		A2U	RESISTOR		R7732	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S23A10	
1775		A2U	RESISTOR		R7733	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S23A10	
1776		A2U	RESISTOR		R7734	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W	KLV-S23A10	

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1777		A2U	RESISTOR		R7735	1-218-859-11	METAL CHIP 3.3K 0.5% 1/10W	KLV-S23A10	
1778		A2U	RESISTOR		R7736	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
1779		A2U	RESISTOR		R7741	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1780		A2U	RESISTOR		R7742	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
1781		A2U	RESISTOR		R7743	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1782		A2U	RESISTOR		R7744	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1783		A2U	RESISTOR		R7759	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S23A10	
1784		A2U	RESISTOR		R7760	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S23A10	
1785		A2U	RESISTOR		R7761	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1786		A2U	RESISTOR		R7762	1-218-873-11	METAL CHIP 12K 0.5% 1/10W	KLV-S23A10	
1787		A2U	RESISTOR		R7763	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1788		A2U	RESISTOR		R7764	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S23A10	
1789		A2U	RESISTOR		R7765	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1790		A2U	RESISTOR		R7766	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1791		A2U	RESISTOR		R7767	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1792		A2U	RESISTOR		R7768	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1793		A2U	RESISTOR		R7769	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1794		A2U	RESISTOR		R7770	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1795		A2U	RESISTOR		R7771	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1796		A2U	RESISTOR		R7772	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S23A10	
1797		A2U	RESISTOR		R7773	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S23A10	
1798		A2U	RESISTOR		R7774	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S23A10	
1799		A2U	RESISTOR		R7775	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S23A10	
1800		A2U	RESISTOR		R7776	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S23A10	
1801		A2U	RESISTOR		R7777	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1802		A2U	RESISTOR		R7778	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1803		A2U	RESISTOR		R7779	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1804		A2U	RESISTOR		R7780	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1805		A2U	RESISTOR		R7781	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1806		A2U	RESISTOR		R7782	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1807		A2U	RESISTOR		R7783	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1808		A2U	RESISTOR		R7787	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1809		A2U	RESISTOR		R7789	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1810		A2U	RESISTOR		R7790	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S23A10	
1811		A2U	RESISTOR		R7791	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1812		A2U	RESISTOR		R7792	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1813		A2U	RESISTOR		R7793	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1814		A2U	RESISTOR		R7794	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1815		A2U	RESISTOR		R7795	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1816		A2U	RESISTOR		R7799	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1817		A2U	RESISTOR		R7800	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1818		A2U	RESISTOR		R7801	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1819		A2U	RESISTOR		R7802	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1820		A2U	RESISTOR		R7803	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1821		A2U	RESISTOR		R7804	1-218-897-11	METAL CHIP 120K 0.5% 1/10W	KLV-S23A10-	
1822		A2U	RESISTOR		R7805	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1823		A2U	RESISTOR		R7806	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1824		A2U	RESISTOR		R7807	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1825		A2U	RESISTOR		R7808	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1826		A2U	RESISTOR		R7809	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1827		A2U	RESISTOR		R7810	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1828		A2U	RESISTOR		R7811	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1829		A2U	RESISTOR		R7812	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1830		A2U	RESISTOR		R7813	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1831		A2U	RESISTOR		R7814	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1832		A2U	RESISTOR		R7831	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1833		A2U	RESISTOR		R8433	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1834		A2U	RESISTOR		R8434	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1835		A2U	RESISTOR		R8436	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1836		A2U	RESISTOR		R8441	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1837		A2U	RESISTOR		R8442	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1838		A2U	RESISTOR		R8443	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S23A10	
1839		A2U	RESISTOR		R8444	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1840		A2U	RESISTOR		R8501	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1841		A2U	RESISTOR		R8503	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1842		A2U	RESISTOR		R8504	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S23A10	
1843		A2U	RESISTOR		R8505	1-218-849-11	METAL CHIP 1.2K 0.5% 1/10W	KLV-S23A10	
1844		A2U	RESISTOR		R8550	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1845		A2U	RESISTOR		R8553	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1846		A2U	RESISTOR		R8560	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S23A10	
1847		A2U	RESISTOR		R8561	1-218-857-11	METAL CHIP 2.7K 0.5% 1/10W	KLV-S23A10	
1848		A2U	RESISTOR		R8565	1-218-889-11	METAL CHIP 56K 0.5% 1/10W	KLV-S23A10	
1849		A2U	RESISTOR		R8569	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1850		A2U	RESISTOR		R8572	1-216-864-11	SHORT CHIP 0	KLV-S23A10	

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1851		A2U	RESISTOR		R8582	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1852		A2U	RESISTOR		R8586	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1853		A2U	RESISTOR		R8587	1-216-843-11	METAL CHIP 68K 5% 1/10W	KLV-S23A10	
1854		A2U	RESISTOR		R8588	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1855		A2U	RESISTOR		R8589	1-216-847-11	METAL CHIP 150K 5% 1/10W	KLV-S23A10	
1856		A2U	RESISTOR		R8590	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
1857		A2U	RESISTOR		R8591	1-216-847-11	METAL CHIP 150K 5% 1/10W	KLV-S23A10	
1858		A2U	RESISTOR		R8592	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1859		A2U	RESISTOR		R8594	1-218-861-11	METAL CHIP 3.9K 0.5% 1/10W	KLV-S23A10	
1860		A2U	RESISTOR		R8605	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S23A10	
1861		A2U	RESISTOR		R8606	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1862		A2U	RESISTOR		R8610	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1863		A2U	RESISTOR		R8613	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1864		A2U	RESISTOR		R8614	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
1865		A2U	RESISTOR		R8615	1-218-712-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1866		A2U	RESISTOR		R8616	1-218-712-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1867		A2U	RESISTOR		R8617	1-218-688-11	METAL CHIP 680 0.5% 1/10W	KLV-S23A10	
1868		A2U	RESISTOR		R8618	1-218-688-11	METAL CHIP 680 0.5% 1/10W	KLV-S23A10	
1869		A2U	RESISTOR		R8619	1-216-843-11	METAL CHIP 68K 5% 1/10W	KLV-S23A10	
1870		A2U	RESISTOR		R8620	1-216-851-11	METAL CHIP 330K 5% 1/10W	KLV-S23A10	
1871		A2U	RESISTOR		R8622	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1872		A2U	RESISTOR		R8623	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1873		A2U	RESISTOR		R8624	1-216-835-11	METAL CHIP 15K 5% 1/10W	KLV-S23A10	
1874		A2U	RESISTOR		R8625	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1875		A2U	RESISTOR		R8650	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1876		A2U	RESISTOR		R8651	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
1877		A2U	RESISTOR		R8656	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1878		A2U	RESISTOR		R8657	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S23A10	
1879		A2U	RESISTOR		R8658	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
1880		A2U	RESISTOR		R8659	1-218-881-11	METAL CHIP 27K 0.5% 1/10W	KLV-S23A10	
1881		A2U	RESISTOR		R8660	1-216-841-11	METAL CHIP 47K 5% 1/10W	KLV-S23A10	
1882		A2U	RESISTOR		R8661	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W	KLV-S23A10	
1883		A2U	RESISTOR		R8662	1-218-877-11	METAL CHIP 18K 0.5% 1/10W	KLV-S23A10	
1884		A2U	RESISTOR		R8663	1-218-891-11	METAL CHIP 68K 0.5% 1/10W	KLV-S23A10	
1885		A2U	RESISTOR		R8830	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
1886		A2U	RESISTOR		R9002	1-216-849-11	METAL CHIP 220K 5% 1/10W	KLV-S23A10	
1887		A2U	RESISTOR		R9003	1-216-849-11	METAL CHIP 220K 5% 1/10W	KLV-S23A10	
1888		A2U	RESISTOR		R9004	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1889		A2U	RESISTOR		R9005	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1890		A2U	RESISTOR		R9006	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1891		A2U	RESISTOR		R9007	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1892		A2U	RESISTOR		R9009	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1893		A2U	RESISTOR		R9010	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S23A10	
1894		A2U	RESISTOR		R9011	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1895		A2U	RESISTOR		R9012	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1896		A2U	RESISTOR		R9013	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S23A10	
1897		A2U	RESISTOR		R9014	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1898		A2U	RESISTOR		R9015	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1899		A2U	RESISTOR		R9016	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1900		A2U	RESISTOR		R9017	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1901		A2U	RESISTOR		R9018	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1902		A2U	RESISTOR		R9019	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1903		A2U	RESISTOR		R9021	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1904		A2U	RESISTOR		R9023	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1905		A2U	RESISTOR		R9024	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1906		A2U	RESISTOR		R9026	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1907		A2U	RESISTOR		R9030	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
1908		A2U	RESISTOR		R9047	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1909		A2U	RESISTOR		R9048	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1910		A2U	RESISTOR		R9049	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1911		A2U	RESISTOR		R9050	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1912		A2U	RESISTOR		R9051	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1913		A2U	RESISTOR		R9052	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1914		A2U	RESISTOR		R9053	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1915		A2U	RESISTOR		R9054	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1916		A2U	RESISTOR		R9055	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1917		A2U	RESISTOR		R9056	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
1918		A2U	RESISTOR		R9120	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1919		A2U	RESISTOR		R9121	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1920		A2U	RESISTOR		R9122	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1921		A2U	RESISTOR		R9123	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1922		A2U	RESISTOR		R9124	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1923		A2U	RESISTOR		R9125	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1924		A2U	RESISTOR		R9126	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	



No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1925		A2U	RESISTOR		R9127	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1926		A2U	RESISTOR		R9132	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1927		A2U	RESISTOR		R9133	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1928		A2U	RESISTOR		R9134	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1929		A2U	RESISTOR		R9135	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
1930		A2U	RESISTOR		R9308	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S23A10	
1931		A2U	RESISTOR		R9309	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S23A10	
1932		A2U	RESISTOR		R9310	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S23A10	
1933		A2U	RESISTOR		R9327	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1934		A2U	RESISTOR		R9329	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
1935		A2U	RESISTOR		R9401	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1936		A2U	RESISTOR		R9402	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1937		A2U	RESISTOR		R9404	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1938		A2U	RESISTOR		R9406	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1939		A2U	RESISTOR		R9407	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1940		A2U	RESISTOR		R9408	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1941		A2U	RESISTOR		R9409	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1942		A2U	RESISTOR		R9411	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
1943		A2U	RESISTOR		R9474	1-218-889-11	METAL CHIP 56K 0.5% 1/10W	KLV-S23A10	
1944		A2U	VARISTOR		VD7601	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1945		A2U	VARISTOR		VD7750	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1946		A2U	VARISTOR		VD7751	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1947		A2U	VARISTOR		VD7752	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1948		A2U	VARISTOR		VD7753	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1949		A2U	VARISTOR		VD9001	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1950		A2U	VARISTOR		VD9002	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1951		A2U	VARISTOR		VD9003	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1952		A2U	VARISTOR		VD9004	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1953		A2U	VARISTOR		VD9005	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1954		A2U	VARISTOR		VD9006	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1955		A2U	VARISTOR		VD9007	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1956		A2U	VARISTOR		VD9009	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1957		A2U	VARISTOR		VD9011	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1958		A2U	VARISTOR		VD9013	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1959		A2U	VARISTOR		VD9015	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1960		A2U	VARISTOR		VD9017	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1961		A2U	VARISTOR		VD9050	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1962		A2U	VARISTOR		VD9051	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1963		A2U	VARISTOR		VD9052	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1964		A2U	VARISTOR		VD9053	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1965		A2U	VARISTOR		VD9056	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1966		A2U	VARISTOR		VD9057	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1967		A2U	VARISTOR		VD9060	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1968		A2U	VARISTOR		VD9061	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
1969		A2U	CRYSTAL		X2501	1-781-922-21	VIBRATOR, CERAMIC	KLV-S23A10	
1970		G1	CAPACITOR		C6000	1-161-964-91	CERAMIC 0.0047UF 250V	KLV-S23A10	
1971		G1	CAPACITOR	$\Delta$	C6001	1-119-892-51	CERAMIC 470PF 10.00% 250V	KLV-S23A10	
1972		G1	CAPACITOR	$\Delta$	C6002	1-165-529-31	MYLAR 0.22UF 10 0V	KLV-S23A10	
1973		G1	CAPACITOR		C6003	1-161-964-91	CERAMIC 0.0047UF 250V	KLV-S23A10	
1974		G1	CAPACITOR	$\Delta$	C6004	1-165-529-31	MYLAR 0.22UF 10 0V	KLV-S23A10	
1975		G1	CAPACITOR	$\Delta$	C6005	1-119-892-51	CERAMIC 470PF 10.00% 250V	KLV-S23A10	
1976		G1	CAPACITOR		C6008	1-135-361-11	ELECT 180UF 20% 450V	KLV-S23A10	
1977		G1	CAPACITOR		C6012	1-113-889-11	CERAMIC 0.001UF 20.00% 250V	KLV-S23A10	
1978		G1	CAPACITOR		C6013	1-113-889-11	CERAMIC 0.001UF 20.00% 250V	KLV-S23A10	
1979		G1	CAPACITOR		C6100	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1980		G1	CAPACITOR		C6101	1-107-905-11	ELECT 4.7UF 20% 50V	KLV-S23A10	
1981		G1	CAPACITOR		C6102	1-107-910-11	ELECT 100UF 20% 50V	KLV-S23A10	
1982		G1	CAPACITOR		C6103	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
1983		G1	CAPACITOR		C6104	1-100-831-91	CERAMIC CHIP 0.001UF 2% 50V	KLV-S23A10	
1984		G1	CAPACITOR		C6105	1-107-906-11	ELECT 10UF 20% 50V	KLV-S23A10	
1985		G1	CAPACITOR		C6108	1-115-340-11	CERAMIC CHIP 0.22UF 10.00% 25V	KLV-S23A10	
1986		G1	CAPACITOR		C6109	1-107-888-11	ELECT 47UF 20% 25V	KLV-S23A10	
1987		G1	CAPACITOR		C6111	1-100-613-81	CERAMIC 470PF 5% 1KV	KLV-S23A10	
1988		G1	CAPACITOR		C6112	1-165-608-11	FILM 15000PF 3% 800V	KLV-S23A10	
1989		G1	CAPACITOR		C6116	1-163-021-91	CERAMIC CHIP 0.01UF 10.00% 50V	KLV-S23A10	
1990		G1	CAPACITOR		C6200	1-164-245-11	CERAMIC CHIP 0.015UF 10.00% 25V	KLV-S23A10	
1991		G1	CAPACITOR		C6202	1-128-954-11	ELECT 1000UF 20% 25V	KLV-S23A10	
1992		G1	CAPACITOR		C6203	1-107-907-11	ELECT 22UF 20% 50V	KLV-S23A10	
1993		G1	CAPACITOR		C6204	1-128-954-11	ELECT 1000UF 20% 25V	KLV-S23A10	
1994		G1	CAPACITOR		C6205	1-128-954-11	ELECT 1000UF 20% 25V	KLV-S23A10	
1995		G1	CAPACITOR		C6216	1-107-928-11	ELECT 4.7UF 20% 100V	KLV-S23A10	
1996		G1	CAPACITOR		C6217	1-128-950-31	ELECT 1000UF 20% 16V	KLV-S23A10	
1997		G1	CAPACITOR		C6300	1-161-964-91	CERAMIC 0.0047UF 250V	KLV-S23A10	
1998		G1	CAPACITOR		C6301	1-161-964-91	CERAMIC 0.0047UF 250V	KLV-S23A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1999		G1	CAPACITOR		C6304	1-100-780-31	ELECT 22UF 20% 450V	KLV-S23A10	
2000		G1	CAPACITOR		C6305	1-107-974-11	CERAMIC 47PF 5.00% 2KV	KLV-S23A10	
2001		G1	CAPACITOR		C6306	1-107-903-11	ELECT 2.2UF 20% 50V	KLV-S23A10	
2002		G1	CAPACITOR		C6307	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
2003		G1	CAPACITOR		C6308	1-165-127-11	CERAMIC 470PF 10.00% 500V	KLV-S23A10	
2004		G1	CAPACITOR		C6309	1-107-905-11	ELECT 4.7UF 20% 50V	KLV-S23A10	
2005		G1	CAPACITOR		C6310	1-107-910-11	ELECT 100UF 20% 50V	KLV-S23A10	
2006		G1	CAPACITOR		C6314	1-165-729-31	ELECT 470UF 20% 16V	KLV-S23A10	
2007		G1	CAPACITOR		C6315	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
2008		G1	CAPACITOR		C6400	1-107-902-11	ELECT 1UF 20% 50V	KLV-S23A10	
2009		G1	CAPACITOR		C6401	1-107-882-91	ELECT 100UF 20% 16V	KLV-S23A10	
2010		G1	CAPACITOR		C6403	1-107-902-11	ELECT 1UF 20% 50V	KLV-S23A10	
2011		G1	CAPACITOR		C6404	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	KLV-S23A10	
2012		G1	CAPACITOR		C6405	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
2013		G1	CAPACITOR		C6412	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
2014		G1	CAPACITOR		C6504	1-131-872-91	CERAMIC CHIP 1000PF 10% 630V	KLV-S23A10	
2015		G1	CAPACITOR		C6505	1-131-872-91	CERAMIC CHIP 1000PF 10% 630V	KLV-S23A10	
2016		G1	CAPACITOR		C6518	1-117-227-11	MYLAR 1UF 10.00% 450V	KLV-S23A10	
2017		G1	CAPACITOR		C6519	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
2018		G1	CAPACITOR		C6520	1-117-228-11	MYLAR 2.2UF 10.00% 450V	KLV-S23A10	
2019		G1	CAPACITOR		C6521	1-107-823-11	CERAMIC CHIP 0.47UF 10.00% 16V	KLV-S23A10	
2020		G1	CAPACITOR		C6522	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
2021		G1	CAPACITOR		C6523	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
2022		G1	CAPACITOR		C6524	1-162-923-11	CERAMIC CHIP 47PF 5.00% 50V	KLV-S23A10	
2023		G1	CAPACITOR		C6525	1-115-339-11	CERAMIC CHIP 0.1UF 10.00% 50V	KLV-S23A10	
2024		G1	CAPACITOR		C6526	1-107-906-11	ELECT 10UF 20% 50V	KLV-S23A10	
2025		G1	CAPACITOR		C6527	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
2026		G1	CAPACITOR		C6528	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V	KLV-S23A10	
2027		G1	CONNECTOR	△*	CN6001	1-691-960-11	PIN, CONNECTOR (PC BOARD) 3P	KLV-S23A10	
2028		G1	CONNECTOR	*	CN6200	1-564-595-11	PLUG, CONNECTOR 14P	KLV-S23A10	
2029		G1	CONNECTOR	*	CN6202	1-564-512-11	PLUG, CONNECTOR 9P	KLV-S23A10	
2030		G1	CONNECTOR	*	CN6203	1-564-508-11	PLUG, CONNECTOR 5P	KLV-S23A10	
2031		G1	DIODE		D6000	8-719-510-53	DIODE D4SB60L	KLV-S23A10	
2032		G1	DIODE		D6001	8-719-948-45	DIODE ERA22-08	KLV-S23A10	
2033		G1	DIODE		D6002	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
2034		G1	DIODE		D6102	6-500-137-01	DIODE BAT54HT1	KLV-S23A10	
2035		G1	DIODE		D6103	8-719-979-64	DIODE UF4005PKG23	KLV-S23A10	
2036		G1	DIODE		D6104	6-501-043-01	DIODE UMZ16NT106	KLV-S23A10	
2037		G1	DIODE		D6105	6-501-043-01	DIODE UMZ16NT106	KLV-S23A10	
2038		G1	DIODE		D6106	8-719-081-67	DIODE M1FM3	KLV-S23A10	
2039		G1	DIODE		D6107	8-719-081-67	DIODE M1FM3	KLV-S23A10	
2040		G1	DIODE		D6108	8-719-041-97	DIODE MA113-(TX)	KLV-S23A10	
2041		G1	DIODE		D6200	8-719-510-09	DIODE D10SC6M	KLV-S23A10	
2042		G1	DIODE		D6201	8-719-510-09	DIODE D10SC6M	KLV-S23A10	
2043		G1	DIODE		D6203	8-719-052-92	DIODE D10SBS4F	KLV-S23A10	
2044		G1	DIODE		D6204	6-500-567-31	DIODE 10ERB20-TB3	KLV-S23A10	
2045		G1	DIODE		D6205	6-500-567-31	DIODE 10ERB20-TB3	KLV-S23A10	
2046		G1	DIODE		D6207	8-719-510-09	DIODE D10SC6M	KLV-S23A10	
2047		G1	DIODE		D6300	8-719-077-76	DIODE D2SB60A-F04	KLV-S23A10	
2048		G1	DIODE		D6301	8-719-036-94	DIODE RD5.6SB-T1	KLV-S23A10	
2049		G1	DIODE		D6302	6-500-849-01	DIODE ERA22-08KFLB	KLV-S23A10	
2050		G1	DIODE		D6303	8-719-052-90	DIODE D1NL40-TA2	KLV-S23A10	
2051		G1	DIODE		D6304	8-719-052-90	DIODE D1NL40-TA2	KLV-S23A10	
2052		G1	DIODE		D6305	8-719-032-12	DIODE D1NS6	KLV-S23A10	
2053		G1	DIODE		D6307	6-500-567-31	DIODE 10ERB20-TB3	KLV-S23A10	
2054		G1	DIODE		D6400	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
2055		G1	DIODE		D6402	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
2056		G1	DIODE		D6408	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
2057		G1	DIODE		D6501	6-501-043-01	DIODE UMZ16NT106	KLV-S23A10	
2058		G1	DIODE		D6502	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
2059		G1	DIODE		D6506	8-719-054-59	DIODE FSF05A60	KLV-S23A10	
2060		G1	DIODE		D6509	6-500-108-01	DIODE EP05FA20	KLV-S23A10	
2061		G1	DIODE		D6510	6-500-137-01	DIODE BAT54HT1	KLV-S23A10	
2062		G1	DIODE		D6511	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
2063		G1	DIODE		D6512	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
2064		G1	DIODE		D6513	8-719-081-97	DIODE MMDL914T1	KLV-S23A10	
2065		G1	FUSE	△	F6000	1-576-867-11	FUSE 4A 250V	KLV-S23A10	
2066		G1	FERRITE BEAD		FB6100	1-410-397-21	FERRITE 1.1UH	KLV-S23A10	
2067		G1	FERRITE BEAD		FB6101	1-410-397-21	FERRITE 1.1UH	KLV-S23A10	
2068		G1	FUSE HOLDER		FH6000	1-533-223-11	FUSE HOLDER 0A 0V	KLV-S23A10	
2069		G1	FUSE HOLDER		FH6001	1-533-223-11	FUSE HOLDER 0A 0V	KLV-S23A10	
2070		G1	IC		IC6100	6-706-852-01	IC CXD9841M	KLV-S23A10	
2071		G1	IC		IC6200	8-759-682-42	IC MM1431ATT	KLV-S23A10	
2072		G1	IC		IC6300	6-600-279-01	IC STR-A6169	KLV-S23A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2073		G1	IC		IC6301	8-759-682-42	IC MM1431ATT	KLV-S23A10	
2074		G1	IC		IC6402	8-759-682-42	IC MM1431ATT	KLV-S23A10	
2075		G1	IC		IC6502	6-704-815-01	IC FA5501N-TE1	KLV-S23A10	
2076		G1	IC		IC6503	8-759-682-42	IC MM1431ATT	KLV-S23A10	
2077		G1	COIL	△	L6001	1-457-037-11	LINE FILTER COIL	KLV-S23A10	
2078		G1	COIL		L6201	1-406-971-21	INDUCTOR 10UH	KLV-S23A10	
2079		G1	COIL		L6203	1-414-487-41	INDUCTOR 1UH	KLV-S23A10	
2080		G1	COIL		L6204	1-414-487-41	INDUCTOR 1UH	KLV-S23A10	
2081		G1	COIL		L6300	1-414-934-21	INDUCTOR 10UH	KLV-S23A10	
2082		G1	COIL		L6500	1-457-039-12	INDUCTOR 110UH	KLV-S23A10	
2083		G1	COIL	△	L6502	1-456-950-11	INDUCTOR 380UH	KLV-S23A10	
2084		G1	PHOTO COUPLER		PH6000	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	KLV-S23A10	
2085		G1	PHOTO COUPLER	△	PH6100	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	KLV-S23A10	
2086		G1	PHOTO COUPLER		PH6300	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	KLV-S23A10	
2087		G1	PHOTO COUPLER		PH6400	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	KLV-S23A10	
2088		G1	PHOTO COUPLER	△	PH6402	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	KLV-S23A10	
2089		G1	PHOTO COUPLER	△	PH6501	6-600-187-01	PHOTO COUPLER PC123Y22JOOF	KLV-S23A10	
2090		G1	TRANSISTOR		Q6100	6-551-302-01	TRANSISTOR 2SK3561(LBS1SONY,Q	KLV-S23A10	
2091		G1	TRANSISTOR		Q6101	6-551-302-01	TRANSISTOR 2SK3561(LBS1SONY,Q	KLV-S23A10	
2092		G1	TRANSISTOR		Q6400	8-729-804-41	TRANSISTOR 2SB1122-S	KLV-S23A10	
2093		G1	TRANSISTOR		Q6401	8-729-120-28	TRANSISTOR 2SC1623-L5L6	KLV-S23A10	
2094		G1	TRANSISTOR		Q6402	8-729-023-22	TRANSISTOR 2SD2114K	KLV-S23A10	
2095		G1	TRANSISTOR		Q6403	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R	KLV-S23A10	
2096		G1	TRANSISTOR		Q6404	8-729-120-28	TRANSISTOR 2SC1623-L5L6	KLV-S23A10	
2097		G1	TRANSISTOR		Q6500	6-551-303-01	TRANSISTOR 2SK3683-01MR-F111	KLV-S23A10	
2098		G1	TRANSISTOR		Q6501	8-729-820-90	TRANSISTOR 2SD1621-ST	KLV-S23A10	
2099		G1	TRANSISTOR		Q6502	8-729-804-41	TRANSISTOR 2SB1122-S	KLV-S23A10	
2100		G1	TRANSISTOR		Q6503	8-729-026-49	TRANSISTOR 2SA1037AK-T146-R	KLV-S23A10	
2101		G1	TRANSISTOR		Q6504	8-729-120-28	TRANSISTOR 2SC1623-L5L6	KLV-S23A10	
2102		G1	RESISTOR	△	R6001	1-240-938-91	METAL 1.5M 5% 0.5W	KLV-S23A10	
2103		G1	RESISTOR		R6002	1-240-251-11	CEMENTED 6.8 5% 10W	KLV-S23A10	
2104		G1	RESISTOR		R6003	1-247-752-11	CARBON 1K 5% 1/2W	KLV-S23A10	
2105		G1	RESISTOR		R6004	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
2106		G1	RESISTOR		R6014	1-215-859-00	METAL OXIDE 22 5% 1W	KLV-S23A10	
2107		G1	RESISTOR		R6016	1-243-681-71	METAL OXIDE 33 5% 1W	KLV-S23A10	
2108		G1	RESISTOR		R6101	1-249-385-11	CARBON 2.2 5% 1/4W	KLV-S23A10	
2109		G1	RESISTOR		R6102	1-202-933-61	FUSIBLE 0.1 10% 1/2W	KLV-S23A10	
2110		G1	RESISTOR		R6103	1-211-985-11	METAL CHIP 47 0.5% 1/10W	KLV-S23A10	
2111		G1	RESISTOR		R6104	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
2112		G1	RESISTOR		R6105	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2113		G1	RESISTOR		R6106	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2114		G1	RESISTOR		R6107	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2115		G1	RESISTOR		R6108	1-208-836-11	METAL CHIP 180K 0.5% 1/10W	KLV-S23A10	
2116		G1	RESISTOR		R6109	1-208-834-11	METAL CHIP 150K 0.5% 1/10W	KLV-S23A10	
2117		G1	RESISTOR		R6110	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S23A10	
2118		G1	RESISTOR		R6111	1-218-873-11	METAL CHIP 12K 0.5% 1/10W	KLV-S23A10	
2119		G1	RESISTOR		R6114	1-211-977-11	METAL CHIP 22 0.5% 1/10W	KLV-S23A10	
2120		G1	RESISTOR		R6116	1-216-009-91	RES-CHIP 22 5% 1/10W	KLV-S23A10	
2121		G1	RESISTOR		R6117	1-216-009-91	RES-CHIP 22 5% 1/10W	KLV-S23A10	
2122		G1	RESISTOR		R6118	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
2123		G1	RESISTOR		R6119	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
2124		G1	RESISTOR		R6122	1-216-361-00	METAL OXIDE 0.22 5% 2W	KLV-S23A10	
2125		G1	RESISTOR		R6123	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	KLV-S23A10	
2126		G1	RESISTOR		R6127	1-216-857-11	METAL CHIP 1M 5% 1/10W	KLV-S23A10	
2127		G1	RESISTOR		R6200	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2128		G1	RESISTOR		R6201	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2129		G1	RESISTOR		R6203	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	KLV-S23A10	
2130		G1	RESISTOR		R6204	1-218-843-11	METAL CHIP 680 0.5% 1/10W	KLV-S23A10	
2131		G1	RESISTOR		R6205	1-218-865-11	METAL CHIP 5.6K 0.5% 1/10W	KLV-S23A10	
2132		G1	RESISTOR		R6207	1-218-847-11	METAL CHIP 1K 0.5% 1/10W	KLV-S23A10	
2133		G1	RESISTOR		R6208	1-249-377-11	CARBON 0.47 5% 1/4W	KLV-S23A10	
2134		G1	RESISTOR		R6226	1-249-389-11	CARBON 4.7 5% 1/4W	KLV-S23A10	
2135		G1	RESISTOR		R6300	1-249-381-11	CARBON 1 5% 1/4W	KLV-S23A10	
2136		G1	RESISTOR		R6301	1-216-353-00	METAL OXIDE 2.2 5% 1W	KLV-S23A10	
2137		G1	RESISTOR		R6305	1-260-129-11	CARBON 330K 5% 1/2W	KLV-S23A10	
2138		G1	RESISTOR		R6306	1-216-813-11	METAL CHIP 220 5% 1/10W	KLV-S23A10	
2139		G1	RESISTOR		R6307	1-249-385-11	CARBON 2.2 5% 1/4W	KLV-S23A10	
2140		G1	RESISTOR		R6308	1-249-393-11	CARBON 10 5% 1/4W	KLV-S23A10	
2141		G1	RESISTOR		R6310	1-216-817-11	METAL CHIP 470 5% 1/10W	KLV-S23A10	
2142		G1	RESISTOR		R6311	1-216-823-11	METAL CHIP 1.5K 5% 1/10W	KLV-S23A10	
2143		G1	RESISTOR		R6313	1-216-839-11	METAL CHIP 33K 5% 1/10W	KLV-S23A10	
2144		G1	RESISTOR		R6314	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
2145		G1	RESISTOR		R6315	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
2146		G1	RESISTOR		R6400	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2147		G1	RESISTOR		R6401	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S23A10	
2148		G1	RESISTOR		R6402	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
2149		G1	RESISTOR		R6403	1-218-887-11	METAL CHIP 47K 0.5% 1/10W	KLV-S23A10	
2150		G1	RESISTOR		R6404	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
2151		G1	RESISTOR		R6405	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
2152		G1	RESISTOR		R6407	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
2153		G1	RESISTOR		R6408	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S23A10	
2154		G1	RESISTOR		R6409	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
2155		G1	RESISTOR		R6410	1-216-823-11	METAL CHIP 1.5K 5% 1/10W	KLV-S23A10	
2156		G1	RESISTOR		R6412	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
2157		G1	RESISTOR		R6413	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W	KLV-S23A10	
2158		G1	RESISTOR		R6436	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
2159		G1	RESISTOR		R6437	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2160		G1	RESISTOR		R6441	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S23A10	
2161		G1	RESISTOR		R6442	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
2162		G1	RESISTOR		R6452	1-218-851-11	METAL CHIP 1.5K 0.5% 1/10W	KLV-S23A10	
2163		G1	RESISTOR		R6453	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
2164		G1	RESISTOR		R6454	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
2165		G1	RESISTOR		R6455	1-218-899-11	METAL CHIP 150K 0.5% 1/16W	KLV-S23A10	
2166		G1	RESISTOR		R6456	1-218-871-11	METAL CHIP 10K 0.5% 1/10W	KLV-S23A10	
2167		G1	RESISTOR		R6457	1-218-903-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2168		G1	RESISTOR		R6458	1-216-839-11	METAL CHIP 33K 5% 1/10W	KLV-S23A10	
2169		G1	RESISTOR		R6459	1-218-831-11	METAL CHIP 220 0.5% 1/10W	KLV-S23A10	
2170		G1	RESISTOR		R6503	1-215-882-00	METAL OXIDE 22 5% 2W	KLV-S23A10	
2171		G1	RESISTOR		R6505	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
2172		G1	RESISTOR		R6507	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2173		G1	RESISTOR		R6508	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
2174		G1	RESISTOR		R6509	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	KLV-S23A10	
2175		G1	RESISTOR		R6512	1-218-907-11	METAL CHIP 330K 0.5% 1/10W	KLV-S23A10	
2176		G1	RESISTOR		R6513	1-218-879-11	METAL CHIP 22K 0.5% 1/10W	KLV-S23A10	
2177		G1	RESISTOR		R6514	1-218-895-11	METAL CHIP 100K 0.5% 1/10W	KLV-S23A10	
2178		G1	RESISTOR		R6516	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2179		G1	RESISTOR		R6517	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2180		G1	RESISTOR		R6518	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2181		G1	RESISTOR		R6519	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2182		G1	RESISTOR		R6526	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2183		G1	RESISTOR		R6527	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
2184		G1	RESISTOR		R6528	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W	KLV-S23A10	
2185		G1	RESISTOR		R6531	1-217-611-00	METAL 0.1 10% 2W	KLV-S23A10	
2186		G1	RESISTOR		R6532	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
2187		G1	RESISTOR		R6533	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
2188		G1	RESISTOR		R6534	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
2189		G1	RESISTOR		R6537	1-249-389-11	CARBON 4.7 5% 1/4W	KLV-S23A10	
2190		G1	RESISTOR		R6538	1-249-405-11	CARBON 100 5% 1/4W	KLV-S23A10	
2191		G1	RESISTOR		R6539	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
2192		G1	RESISTOR		R6542	1-216-835-11	METAL CHIP 15K 5% 1/10W	KLV-S23A10	
2193		G1	RESISTOR		R6545	1-208-840-11	METAL CHIP 270K 0.5% 1/10W	KLV-S23A10	
2194		G1	RESISTOR		R6546	1-208-840-11	METAL CHIP 270K 0.5% 1/10W	KLV-S23A10	
2195		G1	RESISTOR		R6547	1-208-840-11	METAL CHIP 270K 0.5% 1/10W	KLV-S23A10	
2196		G1	RESISTOR		R6548	1-208-840-11	METAL CHIP 270K 0.5% 1/10W	KLV-S23A10	
2197		G1	RESISTOR		R6549	1-218-760-11	METAL CHIP 220K 0.5% 1/10W	KLV-S23A10	
2198		G1	RESISTOR		R6550	1-218-869-11	METAL CHIP 8.2K 0.5% 1/10W	KLV-S23A10	
2199		G1	RESISTOR		R6551	1-249-393-11	CARBON 10 5% 1/4W	KLV-S23A10	
2200		G1	RESISTOR		R6552	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
2201		G1	RESISTOR		R6553	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2202		G1	RESISTOR		R6554	1-216-833-11	METAL CHIP 10K 5% 1/10W	KLV-S23A10	
2203		G1	RESISTOR		R6555	1-216-845-11	METAL CHIP 100K 5% 1/10W	KLV-S23A10	
2204		G1	RESISTOR		R6556	1-216-837-11	METAL CHIP 22K 5% 1/10W	KLV-S23A10	
2205		G1	RESISTOR		R6557	1-218-823-11	METAL CHIP 100 0.5% 1/10W	KLV-S23A10	
2206		G1	RELAY	△	RY6003	1-755-418-12	RELAY (AC POWER)	KLV-S23A10	
2207		G1	RELAY	△	RY6004	1-755-418-12	RELAY (AC POWER)	KLV-S23A10	
2208		G1	TRANSFORMER	△	T6100	1-443-587-11	CONVERTER TRANSFORMER (PIT)	KLV-S23A10	
2209		G1	TRANSFORMER	△	T6300	1-443-313-21	TRANSFORMER, CONVERTER (SBT)	KLV-S23A10	
2210		G1	THERMISTOR		TH6300	1-803-586-41	THERMISTOR	KLV-S23A10	
2211		G1	VARISTOR	△	VD6000	1-805-479-21	VARISTOR	KLV-S23A10	
2212		G1	VARISTOR		VD6001	1-805-479-21	VARISTOR	KLV-S23A10	
2213		H2	CAPACITOR		C9041	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	KLV-S23A10	
2214		H2	CAPACITOR		C9048	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
2215		H2	CAPACITOR		C9049	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
2216		H2	CAPACITOR		C9050	1-165-815-91	CERAMIC CHIP 2.2UF 25V	KLV-S23A10	
2217		H2	CAPACITOR		C9077	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
2218		H2	CAPACITOR		C9078	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	
2219		H2	CAPACITOR		C9079	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	KLV-S23A10	
2220		H2	CAPACITOR		C9080	1-165-908-11	CERAMIC CHIP 1UF 10% 10V	KLV-S23A10	

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
2221		H2	CONNECTOR		CN9851	1-573-290-21	PIN, CONNECTOR (1.5MM) (SMD)4P	KLV-S23A10	
2222		H2	DIODE		D9035	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
2223		H2	DIODE		D9036	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
2224		H2	DIODE		D9037	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
2225		H2	DIODE		D9038	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
2226		H2	DIODE		D9058	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
2227		H2	DIODE		D9059	8-719-977-28	DIODE DTZ10B	KLV-S23A10	
2228		H2	JACK		J9006	1-780-244-11	TERMINAL BLOCK, S(RIGHT ANGLE)	KLV-S23A10	
2229		H2	JACK		J9852	1-815-325-11	JACK	KLV-S23A10	
2230		H2	RESISTOR		R9103	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
2231		H2	RESISTOR		R9104	1-218-285-11	METAL CHIP 75 5% 1/10W	KLV-S23A10	
2232		H2	RESISTOR		R9105	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
2233		H2	RESISTOR		R9108	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
2234		H2	RESISTOR		R9109	1-216-811-11	METAL CHIP 150 5% 1/10W	KLV-S23A10	
2235		H2	RESISTOR		R9112	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
2236		H2	RESISTOR		R9113	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
2237		H2	RESISTOR		R9114	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2238		H2	RESISTOR		R9115	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2239		H2	RESISTOR		R9116	1-216-809-11	METAL CHIP 100 5% 1/10W	KLV-S23A10	
2240		H2	RESISTOR		R9136	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
2241		H2	RESISTOR		R9137	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2242		H2	RESISTOR		R9138	1-216-853-11	METAL CHIP 470K 5% 1/10W	KLV-S23A10	
2243		H2	RESISTOR		R9139	1-216-821-11	METAL CHIP 1K 5% 1/10W	KLV-S23A10	
2244		H2	RESISTOR		R9142	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
2245		H2	RESISTOR		R9851	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
2246		H2	RESISTOR		R9852	1-216-864-11	SHORT CHIP 0	KLV-S23A10	
2247		H2	VARISTOR		VD9851	1-803-974-21	VARISTOR, CHIP (1608)	KLV-S23A10	
2248		H2	VARISTOR		VD9852	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S23A10	
2249		H2	VARISTOR		VD9853	1-801-925-21	VARISTOR, CHIP (1608)	KLV-S23A10	



# SERVICE MANUAL

## FOR BOARD REPAIR CENTER

**WAX** CHASSIS

*KLVS19A10*

*KLVS23A10*

*US Model*

*Canadian Model*

This document describes the schematic diagrams and printed wiring boards and electrical parts list of board replacement service target boards only.

See the main Service Manual for other boards.

## TABLE OF CONTENTS


<b>1. B BOARD .....</b>	<b>3</b>
1-1. Schematic Diagrams .....	3
B (1/6) Board.....	3
B (2/6) Board.....	4
B (3/6) Board.....	5
B (4/6) Board.....	6
B (5/6) Board.....	7
B (6/6) Board.....	8
1-2. Printed Wiring Boards.....	9
B Board (A side) .....	9
B Board (B side) .....	9
<b>2. P BOARD .....</b>	<b>10</b>
2-1. Schematic Diagram .....	10
P Board .....	10
2-2. Printed Wiring Boards.....	11
P Board (A side) .....	11
P Board (B side) .....	11
<b>3. ELECTRICAL PARTS LIST .....</b>	<b>12</b>



# 1. B BOARD


## 1-1. Schematic Diagrams

B (1/6) Board

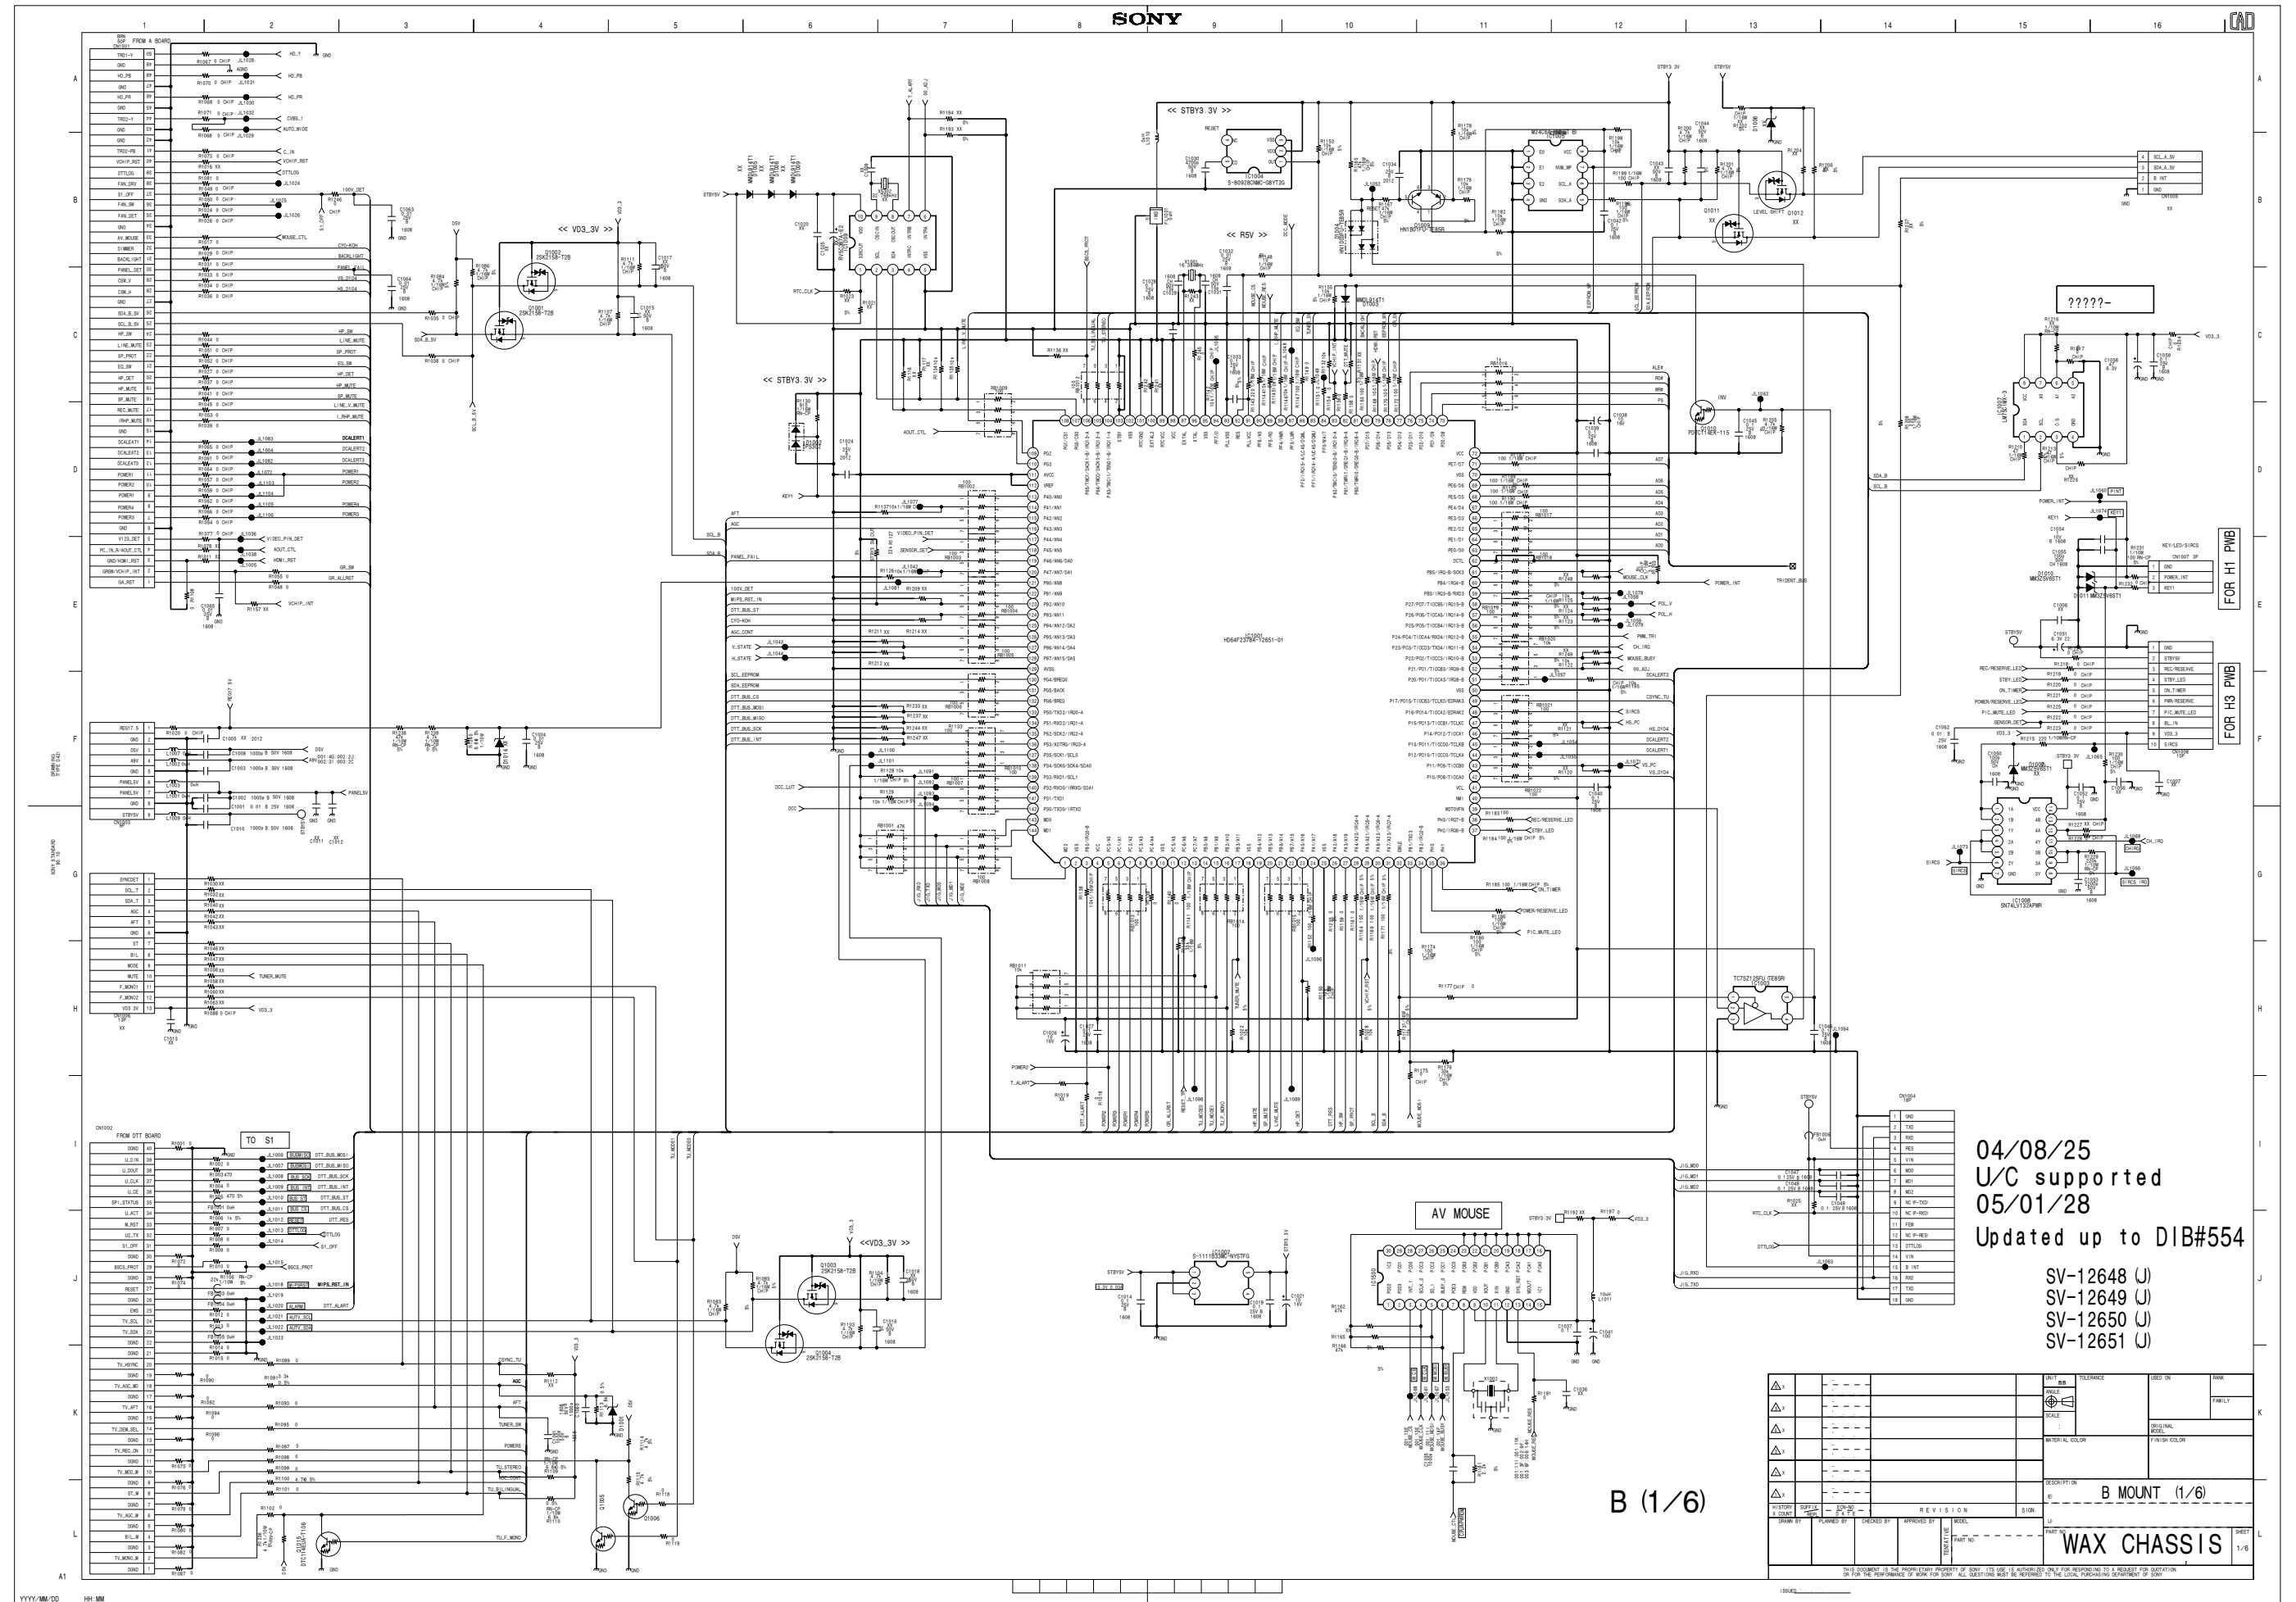




B (3/6) Board

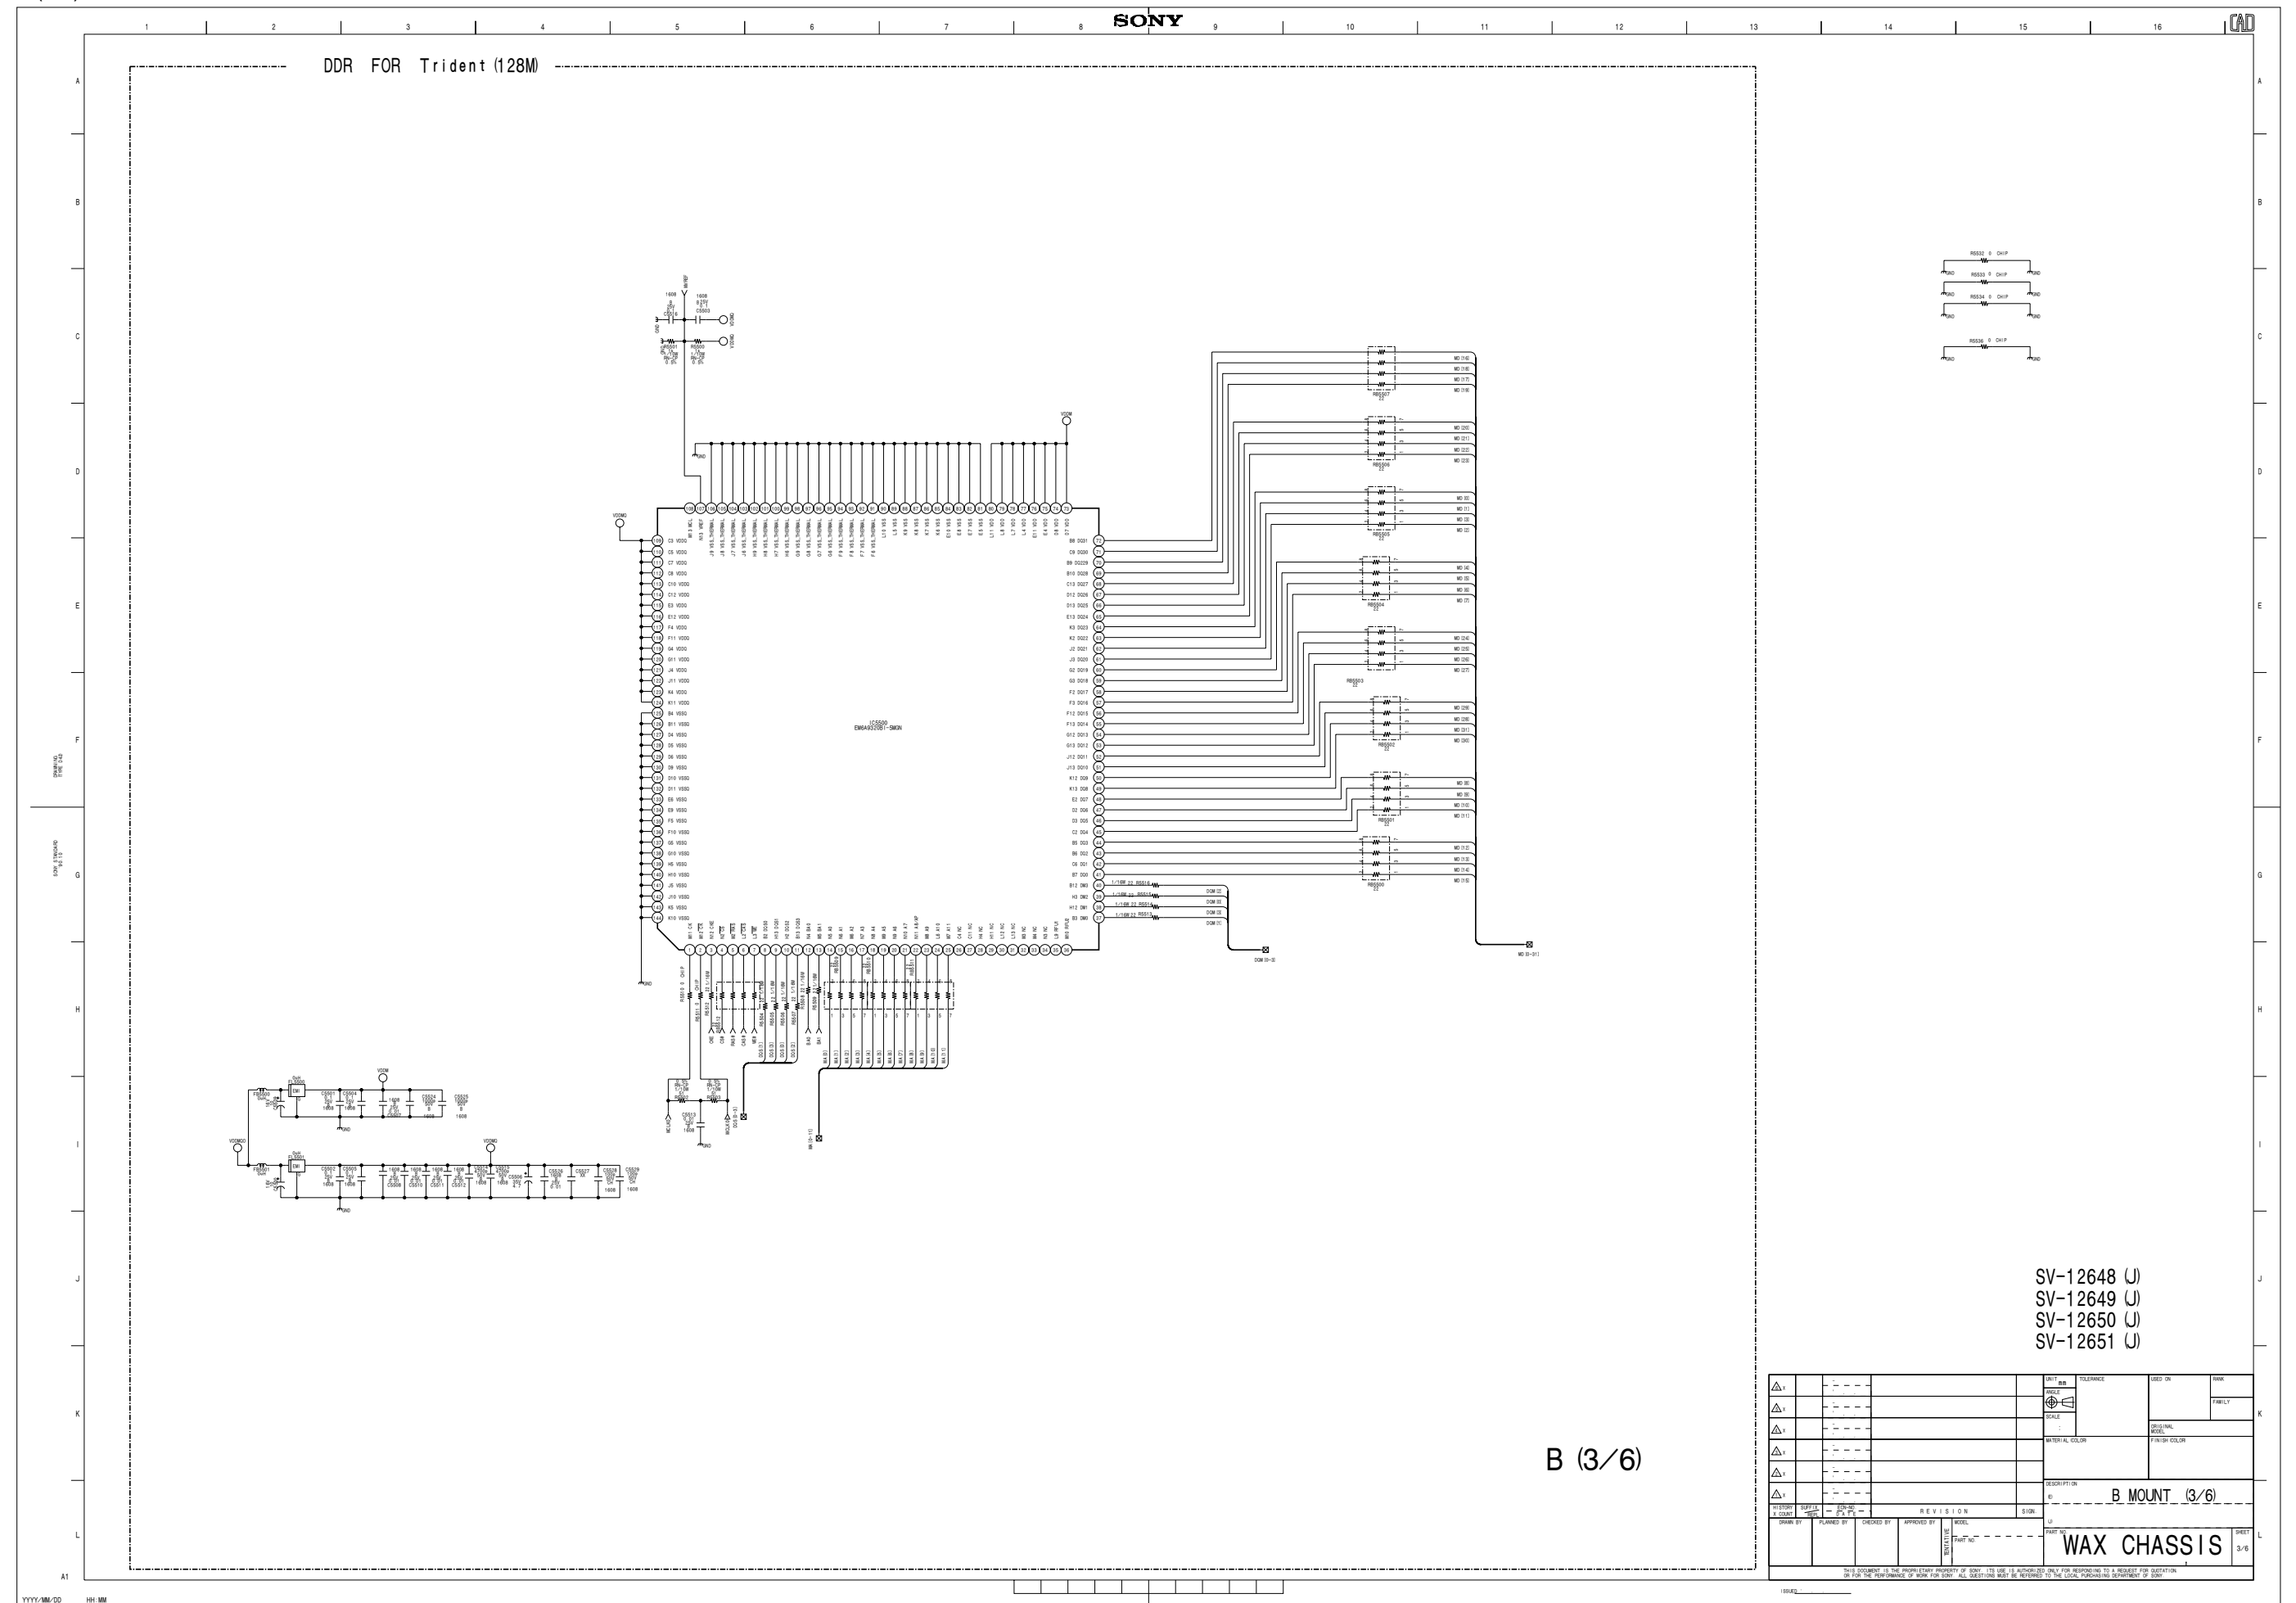




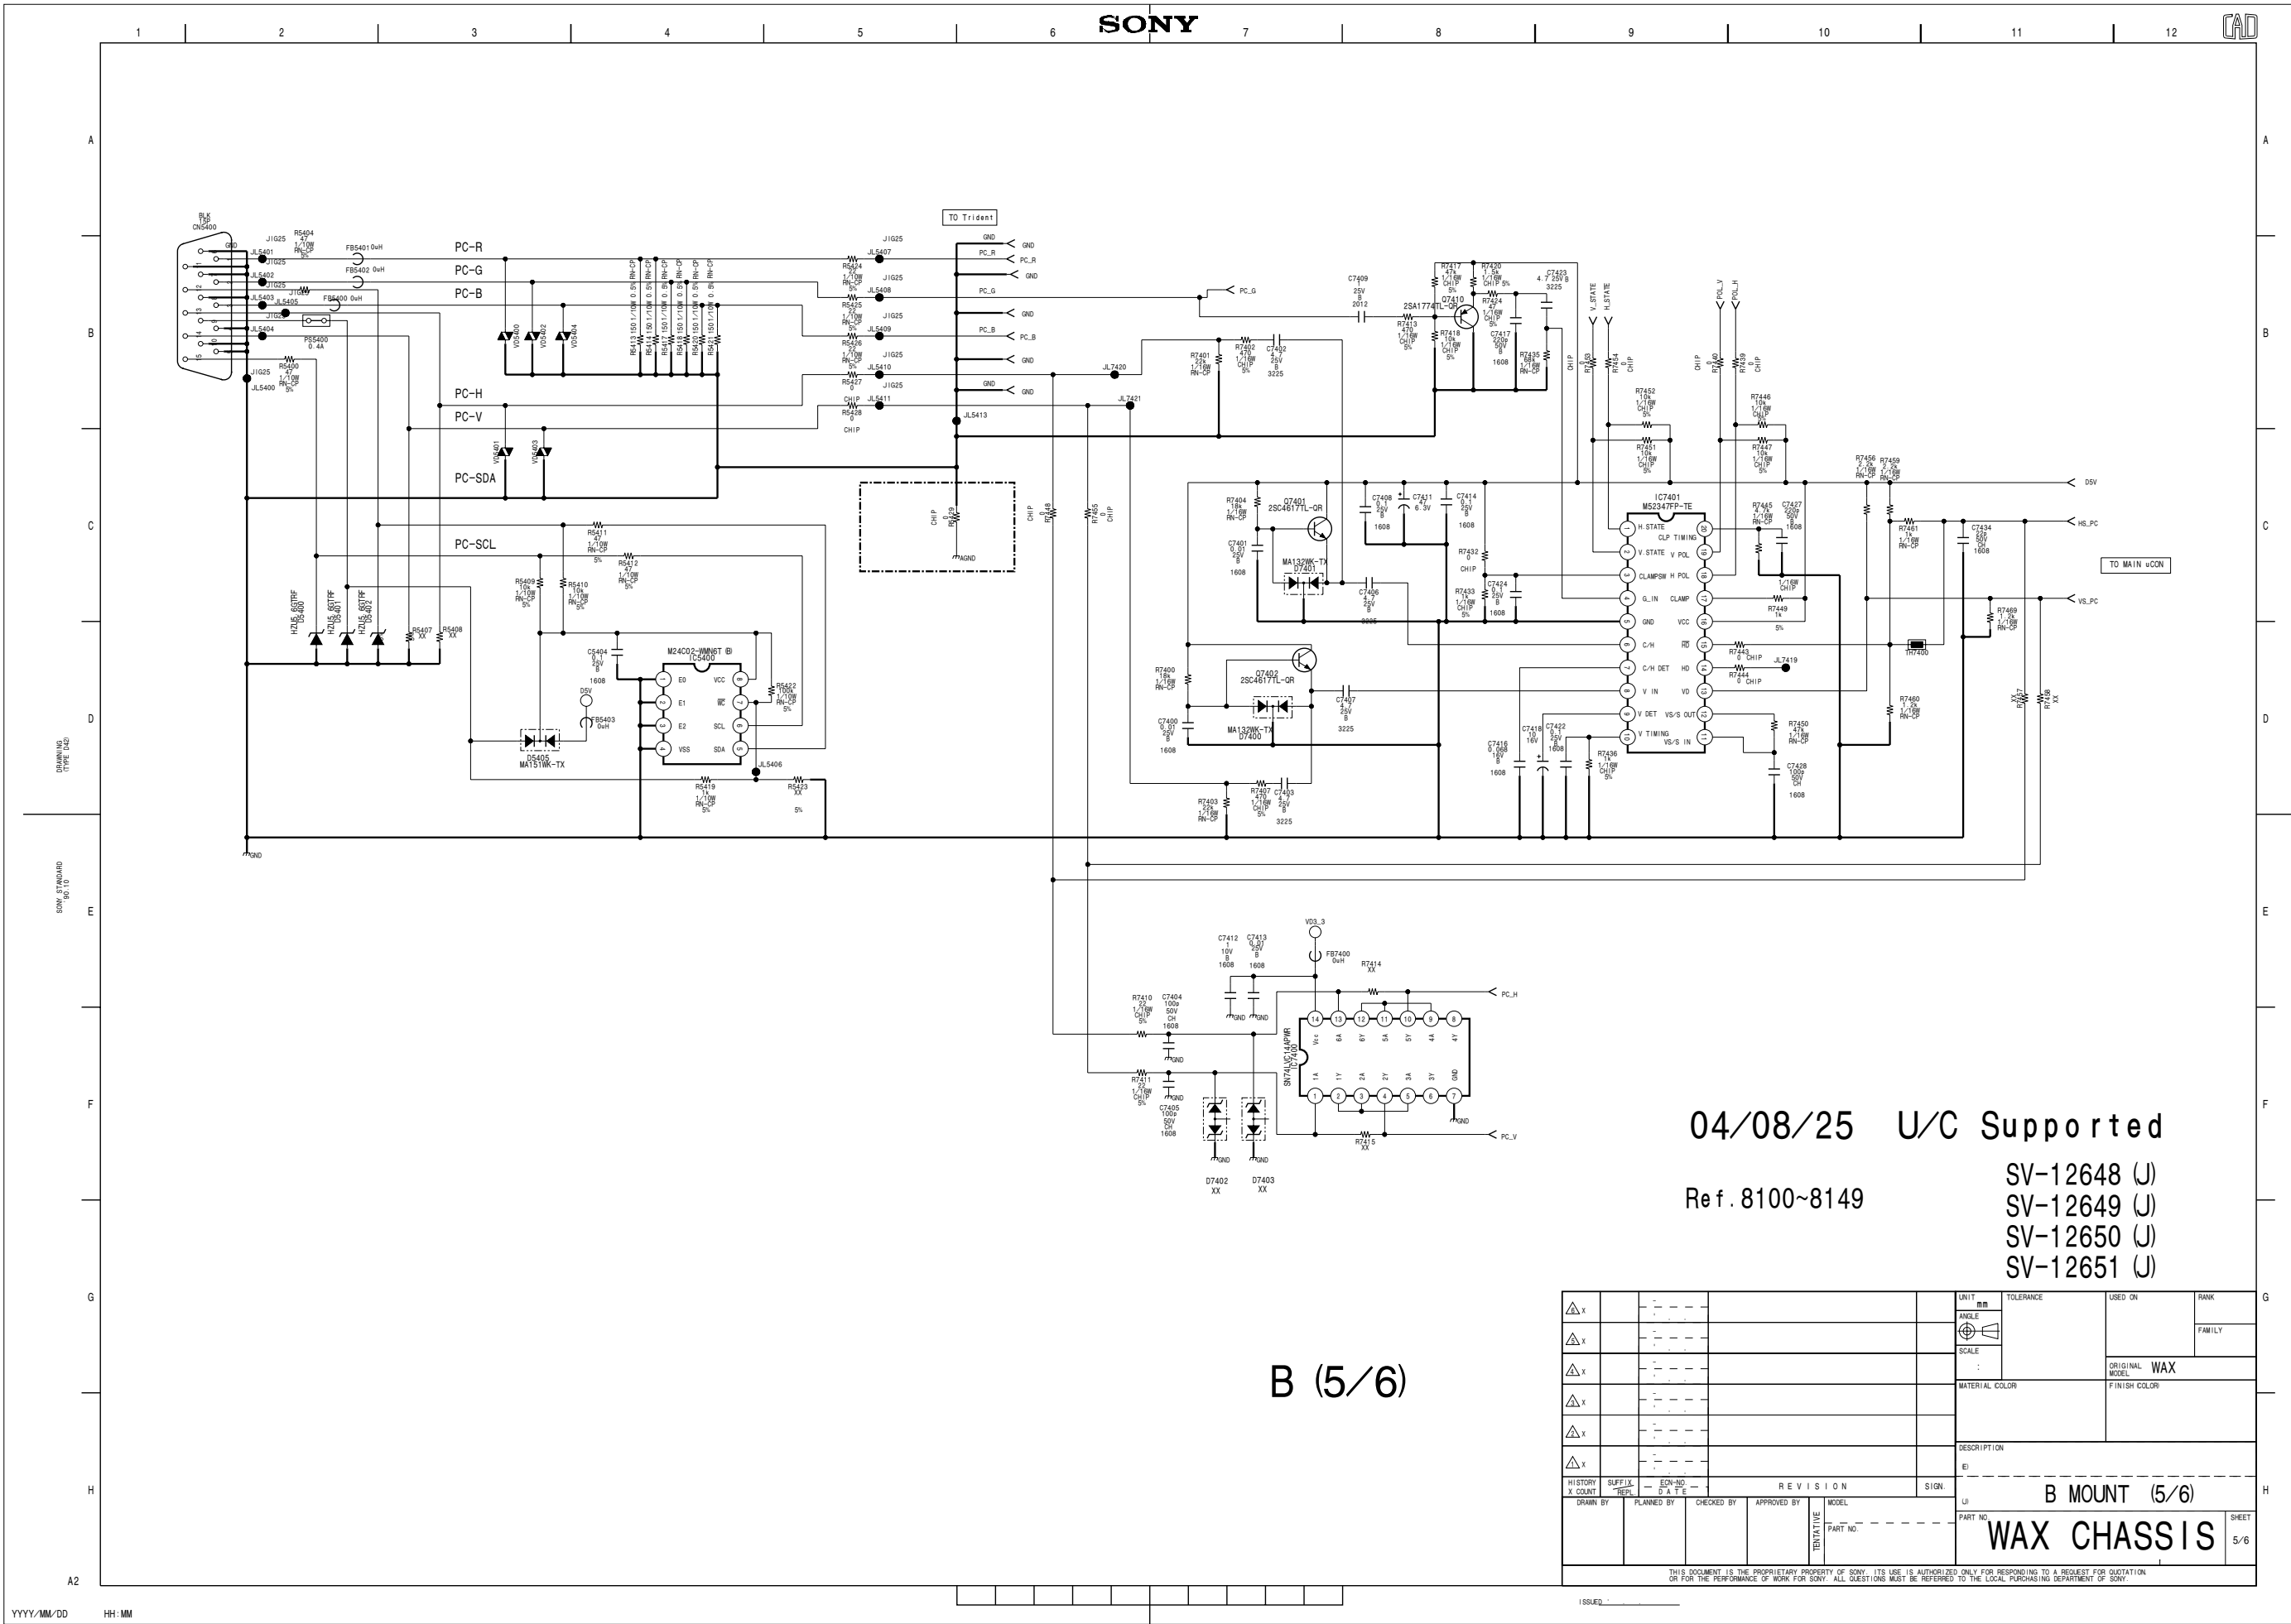




1-2. Printed Wiring Boards  
B Board

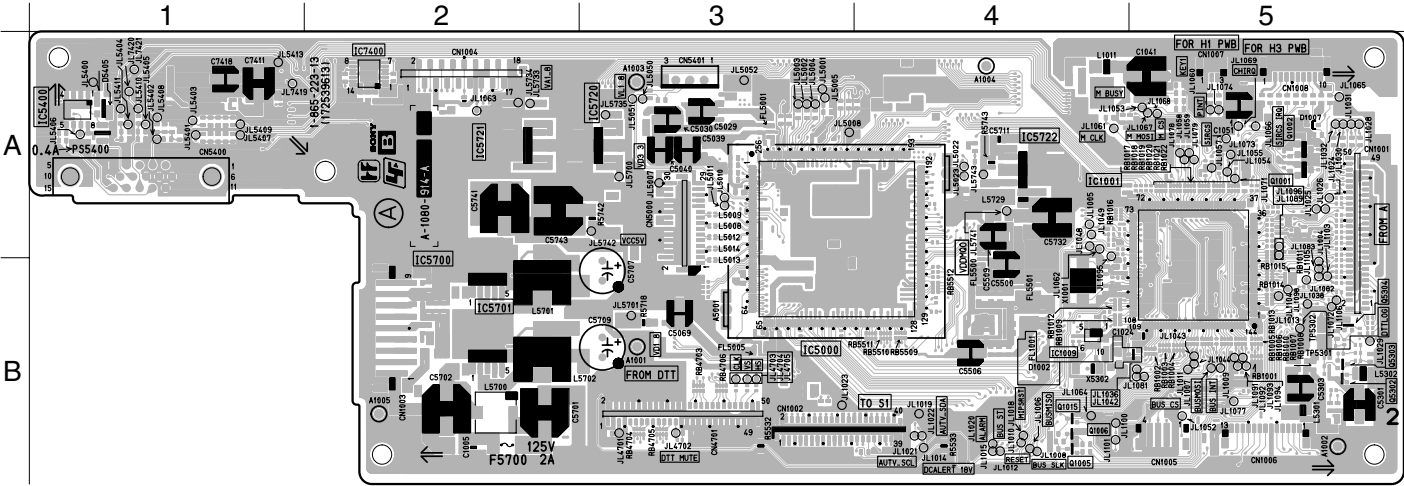


<COMPONENT SIDE>

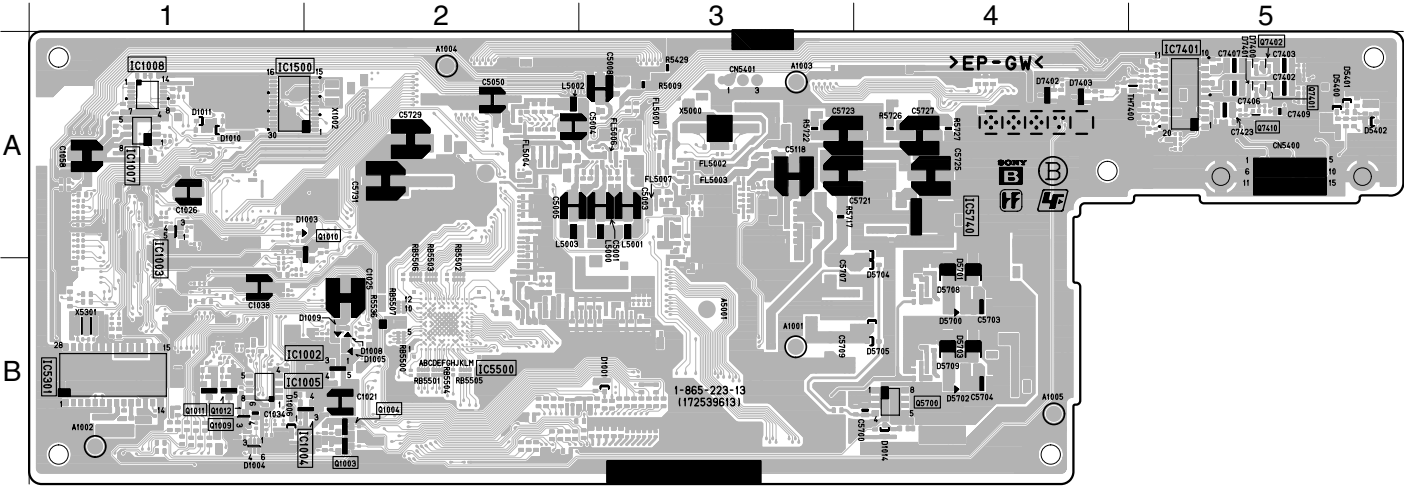

<CONDUCTOR SIDE>

P Board





## P Board



B



B

### 3. ELECTRICAL PARTS LIST

#### NOTE:

The components identified ⚠ marked are critical for safety.  
Replace only with the part number specified.

Les composants identifiés par la marque ⚠ sont critiques pour la sécurité.  
Ne les remplacer que par une pièce portant le numéro spécifié.

When indicating parts by reference number, please include the board name.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- Items marked " \* " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

#### RESISTORS

- All resistors are in ohms
- F : nonflammable

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
1		P	CAPACITOR		C5000	1-126-193-11	ELECT CHIP 1UF 20.00% 50V		
2		P	CAPACITOR		C5001	1-126-193-11	ELECT CHIP 1UF 20.00% 50V		
3		P	CAPACITOR		C5002	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
4		P	CAPACITOR		C5003	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
5		P	CAPACITOR		C5004	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
6		P	CAPACITOR		C5005	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
7		P	CAPACITOR		C5006	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
8		P	CAPACITOR		C5007	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
9		P	CAPACITOR		C5008	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
10		P	CAPACITOR		C5009	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
11		P	CAPACITOR		C5010	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
12		P	CAPACITOR		C5011	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
13		P	CAPACITOR		C5012	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
14		P	CAPACITOR		C5013	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
15		P	CAPACITOR		C5014	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
16		P	CAPACITOR		C5015	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
17		P	CAPACITOR		C5016	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
18		P	CAPACITOR		C5017	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
19		P	CAPACITOR		C5018	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
20		P	CAPACITOR		C5019	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
21		P	CAPACITOR		C5020	1-165-176-11	CERAMIC CHIP 0.047UF 10.00% 16V		
22		P	CAPACITOR		C5021	1-127-692-11	CERAMIC CHIP 10UF 10% 16V		
23		P	CAPACITOR		C5022	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
24		P	CAPACITOR		C5023	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
25		P	CAPACITOR		C5024	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
26		P	CAPACITOR		C5025	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
27		P	CAPACITOR		C5026	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
28		P	CAPACITOR		C5027	1-126-396-11	ELECT CHIP 47UF 20.00% 16V		
29		P	CAPACITOR		C5028	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
30		P	CAPACITOR		C5100	1-100-588-21	ELECT CHIP 1000UF 20% 6.3V		
31		P	CAPACITOR		C5102	1-137-897-21	ELECT CHIP 150UF 20% 4V		
32		P	CAPACITOR		C5103	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
33		P	CAPACITOR		C5104	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
34		P	CAPACITOR		C5105	1-100-118-21	ELECT CHIP 82UF 20% 16V		
35		P	CAPACITOR		C5107	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
36		P	CAPACITOR		C5108	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
37		P	CAPACITOR		C5200	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
38		P	CAPACITOR		C5201	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
39		P	CAPACITOR		C5202	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
40		P	CAPACITOR		C5203	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
41		P	CAPACITOR		C5204	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
42		P	CAPACITOR		C5205	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
43		P	CAPACITOR		C5206	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
44		P	CAPACITOR		C5207	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
45		P	CAPACITOR		C5208	1-128-993-21	ELECT CHIP 22UF 20% 10V		
46		P	CAPACITOR		C5209	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
47		P	CAPACITOR		C5210	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
48		P	CAPACITOR		C5211	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V		
49		P	CAPACITOR		C5212	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
50		P	CAPACITOR		C5213	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
51		P	CAPACITOR		C5214	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
52		P	CAPACITOR		C5215	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
53		P	CAPACITOR		C5216	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
54		P	CAPACITOR		C5217	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
55		P	CAPACITOR		C5218	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
56		P	CAPACITOR		C5219	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
57		P	CAPACITOR		C5220	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
58		P	CAPACITOR		C5221	1-164-230-11	CERAMIC CHIP 220PF 5.00% 50V		
59		P	CAPACITOR		C5222	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
60		P	CAPACITOR		C5223	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
61		P	CAPACITOR		C5224	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
62		P	CAPACITOR		C5225	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
63		P	CAPACITOR		C5226	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		
64		P	CAPACITOR		C5227	1-128-993-21	ELECT CHIP 22UF 20% 10V		
65		P	CAPACITOR		C5228	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
66		P	CAPACITOR		C5229	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
67		P	CAPACITOR		C5230	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
68		P	CAPACITOR		C5231	1-126-412-11	ELECT CHIP 220UF 20.00% 4V		
69		P	CAPACITOR		C5232	1-128-993-21	ELECT CHIP 22UF 20% 10V		
70		P	CAPACITOR		C5233	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
71		P	CAPACITOR		C5234	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
72		P	CAPACITOR		C5300	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
73		P	CAPACITOR		C5301	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
74		P	CAPACITOR		C5302	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
75		P	CAPACITOR		C5303	1-162-916-11	CERAMIC CHIP 12PF 5.00% 50V		
76		P	CAPACITOR		C5304	1-162-916-11	CERAMIC CHIP 12PF 5.00% 50V		
77		P	CONNECTOR	*	CN5000	1-818-400-11	HDMI CONNECTOR		
78		P	CONNECTOR		CN5002	1-794-519-21	PIN, CONNECTOR (PC BOARD) 14P		
79		P	DIODE		D5001	8-719-977-28	DIODE DTZ10B		
80		P	DIODE		D5003	8-719-977-28	DIODE DTZ10B		
81		P	DIODE		D5006	8-719-074-43	DIODE BAS316-115		
82		P	DIODE		D5007	8-719-074-43	DIODE BAS316-115		
83		P	DIODE		D5100	6-500-294-01	DIODE PTZ-TE25-3.9B		
84		P	DIODE		D5101	8-719-210-39	DIODE EC10QS-04		
85		P	FERRITE BEAD		FB5000	1-414-235-22	FERRITE 0UH		
86		P	FERRITE BEAD		FB5001	1-414-235-22	FERRITE 0UH		
87		P	FERRITE BEAD		FB5002	1-414-235-22	FERRITE 0UH		
88		P	FERRITE BEAD		FB5003	1-414-235-22	FERRITE 0UH		
89		P	FERRITE BEAD		FB5004	1-414-445-11	FERRITE 0UH		
90		P	FERRITE BEAD		FB5200	1-414-235-22	FERRITE 0UH		
91		P	FERRITE BEAD		FB5201	1-414-235-22	FERRITE 0UH		
92		P	FERRITE BEAD		FB5202	1-414-235-22	FERRITE 0UH		
93		P	FERRITE BEAD		FB5203	1-414-235-22	FERRITE 0UH		
94		P	FILTER	*	FL5000	1-813-308-11	INDUCTOR 0UH		
95		P	FILTER	*	FL5001	1-813-308-11	INDUCTOR 0UH		
96		P	FILTER	*	FL5002	1-813-308-11	INDUCTOR 0UH		
97		P	FILTER	*	FL5003	1-813-308-11	INDUCTOR 0UH		
98		P	FILTER		FL5004	1-234-177-21	FERRITE 0UH		
99		P	IC		IC5000	6-704-001-01	IC BR24L02F-WE2		
100		P	IC		IC5001	6-704-499-01	IC SII9993CTG100		
101		P	IC		IC5100	6-704-407-01	IC PQ1CZ41H2ZPH		
102		P	IC		IC5101	8-759-533-85	IC L88M05T-FA-TL		
103		P	IC		IC5200	6-704-819-01	IC CS4335-KSZR		
104		P	IC		IC5201	6-706-257-01	IC FMS6418AM16X		
105		P	IC		IC5202	8-759-382-59	IC RC4558DR		
106		P	IC		IC5203	6-703-042-01	IC CD4052BNSR		
107		P	IC		IC5301	6-804-249-01	IC HD6433692A39FXV		
108		P	JACK		J5000	1-794-623-21	JACK, PIN 2P		
109		P	COIL		L5001	1-412-026-11	INDUCTOR 1UH		
110		P	COIL		L5100	1-456-046-21	INDUCTOR 10UH		
111		P	COIL		L5101	1-400-303-21	INDUCTOR 68UH		
112		P	IC LINK	△	PS5100	1-576-612-21	FUSE 1A 32V		
113		P	IC LINK	△	PS5101	1-576-647-11	FUSE 0.2A 50V		
114		P	TRANSISTOR		Q5000	8-729-421-22	TRANSISTOR UN2211		
115		P	TRANSISTOR		Q5001	6-550-014-01	TRANSISTOR SSM6N15FU(TE85R)		
116		P	TRANSISTOR		Q5002	8-729-421-22	TRANSISTOR UN2211		
117		P	TRANSISTOR		Q5200	8-729-027-62	TRANSISTOR DTC144WKA-T146		
118		P	TRANSISTOR		Q5201	8-729-024-88	TRANSISTOR MUN2212T1		
119		P	TRANSISTOR		Q5202	8-729-024-88	TRANSISTOR MUN2212T1		
120		P	TRANSISTOR		Q5204	8-729-421-22	TRANSISTOR UN2211		
121		P	TRANSISTOR		Q5205	8-729-421-22	TRANSISTOR UN2211		
122		P	TRANSISTOR		Q5300	8-729-027-62	TRANSISTOR DTC144WKA-T146		
123		P	RESISTOR		R5000	1-218-644-11	METAL CHIP 10 0.5% 1/10W		
124		P	RESISTOR		R5001	1-216-845-11	METAL CHIP 100K 5% 1/10W		
125		P	RESISTOR		R5002	1-216-821-11	METAL CHIP 1K 5% 1/10W		
126		P	RESISTOR		R5003	1-216-845-11	METAL CHIP 100K 5% 1/10W		
127		P	RESISTOR		R5006	1-216-833-11	METAL CHIP 10K 5% 1/10W		
128		P	RESISTOR		R5009	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
129		P	RESISTOR		R5010	1-216-809-11	METAL CHIP 100 5% 1/10W		
130		P	RESISTOR		R5011	1-216-809-11	METAL CHIP 100 5% 1/10W		
131		P	RESISTOR		R5012	1-216-809-11	METAL CHIP 100 5% 1/10W		
132		P	RESISTOR		R5013	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
133		P	RESISTOR		R5015	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
134		P	RESISTOR		R5017	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
135		P	RESISTOR		R5019	1-216-816-11	METAL CHIP 390 5% 1/10W		
136		P	RESISTOR		R5020	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
137		P	RESISTOR		R5021	1-218-854-11	METAL CHIP 2K 0.5% 1/10W		
138		P	RESISTOR		R5022	1-218-823-11	METAL CHIP 100 0.5% 1/10W		
139		P	RESISTOR		R5023	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
140		P	RESISTOR		R5024	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
141		P	RESISTOR		R5025	1-216-803-11	METAL CHIP 33 5% 1/10W		
142		P	RESISTOR		R5026	1-216-803-11	METAL CHIP 33 5% 1/10W		
143		P	RESISTOR		R5027	1-216-803-11	METAL CHIP 33 5% 1/10W		
144		P	RESISTOR		R5103	1-218-701-11	METAL CHIP 2.4K 0.5% 1/10W		
145		P	RESISTOR		R5104	1-218-706-11	METAL CHIP 3.9K 0.5% 1/10W		
146		P	RESISTOR		R5105	1-216-864-11	SHORT CHIP 0		
147		P	RESISTOR		R5106	1-216-864-11	SHORT CHIP 0		
148		P	RESISTOR		R5201	1-216-845-11	METAL CHIP 100K 5% 1/10W		

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
149		P	RESISTOR		R5202	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
150		P	RESISTOR		R5203	1-216-833-11	METAL CHIP 10K 5% 1/10W		
151		P	RESISTOR		R5204	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
152		P	RESISTOR		R5205	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
153		P	RESISTOR		R5206	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
154		P	RESISTOR		R5207	1-216-845-11	METAL CHIP 100K 5% 1/10W		
155		P	RESISTOR		R5209	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
156		P	RESISTOR		R5212	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
157		P	RESISTOR		R5213	1-216-841-11	METAL CHIP 47K 5% 1/10W		
158		P	RESISTOR		R5214	1-216-857-11	METAL CHIP 1M 5% 1/10W		
159		P	RESISTOR		R5215	1-216-821-11	METAL CHIP 1K 5% 1/10W		
160		P	RESISTOR		R5216	1-216-857-11	METAL CHIP 1M 5% 1/10W		
161		P	RESISTOR		R5217	1-216-821-11	METAL CHIP 1K 5% 1/10W		
162		P	RESISTOR		R5218	1-216-857-11	METAL CHIP 1M 5% 1/10W		
163		P	RESISTOR		R5219	1-216-821-11	METAL CHIP 1K 5% 1/10W		
164		P	RESISTOR		R5222	1-216-857-11	METAL CHIP 1M 5% 1/10W		
165		P	RESISTOR		R5223	1-216-857-11	METAL CHIP 1M 5% 1/10W		
166		P	RESISTOR		R5225	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
167		P	RESISTOR		R5227	1-216-857-11	METAL CHIP 1M 5% 1/10W		
168		P	RESISTOR		R5231	1-218-694-11	METAL CHIP 1.2K 0.5% 1/10W		
169		P	RESISTOR		R5232	1-216-833-11	METAL CHIP 10K 5% 1/10W		
170		P	RESISTOR		R5233	1-218-716-11	METAL CHIP 10K 0.5% 1/10W		
171		P	RESISTOR		R5234	1-216-841-11	METAL CHIP 47K 5% 1/10W		
172		P	RESISTOR		R5235	1-216-845-11	METAL CHIP 100K 5% 1/10W		
173		P	RESISTOR		R5236	1-216-821-11	METAL CHIP 1K 5% 1/10W		
174		P	RESISTOR		R5237	1-218-686-11	METAL CHIP 560 0.5% 1/10W		
175		P	RESISTOR		R5238	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
176		P	RESISTOR		R5239	1-218-694-11	METAL CHIP 1.2K 0.5% 1/10W		
177		P	RESISTOR		R5240	1-218-716-11	METAL CHIP 10K 0.5% 1/10W		
178		P	RESISTOR		R5241	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
179		P	RESISTOR		R5242	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
180		P	RESISTOR		R5243	1-218-665-11	METAL CHIP 75 0.5% 1/10W		
181		P	RESISTOR		R5244	1-216-845-11	METAL CHIP 100K 5% 1/10W		
182		P	RESISTOR		R5245	1-218-686-11	METAL CHIP 560 0.5% 1/10W		
183		P	RESISTOR		R5247	1-216-845-11	METAL CHIP 100K 5% 1/10W		
184		P	RESISTOR		R5248	1-216-821-11	METAL CHIP 1K 5% 1/10W		
185		P	RESISTOR		R5249	1-216-845-11	METAL CHIP 100K 5% 1/10W		
186		P	RESISTOR		R5250	1-216-845-11	METAL CHIP 100K 5% 1/10W		
187		P	RESISTOR		R5251	1-216-809-11	METAL CHIP 100 5% 1/10W		
188		P	RESISTOR		R5252	1-216-845-11	METAL CHIP 100K 5% 1/10W		
189		P	RESISTOR		R5253	1-216-821-11	METAL CHIP 1K 5% 1/10W		
190		P	RESISTOR		R5254	1-216-817-11	METAL CHIP 470 5% 1/10W		
191		P	RESISTOR		R5255	1-216-817-11	METAL CHIP 470 5% 1/10W		
192		P	RESISTOR		R5258	1-216-845-11	METAL CHIP 100K 5% 1/10W		
193		P	RESISTOR		R5259	1-216-837-11	METAL CHIP 22K 5% 1/10W		
194		P	RESISTOR		R5260	1-216-837-11	METAL CHIP 22K 5% 1/10W		
195		P	RESISTOR		R5261	1-216-821-11	METAL CHIP 1K 5% 1/10W		
196		P	RESISTOR		R5262	1-216-809-11	METAL CHIP 100 5% 1/10W		
197		P	RESISTOR		R5265	1-216-821-11	METAL CHIP 1K 5% 1/10W		
198		P	RESISTOR		R5266	1-216-821-11	METAL CHIP 1K 5% 1/10W		
199		P	RESISTOR		R5302	1-216-833-11	METAL CHIP 10K 5% 1/10W		
200		P	RESISTOR		R5303	1-216-833-11	METAL CHIP 10K 5% 1/10W		
201		P	RESISTOR		R5304	1-216-809-11	METAL CHIP 100 5% 1/10W		
202		P	RESISTOR		R5305	1-216-809-11	METAL CHIP 100 5% 1/10W		
203		P	RESISTOR		R5306	1-216-809-11	METAL CHIP 100 5% 1/10W		
204		P	RESISTOR		R5307	1-216-809-11	METAL CHIP 100 5% 1/10W		
205		P	RESISTOR		R5308	1-216-809-11	METAL CHIP 100 5% 1/10W		
206		P	RESISTOR		R5309	1-216-833-11	METAL CHIP 10K 5% 1/10W		
207		P	RESISTOR		R5310	1-216-833-11	METAL CHIP 10K 5% 1/10W		
208		P	RESISTOR		R5311	1-216-833-11	METAL CHIP 10K 5% 1/10W		
209		P	RESISTOR		R5312	1-216-833-11	METAL CHIP 10K 5% 1/10W		
210		P	RESISTOR		R5313	1-216-833-11	METAL CHIP 10K 5% 1/10W		
211		P	RESISTOR		R5314	1-216-833-11	METAL CHIP 10K 5% 1/10W		
212		P	RESISTOR		R5315	1-216-809-11	METAL CHIP 100 5% 1/10W		
213		P	RESISTOR		R5317	1-216-809-11	METAL CHIP 100 5% 1/10W		
214		P	RESISTOR		R5320	1-216-809-11	METAL CHIP 100 5% 1/10W		
215		P	RESISTOR		R5321	1-216-809-11	METAL CHIP 100 5% 1/10W		
216		P	RESISTOR		R5322	1-216-809-11	METAL CHIP 100 5% 1/10W		
217		P	RESISTOR		R5323	1-216-809-11	METAL CHIP 100 5% 1/10W		
218		P	RESISTOR		R5325	1-216-809-11	METAL CHIP 100 5% 1/10W		
219		P	RESISTOR		R5326	1-216-809-11	METAL CHIP 100 5% 1/10W		
220		P	NETWORK		RB5000	1-233-574-11	RES, CHIP NETWORK 10 (3216)		
221		P	NETWORK		RB5001	1-233-574-11	RES, CHIP NETWORK 10 (3216)		
222		P	NETWORK		RB5002	1-234-524-21	RES, CHIP NETWORK 33 (3216)		

No.	#	Board	Type	$\Delta/\mu$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
223		P	NETWORK		RB5300	1-236-908-11	RES, CHIP NETWORK 10K (3216)		
224		P	VARISTOR		VD5000	1-805-043-11	ABSORBER, CHIP SURGE		
225		P	VARISTOR		VD5001	1-805-043-11	ABSORBER, CHIP SURGE		
226		P	VARISTOR		VD5002	1-805-043-11	ABSORBER, CHIP SURGE		
227		P	VARISTOR		VD5003	1-805-043-11	ABSORBER, CHIP SURGE		
228		P	VARISTOR		VD5004	1-805-043-11	ABSORBER, CHIP SURGE		
229		P	VARISTOR		VD5005	1-805-043-11	ABSORBER, CHIP SURGE		
230		P	VARISTOR		VD5006	1-805-043-11	ABSORBER, CHIP SURGE		
231		P	VARISTOR		VD5007	1-805-043-11	ABSORBER, CHIP SURGE		
232		P	VARISTOR		VD5008	1-805-043-11	ABSORBER, CHIP SURGE		
233		P	VARISTOR		VD5009	1-805-043-11	ABSORBER, CHIP SURGE		
234		P	CRYSTAL		X5300	1-767-984-21	VIBRATOR, CRYSTAL		
235		B	CAPACITOR		C1001	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
236		B	CAPACITOR		C1002	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
237		B	CAPACITOR		C1003	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
238		B	CAPACITOR		C1004	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
239		B	CAPACITOR		C1008	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
240		B	CAPACITOR		C1010	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
241		B	CAPACITOR		C1014	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
242		B	CAPACITOR		C1019	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
243		B	CAPACITOR		C1020	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
244		B	CAPACITOR		C1021	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
245		B	CAPACITOR		C1024	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
246		B	CAPACITOR		C1025	1-126-206-11	ELECT CHIP 100UF 20.00% 6.3V		
247		B	CAPACITOR		C1026	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
248		B	CAPACITOR		C1027	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
249		B	CAPACITOR		C1028	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
250		B	CAPACITOR		C1029	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
251		B	CAPACITOR		C1030	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
252		B	CAPACITOR		C1031	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
253		B	CAPACITOR		C1032	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
254		B	CAPACITOR		C1033	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
255		B	CAPACITOR		C1034	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
256		B	CAPACITOR		C1038	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
257		B	CAPACITOR		C1039	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
258		B	CAPACITOR		C1040	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
259		B	CAPACITOR		C1042	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
260		B	CAPACITOR		C1045	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
261		B	CAPACITOR		C1046	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
262		B	CAPACITOR		C1047	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
263		B	CAPACITOR		C1048	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
264		B	CAPACITOR		C1049	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
265		B	CAPACITOR		C1050	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
266		B	CAPACITOR		C1051	1-126-390-11	ELECT CHIP 22UF 20.00% 6.3V		
267		B	CAPACITOR		C1052	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
268		B	CAPACITOR		C1053	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
269		B	CAPACITOR		C1054	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
270		B	CAPACITOR		C1055	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
271		B	CAPACITOR		C1058	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
272		B	CAPACITOR		C1059	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
273		B	CAPACITOR		C1060	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
274		B	CAPACITOR		C1061	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
275		B	CAPACITOR		C1062	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
276		B	CAPACITOR		C1063	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
277		B	CAPACITOR		C1064	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
278		B	CAPACITOR		C1065	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
279		B	CAPACITOR		C5000	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
280		B	CAPACITOR		C5001	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
281		B	CAPACITOR		C5003	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
282		B	CAPACITOR		C5004	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
283		B	CAPACITOR		C5005	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
284		B	CAPACITOR		C5006	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
285		B	CAPACITOR		C5007	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
286		B	CAPACITOR		C5009	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
287		B	CAPACITOR		C5010	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
288		B	CAPACITOR		C5012	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
289		B	CAPACITOR		C5013	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
290		B	CAPACITOR		C5014	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
291		B	CAPACITOR		C5015	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
292		B	CAPACITOR		C5017	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
293		B	CAPACITOR		C5018	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
294		B	CAPACITOR		C5019	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
295		B	CAPACITOR		C5020	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
296		B	CAPACITOR		C5021	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
297		B	CAPACITOR		C5022	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
298		B	CAPACITOR		C5024	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
299		B	CAPACITOR		C5026	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
300		B	CAPACITOR		C5027	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
301		B	CAPACITOR		C5028	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
302		B	CAPACITOR		C5029	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
303		B	CAPACITOR		C5030	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
304		B	CAPACITOR		C5031	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
305		B	CAPACITOR		C5032	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
306		B	CAPACITOR		C5033	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
307		B	CAPACITOR		C5034	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
308		B	CAPACITOR		C5035	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
309		B	CAPACITOR		C5036	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
310		B	CAPACITOR		C5037	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
311		B	CAPACITOR		C5038	1-162-918-11	CERAMIC CHIP 18PF 5.00% 50V		
312		B	CAPACITOR		C5039	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
313		B	CAPACITOR		C5040	1-124-779-00	ELECT CHIP 10UF 20.00% 16V		
314		B	CAPACITOR		C5041	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
315		B	CAPACITOR		C5042	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
316		B	CAPACITOR		C5043	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
317		B	CAPACITOR		C5044	1-162-917-11	CERAMIC CHIP 15PF 5.00% 50V		
318		B	CAPACITOR		C5045	1-162-966-11	CERAMIC CHIP 0.0022UF 10.00% 50V		
319		B	CAPACITOR		C5046	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
320		B	CAPACITOR		C5047	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
321		B	CAPACITOR		C5048	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
322		B	CAPACITOR		C5049	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
323		B	CAPACITOR		C5050	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
324		B	CAPACITOR		C5051	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
325		B	CAPACITOR		C5052	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
326		B	CAPACITOR		C5053	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
327		B	CAPACITOR		C5054	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
328		B	CAPACITOR		C5055	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
329		B	CAPACITOR		C5056	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
330		B	CAPACITOR		C5057	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
331		B	CAPACITOR		C5058	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
332		B	CAPACITOR		C5059	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
333		B	CAPACITOR		C5060	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
334		B	CAPACITOR		C5061	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
335		B	CAPACITOR		C5062	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
336		B	CAPACITOR		C5063	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
337		B	CAPACITOR		C5064	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
338		B	CAPACITOR		C5065	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
339		B	CAPACITOR		C5066	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
340		B	CAPACITOR		C5067	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
341		B	CAPACITOR		C5068	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
342		B	CAPACITOR		C5069	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
343		B	CAPACITOR		C5070	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
344		B	CAPACITOR		C5071	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
345		B	CAPACITOR		C5072	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
346		B	CAPACITOR		C5073	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
347		B	CAPACITOR		C5074	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
348		B	CAPACITOR		C5075	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
349		B	CAPACITOR		C5076	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
350		B	CAPACITOR		C5077	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
351		B	CAPACITOR		C5078	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
352		B	CAPACITOR		C5079	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
353		B	CAPACITOR		C5080	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V		
354		B	CAPACITOR		C5081	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
355		B	CAPACITOR		C5082	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
356		B	CAPACITOR		C5083	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
357		B	CAPACITOR		C5084	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
358		B	CAPACITOR		C5085	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
359		B	CAPACITOR		C5086	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
360		B	CAPACITOR		C5087	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
361		B	CAPACITOR		C5088	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
362		B	CAPACITOR		C5089	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
363		B	CAPACITOR		C5090	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
364		B	CAPACITOR		C5091	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
365		B	CAPACITOR		C5092	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
366		B	CAPACITOR		C5093	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
367		B	CAPACITOR		C5094	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
368		B	CAPACITOR		C5095	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
369		B	CAPACITOR		C5096	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
370		B	CAPACITOR		C5097	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
371		B	CAPACITOR		C5100	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
372		B	CAPACITOR		C5101	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
373		B	CAPACITOR		C5102	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
374		B	CAPACITOR		C5103	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
375		B	CAPACITOR		C5104	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
376		B	CAPACITOR		C5105	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
377		B	CAPACITOR		C5106	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
378		B	CAPACITOR		C5107	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
379		B	CAPACITOR		C5108	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
380		B	CAPACITOR		C5109	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
381		B	CAPACITOR		C5110	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
382		B	CAPACITOR		C5111	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
383		B	CAPACITOR		C5112	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
384		B	CAPACITOR		C5113	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
385		B	CAPACITOR		C5114	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
386		B	CAPACITOR		C5115	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
387		B	CAPACITOR		C5116	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
388		B	CAPACITOR		C5117	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
389		B	CAPACITOR		C5404	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
390		B	CAPACITOR		C5500	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
391		B	CAPACITOR		C5501	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
392		B	CAPACITOR		C5502	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
393		B	CAPACITOR		C5503	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
394		B	CAPACITOR		C5504	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
395		B	CAPACITOR		C5505	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
396		B	CAPACITOR		C5506	1-126-398-11	ELECT CHIP 4.7UF 20.00% 35V		
397		B	CAPACITOR		C5507	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
398		B	CAPACITOR		C5508	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
399		B	CAPACITOR		C5509	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
400		B	CAPACITOR		C5510	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
401		B	CAPACITOR		C5511	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
402		B	CAPACITOR		C5512	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
403		B	CAPACITOR		C5513	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
404		B	CAPACITOR		C5514	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
405		B	CAPACITOR		C5515	1-162-968-11	CERAMIC CHIP 0.0047UF 10.00% 50V		
406		B	CAPACITOR		C5516	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
407		B	CAPACITOR		C5524	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
408		B	CAPACITOR		C5525	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V		
409		B	CAPACITOR		C5526	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
410		B	CAPACITOR		C5528	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
411		B	CAPACITOR		C5529	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
412		B	CAPACITOR		C5700	1-127-573-11	CERAMIC CHIP 1UF 10% 16V		
413		B	CAPACITOR		C5701	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
414		B	CAPACITOR		C5702	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
415		B	CAPACITOR		C5703	1-127-738-91	CERAMIC CHIP 4.7UF 10% 25V		
416		B	CAPACITOR		C5704	1-127-738-91	CERAMIC CHIP 4.7UF 10% 25V		
417		B	CAPACITOR		C5705	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
418		B	CAPACITOR		C5706	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
419		B	CAPACITOR		C5707	1-135-372-11	ELECT 470UF 20% 10V		
420		B	CAPACITOR		C5709	1-135-372-11	ELECT 470UF 20% 10V		
421		B	CAPACITOR		C5720	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
422		B	CAPACITOR		C5721	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
423		B	CAPACITOR		C5722	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
424		B	CAPACITOR		C5723	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
425		B	CAPACITOR		C5724	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
426		B	CAPACITOR		C5725	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
427		B	CAPACITOR		C5726	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
428		B	CAPACITOR		C5727	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
429		B	CAPACITOR		C5728	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
430		B	CAPACITOR		C5729	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
431		B	CAPACITOR		C5730	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
432		B	CAPACITOR		C5731	1-126-392-11	ELECT CHIP 100UF 20.00% 6.3V		
433		B	CAPACITOR		C5740	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
434		B	CAPACITOR		C5741	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
435		B	CAPACITOR		C5742	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
436		B	CAPACITOR		C5743	1-128-536-11	ELECT CHIP 100UF 20.00% 25V		
437		B	CAPACITOR		C7400	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
438		B	CAPACITOR		C7401	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
439		B	CAPACITOR		C7402	1-127-738-91	CERAMIC CHIP 4.7UF 10% 25V		
440		B	CAPACITOR		C7403	1-127-738-91	CERAMIC CHIP 4.7UF 10% 25V		
441		B	CAPACITOR		C7404	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
442		B	CAPACITOR		C7405	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
443		B	CAPACITOR		C7406	1-127-738-91	CERAMIC CHIP 4.7UF 10% 25V		
444		B	CAPACITOR		C7407	1-127-738-91	CERAMIC CHIP 4.7UF 10% 25V		



No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
445		B	CAPACITOR		C7408	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
446		B	CAPACITOR		C7409	1-100-591-91	CERAMIC CHIP 1UF 10% 25V		
447		B	CAPACITOR		C7411	1-126-391-11	ELECT CHIP 47UF 20.00% 6.3V		
448		B	CAPACITOR		C7412	1-165-908-11	CERAMIC CHIP 1UF 10% 10V		
449		B	CAPACITOR		C7413	1-162-970-11	CERAMIC CHIP 0.01UF 10.00% 25V		
450		B	CAPACITOR		C7414	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
451		B	CAPACITOR		C7416	1-110-563-11	CERAMIC CHIP 0.068UF 10.00% 16V		
452		B	CAPACITOR		C7417	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
453		B	CAPACITOR		C7418	1-126-394-11	ELECT CHIP 10UF 20.00% 16V		
454		B	CAPACITOR		C7422	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
455		B	CAPACITOR		C7423	1-127-738-91	CERAMIC CHIP 4.7UF 10% 25V		
456		B	CAPACITOR		C7424	1-100-566-91	CERAMIC CHIP 0.1UF 10.00% 25V		
457		B	CAPACITOR		C7427	1-162-960-11	CERAMIC CHIP 220PF 10.00% 50V		
458		B	CAPACITOR		C7428	1-162-927-11	CERAMIC CHIP 100PF 5.00% 50V		
459		B	CAPACITOR		C7434	1-162-919-11	CERAMIC CHIP 22PF 5.00% 50V		
460		B	CONNECTOR		CN1001	1-778-652-11	CONNECTOR, FFC (ZIF) 50P		
461		B	CONNECTOR		CN1003	1-816-296-21	PIN, CONNECTOR (PC BOARD) 9P		
462		B	CONNECTOR		CN1004	1-779-936-21	CONNECTOR, FFC/FPC 18P		
463		B	CONNECTOR		CN1006	1-779-772-11	CONNECTOR 13P		
464		B	CONNECTOR		CN1007	1-785-946-21	CONNECTOR 3P		
465		B	CONNECTOR		CN1008	1-784-254-11	CONNECTOR 10P		
466		B	CONNECTOR		CN5400	1-794-930-21	CONNECTOR, D SUB		
467		B	DIODE		D1002	8-719-077-59	DIODE 1PS302		
468		B	DIODE		D1003	8-719-081-97	DIODE MMDL914T1		
469		B	DIODE		D1004	8-719-024-77	DIODE HN1D03FU-TE85L		
470		B	DIODE		D1005	8-719-081-97	DIODE MMDL914T1		
471		B	DIODE		D1008	8-719-081-97	DIODE MMDL914T1		
472		B	DIODE		D1009	8-719-081-97	DIODE MMDL914T1		
473		B	DIODE		D1010	8-719-036-94	DIODE RD5.6SB-T1		
474		B	DIODE		D1011	8-719-036-94	DIODE RD5.6SB-T1		
475		B	DIODE		D5400	8-719-073-39	DIODE HZU5.6GTRF		
476		B	DIODE		D5401	8-719-073-39	DIODE HZU5.6GTRF		
477		B	DIODE		D5402	8-719-073-39	DIODE HZU5.6GTRF		
478		B	DIODE		D5405	8-719-801-78	DIODE 1SS184		
479		B	DIODE		D5700	8-719-081-97	DIODE MMDL914T1		
480		B	DIODE		D5701	8-719-073-34	DIODE EC21QS03L-TE12L		
481		B	DIODE		D5702	8-719-081-97	DIODE MMDL914T1		
482		B	DIODE		D5703	8-719-073-34	DIODE EC21QS03L-TE12L		
483		B	DIODE		D5704	8-719-056-83	DIODE UDZ-TE-17-6.8B		
484		B	DIODE		D5705	8-719-056-83	DIODE UDZ-TE-17-6.8B		
485		B	DIODE		D7400	8-719-421-67	DIODE MA132WK		
486		B	DIODE		D7401	8-719-421-67	DIODE MA132WK		
487		B	FUSE	△	F5700	1-576-770-21	FUSE 2A 125V		
488		B	FERRITE BEAD		FB1006	1-414-445-11	FERRITE 0UH		
489		B	FERRITE BEAD		FB5400	1-469-100-21	FERRITE 0UH		
490		B	FERRITE BEAD		FB5401	1-469-100-21	FERRITE 0UH		
491		B	FERRITE BEAD		FB5402	1-469-100-21	FERRITE 0UH		
492		B	FERRITE BEAD		FB5403	1-400-141-22	FERRITE 0UH		
493		B	FERRITE BEAD		FB5500	1-400-179-21	INDUCTOR 0UH		
494		B	FERRITE BEAD		FB5501	1-400-179-21	INDUCTOR 0UH		
495		B	FERRITE BEAD		FB7400	1-414-760-21	FERRITE 0UH		
496		B	FILTER		FL1001	1-234-177-21	FERRITE 0UH		
497		B	FILTER		FL5000	1-234-177-21	FERRITE 0UH		
498		B	FILTER		FL5001	1-234-177-21	FERRITE 0UH		
499		B	FILTER		FL5002	1-234-177-21	FERRITE 0UH		
500		B	FILTER		FL5003	1-234-177-21	FERRITE 0UH		
501		B	FILTER		FL5004	1-234-177-21	FERRITE 0UH		
502		B	FILTER		FL5005	1-234-177-21	FERRITE 0UH		
503		B	FILTER		FL5006	1-234-177-21	FERRITE 0UH		
504		B	FILTER		FL5007	1-234-177-21	FERRITE 0UH		
505		B	FILTER		FL5500	1-234-177-21	FERRITE 0UH		
506		B	FILTER		FL5501	1-234-177-21	FERRITE 0UH		
507		B	IC		IC1001	6-805-311-01	IC HD64F2378-12681-01		
508		B	IC		IC1002	6-704-117-01	IC S-1111B33MC-NYSTFG		
509		B	IC		IC1003	8-759-592-49	IC TC7SZ125FU(TE85R)		
510		B	IC		IC1004	6-703-225-01	IC S-80928CNMC-G8YT2G		
511		B	IC		IC1005	6-704-067-01	IC M24128-BWMN6T(A)		
512		B	IC		IC1007	8-759-476-80	IC LM75CIMX-3		
513		B	IC		IC1008	8-759-549-03	IC SN74LV132APWR		
514		B	IC		IC1009	6-700-108-01	IC RV5C387A-E2-FB		
515		B	IC		IC5000	6-707-561-01	IC SVPEX-S		
516		B	IC		IC5400	6-704-600-01	IC M24C02-WMN6T(B)		
517		B	IC		IC5500	6-707-822-01	IC EM6A9320BI-5MG		
518		B	IC		IC5700	6-704-407-01	IC PQ1CZ41H2ZPH		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
519		B	IC		IC5701	6-704-407-01	IC PQ1CZ41H2ZPH		
520		B	IC		IC5720	8-759-832-05	IC BA18BC0FP-E2		
521		B	IC		IC5721	8-759-832-05	IC BA18BC0FP-E2		
522		B	IC		IC5722	6-700-394-01	IC BA25BC0FP-E2		
523		B	IC		IC5740	8-759-533-85	IC L88M05T-FA-TL		
524		B	IC		IC7400	8-759-679-54	IC SN74LVC14APWR		
525		B	IC		IC7401	8-759-646-02	IC M52347FP-TE		
526		B	COIL		L1001	1-400-180-21	INDUCTOR 0UH		
527		B	COIL		L1002	1-400-180-21	INDUCTOR 0UH		
528		B	COIL		L1003	1-400-180-21	INDUCTOR 0UH		
529		B	COIL		L1007	1-400-180-21	INDUCTOR 0UH		
530		B	COIL		L1009	1-400-180-21	INDUCTOR 0UH		
531		B	COIL		L1010	1-400-179-21	INDUCTOR 0UH		
532		B	COIL		L5000	1-414-394-11	INDUCTOR 2.2UH		
533		B	COIL		L5001	1-414-394-11	INDUCTOR 2.2UH		
534		B	COIL		L5002	1-414-394-11	INDUCTOR 2.2UH		
535		B	COIL		L5003	1-414-394-11	INDUCTOR 2.2UH		
536		B	COIL		L5004	1-400-179-21	INDUCTOR 0UH		
537		B	COIL		L5005	1-400-179-21	INDUCTOR 0UH		
538		B	COIL		L5006	1-216-801-11	METAL CHIP 22 5% 1/10W		
539		B	COIL		L5007	1-216-801-11	METAL CHIP 22 5% 1/10W		
540		B	COIL		L5008	1-456-984-11	INDUCTOR 0UH		
541		B	COIL		L5009	1-456-984-11	INDUCTOR 0UH		
542		B	COIL		L5010	1-400-179-21	INDUCTOR 0UH		
543		B	COIL		L5011	1-400-180-21	INDUCTOR 0UH		
544		B	COIL		L5012	1-456-984-11	INDUCTOR 0UH		
545		B	COIL		L5013	1-456-984-11	INDUCTOR 0UH		
546		B	COIL		L5014	1-456-984-11	INDUCTOR 0UH		
547		B	COIL		L5015	1-400-179-21	INDUCTOR 0UH		
548		B	COIL		L5700	1-409-529-41	INDUCTOR 10UH		
549		B	COIL		L5701	1-456-786-21	INDUCTOR 47UH		
550		B	COIL		L5702	1-456-786-21	INDUCTOR 47UH		
551		B	COIL		L5729	1-400-784-21	INDUCTOR 4.7UH		
552		B	IC LINK	△	PS5400	1-576-122-21	IC LINK 0.4A 72V		
553		B	TRANSISTOR		Q1001	8-729-045-62	TRANSISTOR 2SK2158-T2B		
554		B	TRANSISTOR		Q1002	8-729-045-62	TRANSISTOR 2SK2158-T2B		
555		B	TRANSISTOR		Q1003	8-729-045-62	TRANSISTOR 2SK2158-T2B		
556		B	TRANSISTOR		Q1004	8-729-045-62	TRANSISTOR 2SK2158-T2B		
557		B	TRANSISTOR		Q1009	8-729-013-28	TRANSISTOR HN1B01FU-TE85R		
558		B	TRANSISTOR		Q1010	8-729-043-27	TRANSISTOR PDTC114EK-115		
559		B	TRANSISTOR		Q1015	8-729-907-00	TRANSISTOR DTC114EU		
560		B	TRANSISTOR		Q5700	8-729-046-04	TRANSISTOR FDS6690A		
561		B	TRANSISTOR		Q7401	8-729-927-99	TRANSISTOR 2SC4617R		
562		B	TRANSISTOR		Q7402	8-729-927-99	TRANSISTOR 2SC4617R		
563		B	TRANSISTOR		Q7410	8-729-928-19	TRANSISTOR 2SA1774R		
564		B	RESISTOR		R1011	1-216-864-11	SHORT CHIP 0		
565		B	RESISTOR		R1016	1-216-864-11	SHORT CHIP 0		
566		B	RESISTOR		R1019	1-216-864-11	SHORT CHIP 0		
567		B	RESISTOR		R1020	1-216-864-11	SHORT CHIP 0		
568		B	RESISTOR		R1024	1-218-990-11	SHORT CHIP 0		
569		B	RESISTOR		R1026	1-218-990-11	SHORT CHIP 0		
570		B	RESISTOR		R1027	1-218-990-11	SHORT CHIP 0		
571		B	RESISTOR		R1029	1-218-990-11	SHORT CHIP 0		
572		B	RESISTOR		R1030	1-216-864-11	SHORT CHIP 0		
573		B	RESISTOR		R1031	1-218-990-11	SHORT CHIP 0		
574		B	RESISTOR		R1032	1-216-864-11	SHORT CHIP 0		
575		B	RESISTOR		R1033	1-218-990-11	SHORT CHIP 0		
576		B	RESISTOR		R1034	1-218-990-11	SHORT CHIP 0		
577		B	RESISTOR		R1035	1-218-990-11	SHORT CHIP 0		
578		B	RESISTOR		R1036	1-218-990-11	SHORT CHIP 0		
579		B	RESISTOR		R1037	1-218-990-11	SHORT CHIP 0		
580		B	RESISTOR		R1038	1-218-990-11	SHORT CHIP 0		
581		B	RESISTOR		R1040	1-216-864-11	SHORT CHIP 0		
582		B	RESISTOR		R1041	1-218-990-11	SHORT CHIP 0		
583		B	RESISTOR		R1042	1-216-864-11	SHORT CHIP 0		
584		B	RESISTOR		R1043	1-216-864-11	SHORT CHIP 0		
585		B	RESISTOR		R1045	1-218-990-11	SHORT CHIP 0		
586		B	RESISTOR		R1046	1-216-864-11	SHORT CHIP 0		
587		B	RESISTOR		R1047	1-216-864-11	SHORT CHIP 0		
588		B	RESISTOR		R1049	1-218-990-11	SHORT CHIP 0		
589		B	RESISTOR		R1050	1-218-990-11	SHORT CHIP 0		
590		B	RESISTOR		R1051	1-218-990-11	SHORT CHIP 0		
591		B	RESISTOR		R1052	1-218-990-11	SHORT CHIP 0		
592		B	RESISTOR		R1054	1-218-990-11	SHORT CHIP 0		

No.	#	Board	Type	$\Delta/\ast$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
593		B	RESISTOR		R1056	1-216-864-11	SHORT CHIP 0		
594		B	RESISTOR		R1057	1-218-990-11	SHORT CHIP 0		
595		B	RESISTOR		R1058	1-216-864-11	SHORT CHIP 0		
596		B	RESISTOR		R1059	1-218-990-11	SHORT CHIP 0		
597		B	RESISTOR		R1060	1-216-864-11	SHORT CHIP 0		
598		B	RESISTOR		R1061	1-218-990-11	SHORT CHIP 0		
599		B	RESISTOR		R1062	1-218-990-11	SHORT CHIP 0		
600		B	RESISTOR		R1063	1-216-864-11	SHORT CHIP 0		
601		B	RESISTOR		R1064	1-218-990-11	SHORT CHIP 0		
602		B	RESISTOR		R1065	1-218-990-11	SHORT CHIP 0		
603		B	RESISTOR		R1066	1-218-990-11	SHORT CHIP 0		
604		B	RESISTOR		R1067	1-216-864-11	SHORT CHIP 0		
605		B	RESISTOR		R1068	1-216-864-11	SHORT CHIP 0		
606		B	RESISTOR		R1069	1-216-864-11	SHORT CHIP 0		
607		B	RESISTOR		R1070	1-216-864-11	SHORT CHIP 0		
608		B	RESISTOR		R1071	1-216-864-11	SHORT CHIP 0		
609		B	RESISTOR		R1073	1-216-864-11	SHORT CHIP 0		
610		B	RESISTOR		R1077	1-216-864-11	SHORT CHIP 0		
611		B	RESISTOR		R1078	1-216-864-11	SHORT CHIP 0		
612		B	RESISTOR		R1083	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
613		B	RESISTOR		R1084	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
614		B	RESISTOR		R1085	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
615		B	RESISTOR		R1086	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
616		B	RESISTOR		R1088	1-216-864-11	SHORT CHIP 0		
617		B	RESISTOR		R1103	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
618		B	RESISTOR		R1104	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
619		B	RESISTOR		R1105	1-218-971-11	RES-CHIP 33K 5% 1/16W		
620		B	RESISTOR		R1107	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
621		B	RESISTOR		R1109	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
622		B	RESISTOR		R1110	1-218-887-11	METAL CHIP 47K 0.5% 1/10W		
623		B	RESISTOR		R1111	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
624		B	RESISTOR		R1112	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
625		B	RESISTOR		R1116	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
626		B	RESISTOR		R1117	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
627		B	RESISTOR		R1120	1-218-965-11	RES-CHIP 10K 5% 1/16W		
628		B	RESISTOR		R1121	1-218-965-11	RES-CHIP 10K 5% 1/16W		
629		B	RESISTOR		R1123	1-218-965-11	RES-CHIP 10K 5% 1/16W		
630		B	RESISTOR		R1124	1-218-965-11	RES-CHIP 10K 5% 1/16W		
631		B	RESISTOR		R1125	1-218-965-11	RES-CHIP 10K 5% 1/16W		
632		B	RESISTOR		R1126	1-218-965-11	RES-CHIP 10K 5% 1/16W		
633		B	RESISTOR		R1128	1-218-965-11	RES-CHIP 10K 5% 1/16W		
634		B	RESISTOR		R1129	1-218-965-11	RES-CHIP 10K 5% 1/16W		
635		B	RESISTOR		R1130	1-208-886-81	METAL CHIP 910 0.5% 1/16W		
636		B	RESISTOR		R1131	1-218-965-11	RES-CHIP 10K 5% 1/16W		
637		B	RESISTOR		R1133	1-218-941-81	RES-CHIP 100 5% 1/16W		
638		B	RESISTOR		R1136	1-218-965-11	RES-CHIP 10K 5% 1/16W		
639		B	RESISTOR		R1137	1-218-965-11	RES-CHIP 10K 5% 1/16W		
640		B	RESISTOR		R1138	1-218-941-81	RES-CHIP 100 5% 1/16W		
641		B	RESISTOR		R1139	1-218-990-11	SHORT CHIP 0		
642		B	RESISTOR		R1140	1-218-990-11	SHORT CHIP 0		
643		B	RESISTOR		R1141	1-218-941-81	RES-CHIP 100 5% 1/16W		
644		B	RESISTOR		R1142	1-218-965-11	RES-CHIP 10K 5% 1/16W		
645		B	RESISTOR		R1143	1-218-945-11	RES-CHIP 220 5% 1/16W		
646		B	RESISTOR		R1144	1-218-965-11	RES-CHIP 10K 5% 1/16W		
647		B	RESISTOR		R1145	1-218-965-11	RES-CHIP 10K 5% 1/16W		
648		B	RESISTOR		R1146	1-218-965-11	RES-CHIP 10K 5% 1/16W		
649		B	RESISTOR		R1147	1-218-941-81	RES-CHIP 100 5% 1/16W		
650		B	RESISTOR		R1148	1-218-929-11	RES-CHIP 10 5% 1/16W		
651		B	RESISTOR		R1149	1-218-990-11	SHORT CHIP 0		
652		B	RESISTOR		R1150	1-218-965-11	RES-CHIP 10K 5% 1/16W		
653		B	RESISTOR		R1151	1-218-990-11	SHORT CHIP 0		
654		B	RESISTOR		R1152	1-218-941-81	RES-CHIP 100 5% 1/16W		
655		B	RESISTOR		R1153	1-218-965-11	RES-CHIP 10K 5% 1/16W		
656		B	RESISTOR		R1154	1-218-990-11	SHORT CHIP 0		
657		B	RESISTOR		R1155	1-218-965-11	RES-CHIP 10K 5% 1/16W		
658		B	RESISTOR		R1156	1-218-990-11	SHORT CHIP 0		
659		B	RESISTOR		R1157	1-218-990-11	SHORT CHIP 0		
660		B	RESISTOR		R1158	1-218-990-11	SHORT CHIP 0		
661		B	RESISTOR		R1159	1-218-990-11	SHORT CHIP 0		
662		B	RESISTOR		R1160	1-218-973-11	RES-CHIP 47K 5% 1/16W		
663		B	RESISTOR		R1161	1-218-990-11	SHORT CHIP 0		
664		B	RESISTOR		R1163	1-218-941-81	RES-CHIP 100 5% 1/16W		
665		B	RESISTOR		R1164	1-218-941-81	RES-CHIP 100 5% 1/16W		
666		B	RESISTOR		R1167	1-218-973-11	RES-CHIP 47K 5% 1/16W		

No.	#	Board	Type	$\Delta/\ast$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
667		B	RESISTOR		R1168	1-218-941-81	RES-CHIP 100 5% 1/16W		
668		B	RESISTOR		R1169	1-218-941-81	RES-CHIP 100 5% 1/16W		
669		B	RESISTOR		R1170	1-218-941-81	RES-CHIP 100 5% 1/16W		
670		B	RESISTOR		R1171	1-218-941-81	RES-CHIP 100 5% 1/16W		
671		B	RESISTOR		R1172	1-218-941-81	RES-CHIP 100 5% 1/16W		
672		B	RESISTOR		R1173	1-218-965-11	RES-CHIP 10K 5% 1/16W		
673		B	RESISTOR		R1174	1-218-941-81	RES-CHIP 100 5% 1/16W		
674		B	RESISTOR		R1175	1-218-990-11	SHORT CHIP 0		
675		B	RESISTOR		R1176	1-218-971-11	RES-CHIP 33K 5% 1/16W		
676		B	RESISTOR		R1177	1-218-990-11	SHORT CHIP 0		
677		B	RESISTOR		R1178	1-218-965-11	RES-CHIP 10K 5% 1/16W		
678		B	RESISTOR		R1179	1-218-965-11	RES-CHIP 10K 5% 1/16W		
679		B	RESISTOR		R1180	1-218-941-81	RES-CHIP 100 5% 1/16W		
680		B	RESISTOR		R1182	1-218-965-11	RES-CHIP 10K 5% 1/16W		
681		B	RESISTOR		R1183	1-218-941-81	RES-CHIP 100 5% 1/16W		
682		B	RESISTOR		R1184	1-218-941-81	RES-CHIP 100 5% 1/16W		
683		B	RESISTOR		R1185	1-218-941-81	RES-CHIP 100 5% 1/16W		
684		B	RESISTOR		R1186	1-218-941-81	RES-CHIP 100 5% 1/16W		
685		B	RESISTOR		R1187	1-218-941-81	RES-CHIP 100 5% 1/16W		
686		B	RESISTOR		R1188	1-218-941-81	RES-CHIP 100 5% 1/16W		
687		B	RESISTOR		R1189	1-218-941-81	RES-CHIP 100 5% 1/16W		
688		B	RESISTOR		R1190	1-218-941-81	RES-CHIP 100 5% 1/16W		
689		B	RESISTOR		R1193	1-218-965-11	RES-CHIP 10K 5% 1/16W		
690		B	RESISTOR		R1194	1-218-965-11	RES-CHIP 10K 5% 1/16W		
691		B	RESISTOR		R1195	1-218-965-11	RES-CHIP 10K 5% 1/16W		
692		B	RESISTOR		R1196	1-218-941-81	RES-CHIP 100 5% 1/16W		
693		B	RESISTOR		R1198	1-218-965-11	RES-CHIP 10K 5% 1/16W		
694		B	RESISTOR		R1199	1-218-941-81	RES-CHIP 100 5% 1/16W		
695		B	RESISTOR		R1200	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
696		B	RESISTOR		R1201	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
697		B	RESISTOR		R1203	1-218-959-11	RES-CHIP 3.3K 5% 1/16W		
698		B	RESISTOR		R1205	1-218-961-11	RES-CHIP 4.7K 5% 1/16W		
699		B	RESISTOR		R1208	1-218-945-11	RES-CHIP 220 5% 1/16W		
700		B	RESISTOR		R1209	1-218-965-11	RES-CHIP 10K 5% 1/16W		
701		B	RESISTOR		R1210	1-218-937-11	RES-CHIP 47 5% 1/16W		
702		B	RESISTOR		R1211	1-218-965-11	RES-CHIP 10K 5% 1/16W		
703		B	RESISTOR		R1212	1-218-965-11	RES-CHIP 10K 5% 1/16W		
704		B	RESISTOR		R1213	1-218-937-11	RES-CHIP 47 5% 1/16W		
705		B	RESISTOR		R1214	1-218-965-11	RES-CHIP 10K 5% 1/16W		
706		B	RESISTOR		R1215	1-216-813-11	METAL CHIP 220 5% 1/10W		
707		B	RESISTOR		R1217	1-216-864-11	SHORT CHIP 0		
708		B	RESISTOR		R1218	1-216-864-11	SHORT CHIP 0		
709		B	RESISTOR		R1219	1-216-864-11	SHORT CHIP 0		
710		B	RESISTOR		R1220	1-216-864-11	SHORT CHIP 0		
711		B	RESISTOR		R1221	1-216-864-11	SHORT CHIP 0		
712		B	RESISTOR		R1222	1-216-864-11	SHORT CHIP 0		
713		B	RESISTOR		R1223	1-216-864-11	SHORT CHIP 0		
714		B	RESISTOR		R1224	1-216-864-11	SHORT CHIP 0		
715		B	RESISTOR		R1225	1-216-864-11	SHORT CHIP 0		
716		B	RESISTOR		R1228	1-216-864-11	SHORT CHIP 0		
717		B	RESISTOR		R1229	1-216-849-11	METAL CHIP 220K 5% 1/10W		
718		B	RESISTOR		R1230	1-218-941-81	RES-CHIP 100 5% 1/16W		
719		B	RESISTOR		R1231	1-216-809-11	METAL CHIP 100 5% 1/10W		
720		B	RESISTOR		R1232	1-216-864-11	SHORT CHIP 0		
721		B	RESISTOR		R1233	1-218-965-11	RES-CHIP 10K 5% 1/16W		
722		B	RESISTOR		R1234	1-216-864-11	SHORT CHIP 0		
723		B	RESISTOR		R1235	1-218-990-11	SHORT CHIP 0		
724		B	RESISTOR		R1236	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
725		B	RESISTOR		R1237	1-218-965-11	RES-CHIP 10K 5% 1/16W		
726		B	RESISTOR		R1238	1-216-841-11	METAL CHIP 47K 5% 1/10W		
727		B	RESISTOR		R1239	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
728		B	RESISTOR		R1240	1-218-867-11	METAL CHIP 6.8K 0.5% 1/10W		
729		B	RESISTOR		R1244	1-218-965-11	RES-CHIP 10K 5% 1/16W		
730		B	RESISTOR		R1245	1-218-990-11	SHORT CHIP 0		
731		B	RESISTOR		R1246	1-218-990-11	SHORT CHIP 0		
732		B	RESISTOR		R1247	1-218-965-11	RES-CHIP 10K 5% 1/16W		
733		B	RESISTOR		R1248	1-218-965-11	RES-CHIP 10K 5% 1/16W		
734		B	RESISTOR		R1249	1-218-965-11	RES-CHIP 10K 5% 1/16W		
735		B	RESISTOR		R5000	1-216-864-11	SHORT CHIP 0		
736		B	RESISTOR		R5001	1-216-864-11	SHORT CHIP 0		
737		B	RESISTOR		R5002	1-216-864-11	SHORT CHIP 0		
738		B	RESISTOR		R5003	1-216-821-11	METAL CHIP 1K 5% 1/10W		
739		B	RESISTOR		R5005	1-216-864-11	SHORT CHIP 0		
740		B	RESISTOR		R5009	1-216-295-91	SHORT CHIP 0		

No.	#	Board	Type	$\Delta/\ast$	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
741		B	RESISTOR		R5010	1-216-821-11	METAL CHIP 1K 5% 1/10W		
742		B	RESISTOR		R5012	1-216-829-11	METAL CHIP 4.7K 5% 1/10W		
743		B	RESISTOR		R5014	1-218-990-11	SHORT CHIP 0		
744		B	RESISTOR		R5015	1-216-864-11	SHORT CHIP 0		
745		B	RESISTOR		R5016	1-216-864-11	SHORT CHIP 0		
746		B	RESISTOR		R5017	1-216-821-11	METAL CHIP 1K 5% 1/10W		
747		B	RESISTOR		R5022	1-216-864-11	SHORT CHIP 0		
748		B	RESISTOR		R5023	1-216-864-11	SHORT CHIP 0		
749		B	RESISTOR		R5032	1-218-933-11	RES-CHIP 22 5% 1/16W		
750		B	RESISTOR		R5033	1-218-933-11	RES-CHIP 22 5% 1/16W		
751		B	RESISTOR		R5040	1-216-864-11	SHORT CHIP 0		
752		B	RESISTOR		R5043	1-216-841-11	METAL CHIP 47K 5% 1/10W		
753		B	RESISTOR		R5050	1-218-990-11	SHORT CHIP 0		
754		B	RESISTOR		R5051	1-218-990-11	SHORT CHIP 0		
755		B	RESISTOR		R5052	1-218-990-11	SHORT CHIP 0		
756		B	RESISTOR		R5053	1-218-990-11	SHORT CHIP 0		
757		B	RESISTOR		R5054	1-218-990-11	SHORT CHIP 0		
758		B	RESISTOR		R5055	1-218-990-11	SHORT CHIP 0		
759		B	RESISTOR		R5056	1-218-990-11	SHORT CHIP 0		
760		B	RESISTOR		R5057	1-218-990-11	SHORT CHIP 0		
761		B	RESISTOR		R5059	1-218-990-11	SHORT CHIP 0		
762		B	RESISTOR		R5065	1-218-990-11	SHORT CHIP 0		
763		B	RESISTOR		R5068	1-218-990-11	SHORT CHIP 0		
764		B	RESISTOR		R5070	1-216-864-11	SHORT CHIP 0		
765		B	RESISTOR		R5071	1-216-864-11	SHORT CHIP 0		
766		B	RESISTOR		R5072	1-216-864-11	SHORT CHIP 0		
767		B	RESISTOR		R5400	1-216-805-11	METAL CHIP 47 5% 1/10W		
768		B	RESISTOR		R5404	1-216-805-11	METAL CHIP 47 5% 1/10W		
769		B	RESISTOR		R5409	1-216-833-11	METAL CHIP 10K 5% 1/10W		
770		B	RESISTOR		R5410	1-216-833-11	METAL CHIP 10K 5% 1/10W		
771		B	RESISTOR		R5411	1-216-805-11	METAL CHIP 47 5% 1/10W		
772		B	RESISTOR		R5412	1-216-805-11	METAL CHIP 47 5% 1/10W		
773		B	RESISTOR		R5413	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
774		B	RESISTOR		R5414	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
775		B	RESISTOR		R5417	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
776		B	RESISTOR		R5418	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
777		B	RESISTOR		R5419	1-216-821-11	METAL CHIP 1K 5% 1/10W		
778		B	RESISTOR		R5420	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
779		B	RESISTOR		R5421	1-218-827-11	METAL CHIP 150 0.5% 1/10W		
780		B	RESISTOR		R5422	1-216-845-11	METAL CHIP 100K 5% 1/10W		
781		B	RESISTOR		R5424	1-216-864-11	SHORT CHIP 0		
782		B	RESISTOR		R5425	1-216-864-11	SHORT CHIP 0		
783		B	RESISTOR		R5426	1-216-864-11	SHORT CHIP 0		
784		B	RESISTOR		R5427	1-216-864-11	SHORT CHIP 0		
785		B	RESISTOR		R5428	1-216-864-11	SHORT CHIP 0		
786		B	RESISTOR		R5429	1-216-295-91	SHORT CHIP 0		
787		B	RESISTOR		R5500	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
788		B	RESISTOR		R5501	1-218-847-11	METAL CHIP 1K 0.5% 1/10W		
789		B	RESISTOR		R5502	1-211-986-11	METAL CHIP 51 0.5% 1/10W		
790		B	RESISTOR		R5503	1-211-986-11	METAL CHIP 51 0.5% 1/10W		
791		B	RESISTOR		R5504	1-218-933-11	RES-CHIP 22 5% 1/16W		
792		B	RESISTOR		R5505	1-218-933-11	RES-CHIP 22 5% 1/16W		
793		B	RESISTOR		R5506	1-218-933-11	RES-CHIP 22 5% 1/16W		
794		B	RESISTOR		R5507	1-218-933-11	RES-CHIP 22 5% 1/16W		
795		B	RESISTOR		R5508	1-218-933-11	RES-CHIP 22 5% 1/16W		
796		B	RESISTOR		R5509	1-218-933-11	RES-CHIP 22 5% 1/16W		
797		B	RESISTOR		R5510	1-218-990-11	SHORT CHIP 0		
798		B	RESISTOR		R5511	1-218-990-11	SHORT CHIP 0		
799		B	RESISTOR		R5512	1-218-933-11	RES-CHIP 22 5% 1/16W		
800		B	RESISTOR		R5513	1-218-933-11	RES-CHIP 22 5% 1/16W		
801		B	RESISTOR		R5514	1-218-933-11	RES-CHIP 22 5% 1/16W		
802		B	RESISTOR		R5515	1-218-933-11	RES-CHIP 22 5% 1/16W		
803		B	RESISTOR		R5516	1-218-933-11	RES-CHIP 22 5% 1/16W		
804		B	RESISTOR		R5532	1-216-295-91	SHORT CHIP 0		
805		B	RESISTOR		R5533	1-216-295-91	SHORT CHIP 0		
806		B	RESISTOR		R5534	1-216-864-11	SHORT CHIP 0		
807		B	RESISTOR		R5536	1-216-296-11	SHORT CHIP 0		
808		B	RESISTOR		R5537	1-216-864-11	SHORT CHIP 0		
809		B	RESISTOR		R5700	1-216-821-11	METAL CHIP 1K 5% 1/10W		
810		B	RESISTOR		R5701	1-216-821-11	METAL CHIP 1K 5% 1/10W		
811		B	RESISTOR		R5702	1-216-821-11	METAL CHIP 1K 5% 1/10W		
812		B	RESISTOR		R5703	1-216-815-11	METAL CHIP 330 5% 1/10W		
813		B	RESISTOR		R5704	1-216-841-11	METAL CHIP 47K 5% 1/10W		
814		B	RESISTOR		R5707	1-216-841-11	METAL CHIP 47K 5% 1/10W		

No.	#	Board	Type	△/*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
815		B	RESISTOR		R5710	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
816		B	RESISTOR		R5711	1-218-853-11	METAL CHIP 1.8K 0.5% 1/10W		
817		B	RESISTOR		R5714	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
818		B	RESISTOR		R5715	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
819		B	RESISTOR		R5716	1-218-855-11	METAL CHIP 2.2K 0.5% 1/10W		
820		B	RESISTOR		R5717	1-216-295-91	SHORT CHIP 0		
821		B	RESISTOR		R5718	1-216-295-91	SHORT CHIP 0		
822		B	RESISTOR		R5722	1-216-295-91	SHORT CHIP 0		
823		B	RESISTOR		R5726	1-216-295-91	SHORT CHIP 0		
824		B	RESISTOR		R5727	1-216-295-91	SHORT CHIP 0		
825		B	RESISTOR		R5732	1-218-863-11	METAL CHIP 4.7K 0.5% 1/10W		
826		B	RESISTOR		R5742	1-216-295-91	SHORT CHIP 0		
827		B	RESISTOR		R5743	1-216-295-91	SHORT CHIP 0		
828		B	RESISTOR		R7400	1-208-713-11	METAL CHIP 18K 0.5% 1/16W		
829		B	RESISTOR		R7401	1-208-715-11	METAL CHIP 22K 0.5% 1/16W		
830		B	RESISTOR		R7402	1-218-949-11	RES-CHIP 470 5% 1/16W		
831		B	RESISTOR		R7403	1-208-715-11	METAL CHIP 22K 0.5% 1/16W		
832		B	RESISTOR		R7404	1-208-713-11	METAL CHIP 18K 0.5% 1/16W		
833		B	RESISTOR		R7407	1-218-949-11	RES-CHIP 470 5% 1/16W		
834		B	RESISTOR		R7410	1-218-933-11	RES-CHIP 22 5% 1/16W		
835		B	RESISTOR		R7411	1-218-933-11	RES-CHIP 22 5% 1/16W		
836		B	RESISTOR		R7413	1-218-949-11	RES-CHIP 470 5% 1/16W		
837		B	RESISTOR		R7417	1-218-973-11	RES-CHIP 47K 5% 1/16W		
838		B	RESISTOR		R7418	1-218-965-11	RES-CHIP 10K 5% 1/16W		
839		B	RESISTOR		R7420	1-218-955-11	RES-CHIP 1.5K 5% 1/16W		
840		B	RESISTOR		R7424	1-218-937-11	RES-CHIP 47 5% 1/16W		
841		B	RESISTOR		R7432	1-218-990-11	SHORT CHIP 0		
842		B	RESISTOR		R7433	1-218-953-11	RES-CHIP 1K 5% 1/16W		
843		B	RESISTOR		R7435	1-208-931-11	METAL CHIP 68K 0.5% 1/16W		
844		B	RESISTOR		R7436	1-218-953-11	RES-CHIP 1K 5% 1/16W		
845		B	RESISTOR		R7439	1-218-990-11	SHORT CHIP 0		
846		B	RESISTOR		R7440	1-218-990-11	SHORT CHIP 0		
847		B	RESISTOR		R7443	1-218-990-11	SHORT CHIP 0		
848		B	RESISTOR		R7444	1-218-990-11	SHORT CHIP 0		
849		B	RESISTOR		R7445	1-208-699-11	METAL CHIP 4.7K 0.5% 1/16W		
850		B	RESISTOR		R7446	1-218-965-11	RES-CHIP 10K 5% 1/16W		
851		B	RESISTOR		R7447	1-218-965-11	RES-CHIP 10K 5% 1/16W		
852		B	RESISTOR		R7448	1-218-990-11	SHORT CHIP 0		
853		B	RESISTOR		R7449	1-218-953-11	RES-CHIP 1K 5% 1/16W		
854		B	RESISTOR		R7450	1-208-927-11	METAL CHIP 47K 0.5% 1/16W		
855		B	RESISTOR		R7451	1-218-965-11	RES-CHIP 10K 5% 1/16W		
856		B	RESISTOR		R7452	1-218-965-11	RES-CHIP 10K 5% 1/16W		
857		B	RESISTOR		R7453	1-218-990-11	SHORT CHIP 0		
858		B	RESISTOR		R7454	1-218-990-11	SHORT CHIP 0		
859		B	RESISTOR		R7455	1-218-990-11	SHORT CHIP 0		
860		B	RESISTOR		R7456	1-208-691-11	METAL CHIP 2.2K 0.5% 1/16W		
861		B	RESISTOR		R7459	1-208-691-11	METAL CHIP 2.2K 0.5% 1/16W		
862		B	RESISTOR		R7460	1-218-849-11	METAL CHIP 1.2K 0.5% 1/10W		
863		B	RESISTOR		R7461	1-208-683-11	METAL CHIP 1K 0.5% 1/16W		
864		B	RESISTOR		R7469	1-218-849-11	METAL CHIP 1.2K 0.5% 1/10W		
865		B	NETWORK		RB1001	1-234-380-21	RES, NETWORK 47K (1005X4)		
866		B	NETWORK		RB1002	1-234-372-21	RES, NETWORK 100 (1005X4)		
867		B	NETWORK		RB1003	1-234-372-21	RES, NETWORK 100 (1005X4)		
868		B	NETWORK		RB1004	1-234-372-21	RES, NETWORK 100 (1005X4)		
869		B	NETWORK		RB1005	1-234-372-21	RES, NETWORK 100 (1005X4)		
870		B	NETWORK		RB1006	1-234-372-21	RES, NETWORK 100 (1005X4)		
871		B	NETWORK		RB1007	1-234-372-21	RES, NETWORK 100 (1005X4)		
872		B	NETWORK		RB1008	1-234-372-21	RES, NETWORK 100 (1005X4)		
873		B	NETWORK		RB1009	1-234-372-21	RES, NETWORK 100 (1005X4)		
874		B	NETWORK		RB1010	1-234-372-21	RES, NETWORK 100 (1005X4)		
875		B	NETWORK		RB1011	1-234-378-21	RES, NETWORK 10K (1005X4)		
876		B	NETWORK		RB1012	1-234-372-21	RES, NETWORK 100 (1005X4)		
877		B	NETWORK		RB1013	1-234-372-21	RES, NETWORK 100 (1005X4)		
878		B	NETWORK		RB1014	1-234-372-21	RES, NETWORK 100 (1005X4)		
879		B	NETWORK		RB1015	1-234-372-21	RES, NETWORK 100 (1005X4)		
880		B	NETWORK		RB1016	1-234-375-21	RES, NETWORK 1K (1005X4)		
881		B	NETWORK		RB1017	1-234-372-21	RES, NETWORK 100 (1005X4)		
882		B	NETWORK		RB1018	1-234-372-21	RES, NETWORK 100 (1005X4)		
883		B	NETWORK		RB1019	1-234-372-21	RES, NETWORK 100 (1005X4)		
884		B	NETWORK		RB1020	1-234-378-21	RES, NETWORK 10K (1005X4)		
885		B	NETWORK		RB1021	1-234-372-21	RES, NETWORK 100 (1005X4)		
886		B	NETWORK		RB1022	1-234-372-21	RES, NETWORK 100 (1005X4)		
887		B	NETWORK		RB5500	1-234-370-21	RES, NETWORK 22 (1005X4)		
888		B	NETWORK		RB5501	1-234-370-21	RES, NETWORK 22 (1005X4)		

No.	#	Board	Type	$\Delta$ /*	Ref. No.	Part No.	Description	Remarks-1	Remarks-2
889		B	NETWORK		RB5502	1-234-370-21	RES, NETWORK 22 (1005X4)		
890		B	NETWORK		RB5503	1-234-370-21	RES, NETWORK 22 (1005X4)		
891		B	NETWORK		RB5504	1-234-370-21	RES, NETWORK 22 (1005X4)		
892		B	NETWORK		RB5505	1-234-370-21	RES, NETWORK 22 (1005X4)		
893		B	NETWORK		RB5506	1-234-370-21	RES, NETWORK 22 (1005X4)		
894		B	NETWORK		RB5507	1-234-370-21	RES, NETWORK 22 (1005X4)		
895		B	NETWORK		RB5509	1-234-370-21	RES, NETWORK 22 (1005X4)		
896		B	NETWORK		RB5510	1-234-370-21	RES, NETWORK 22 (1005X4)		
897		B	NETWORK		RB5511	1-234-370-21	RES, NETWORK 22 (1005X4)		
898		B	NETWORK		RB5512	1-234-370-21	RES, NETWORK 22 (1005X4)		
899		B	THERMISTOR		TH7400	1-809-350-21	THERMISTOR, NTC (2125)		
900		B	VARISTOR		VD5400	1-803-974-21	VARISTOR, CHIP (1608)		
901		B	VARISTOR		VD5401	1-803-974-21	VARISTOR, CHIP (1608)		
902		B	VARISTOR		VD5402	1-803-974-21	VARISTOR, CHIP (1608)		
903		B	VARISTOR		VD5403	1-803-974-21	VARISTOR, CHIP (1608)		
904		B	VARISTOR		VD5404	1-803-974-21	VARISTOR, CHIP (1608)		
905		B	CRYSTAL		X1001	1-813-326-21	VIBRATOR, CRYSTAL		
906		B	CRYSTAL		X5000	1-795-790-11	VIBRATOR, CRYSTAL		
907		B	CRYSTAL		X5302	1-795-029-41	VIBRATOR, CRYSTAL		

